

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: **+49 - (0)81 41 - 52 71-0**

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany


Tel. **+49 - (0)81 41 - 52 71-0** E-
Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

www.meilhaus.com

Ethernet I/O: BusWorks® XT Series

XTA-MRNO Mechanical Relay Output Modules

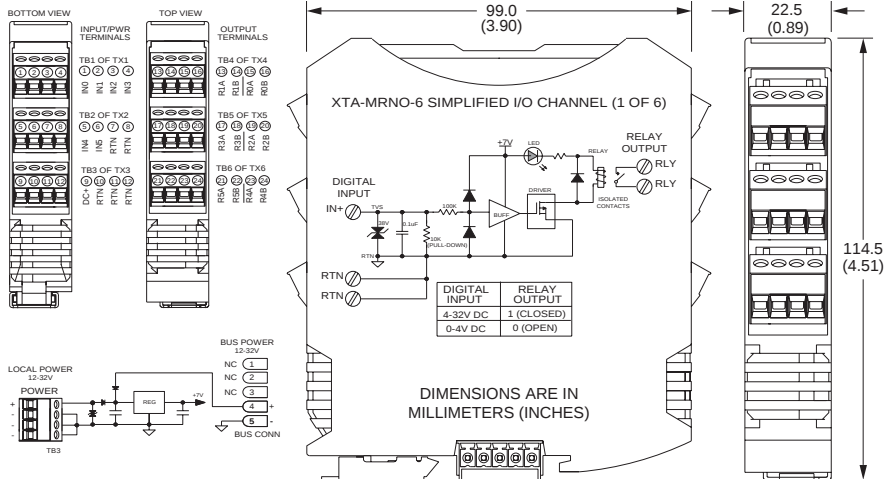

6 discrete input/output channels ♦ Form A normally open SPST 5A relays ♦ 4-32V logic input

Description

The XTA-MRNO-6 is an interposing relay module with six digital inputs and six mechanical relay outputs. It is intended for use with BusWorks XT Series discrete I/O or other digital output modules for the purpose of driving high energy loads. This module serves as an interim digital interface to switch high voltage devices at high currents based on digital logic inputs. Each pair of output contacts are individually isolated.

These modules are very easy to use. Removable front-facing terminal blocks on the module's top and bottom greatly simplify field wiring. Individual channel LEDs indicate the output state for convenient troubleshooting.

Rugged construction and high density design combine for a very effective I/O solution. These units are ideal for remote monitoring, distributed control, or SCADA applications.

Input Ranges

4-32V digital logic (0V OFF, 4-32V ON)

Output Ranges

Relays drive up to 250V AC / 30V DC at 5A

Power Requirement

12 to 32V DC

Key Features & Benefits

- Six buffered digital logic inputs
- Six mechanical relay outputs
- Normally open, sealed, Form A mechanical relay contacts (SPST-NO)
- Switches both AC and DC voltage loads
- 1500V AC isolation (between each I/O channel and power) and surge/transient protection
- High-Density 22.5mm wide package with pluggable, front-facing terminals
- Individual LEDs for each channel
- Supports bussed/rail and redundant power
- -40°C to +80°C wide temperature operation
- Withstands 25g shock and 4g vibration
- CE and UL/cUL Class 1 Div 2 Zone 2 approvals. ATEX Certified.



Ethernet I/O: BusWorks® XT Series

XTA-MRNO Mechanical Relay Output Modules

Performance Specifications

Digital Inputs (Logic Side)

Configuration

Six DC voltage inputs share return with power.

Input Signal Voltage Range

0 to +32V DC, 36V peak.

Input Signal Threshold

4V DC typical w/100mV hysteresis.

Input Impedance

10KΩ typical, input includes 10KΩ pull-down to return.

Input Response Time

See Output Response Time.

Input Over-Voltage Protection

Bipolar transient voltage suppression (TVS diodes) and capacitive filtering (0.1μF) is included at every input. TVS diodes are rated for a working voltage up to 38V DC, a breakdown voltage of 72V DC, and a clamping voltage of 100V DC.

Input Current

3.2 mA at 32V DC, typical. Inputs include 10KΩ pull-downs to return.

Relay Outputs (Field Side)

Configuration

Six normally open, isolated, SPST, mechanical relay contacts.

Contact Type

1 Form A (Six Channels), plastic-sealed contacts.

Contact Material

Gold overlay silver-Nickel alloy (Au + Ag 90 Ni 10).

Maximum Switching Voltage

Up to 277 V AC or 125V DC, maximum.

Maximum Switching Current

5A maximum.

Minimum Load

1mA, 5V DC

Maximum Switching Power

Up to 1,250VA or 150W, maximum.

Contact Resistance

1000mΩ at 500V DC, minimum (initial contact resistance).

Dielectric Strength

750V AC (50/60Hz) for 1 minute between open contacts, 3000V AC (50/60Hz) for 1 minute from contacts to input coil.

Mechanical Life

20 x 10⁶ operations, minimum. External contact protection is required for use with inductive loads.

Electrical Life

100 x 10³ operations, minimum at 3A & 250V AC, 30V DC resistive. 50 x 10³ operations, minimum at 5A & 250V AC, 30V DC resistive w/ switching frequency at 20 times/minute.

Note: It is not recommended to switch mechanical relay contacts at high frequencies for long periods of time as this will quickly degrade the life of the relay.

Output Response Time

5.25ms typical, 10ms maximum, no bounce measured from input trigger to corresponding output contact closure.

Note: External relay contact protection is required for use with inductive loads. Failure to use adequate protection may reduce contact life or damage the unit.

Environmental

Operating Temperature

-40 to 80°C (-40 to 176°F).

Storage Temperature

-40 to 80°C (-40 to 176°F).

Relative Humidity

5 to 95% non-condensing.

Power Requirement

12–32V DC SELV (Safety Extra Low Voltage), 0.9W. Current draw varies with power voltage as follows (current indicated is with all six relays energized).

Power Supply	Current Draw
12V DC	62mA typical, 68mA maximum
15V DC	50mA typical, 55mA maximum
24V DC	32mA typical, 35mA maximum
32V DC	25mA typical, 27mA maximum

Isolation

Channel-to-channel and power isolation.

Peak: 1500V AC, ANSI/ISA-82.01-1988.

Continuous: 250V AC, 354V DC.

Shock and Vibration Immunity

Vibration: 4g, per IEC 60068-2-64.

Shock: 25g, per IEC 60068-2-27.

Electromagnetic Compatibility (EMC) Compliance

Radiated Emissions: BS EN 61000-6-4, CISPR 16.

RFI: BS EN 61000-6-2, IEC 61000-4-3.

Conducted RFI: BS EN 61000-6-2, IEC 61000-4-6.

ESD: BS EN 61000-6-2, IEC 61000-4-2.

EFT: BS EN 61000-6-2, IEC 61000-4-4.

Surge Immunity: BS EN 61000-6-2, IEC 61000-4-5.

Approvals

CE compliant. UL/cUL listings. ATEX Certified.

Designed for Class I; Division 2; Groups ABCD; Zone 2.

Physical

General

General purpose plastic enclosure for mounting on 35mm "T-type" DIN rail.

Case Material

Self-extinguishing polyamide, UL94 V-0 rated, color light gray. General purpose NEMA Type 1 enclosure.

Circuit Board

Military grade fire-retardant epoxy glass per IPC-4101/98 with humi-seal conformal coating.

I/O Connectors

Removable plug-in type terminal blocks rated for 12A/250V; AWG #26-12, stranded/solid copper wire.

Dimensions

Width = 22.5mm (0.9 inches), Length = 114.5mm (4.51 inches), Depth = 99.0mm (3.90 inches).

Shipping Weight

0.5 pounds (0.22 Kg) packed.

Ordering Information

Models

[Go to on-line ordering page >](#)

XTA-MRNO-6

6-channel mechanical relay output module

Accessories

XT BUS-KIT

DIN rail bus power/excitation connector kit. Includes one DIN rail bus connector (1005-070), one left-side female connector terminal block (1005-220) and one right-side male connector terminal block (1005-221).

ISO9001
AS9100



Acromag
THE LEADER IN INDUSTRIAL I/O