

## Product Datasheet - Technical Specifications



More information in our Web-Shop at ► [www.meilhaus.com](http://www.meilhaus.com) and in our download section.

### Your contact

**Technical and commercial sales, price information,  
quotations, demo/test equipment, consulting:**

Tel.: **+49 - 81 41 - 52 71-0**

FAX: **+49 - 81 41 - 52 71-129**

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

Downloads:

[www.meilhaus.com/en/infos/download.htm](http://www.meilhaus.com/en/infos/download.htm)

**Meilhaus Electronic GmbH** | Tel. **+49 - 81 41 - 52 71-0**  
Am Sonnenlicht 2 | Fax **+49 - 81 41 - 52 71-129**  
82239 Alling/Germany | E-Mail [sales@meilhaus.com](mailto:sales@meilhaus.com)


Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.  
© Meilhaus Electronic.

[www.meilhaus.de](http://www.meilhaus.de)

# Data Sheet

## Switching DC Power Supply with USB Charger Output 1-36 V, 0-3 A

### Model 1550

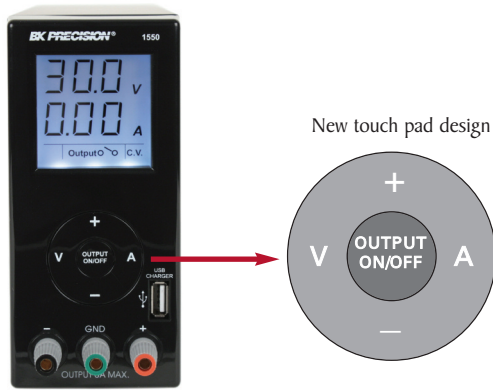

The model 1550 is a compact 108 watt power supply delivering 1-36 V and 0-3 A from its main isolated output. A unique feature of the 1550 supply is the USB charging port located on the front panel allowing the user to charge a cell phone or MP3 player. Clean power and quiet operation make this power supply ideal for any bench in laboratories, work shops and schools where bench space is limited.

#### Features:

- USB charging port on front panel
- Rear panel security loop
- Compact design
- Output On/Off control
- Large bright easy to read LCD display
- Constant voltage and constant current operation
- Overvoltage protection
- 230 VAC version with banana style outputs (model 1550-220V)



#### USB Charging Port

Charge your cell phone or MP3 player while you work



Specifications	1550
<b>MAIN OUTPUT</b>	
Output Voltage Adjustable Range	1.0 – 36 VDC
Output Current Adjustable Range	0 – 3 A
Voltage Regulation	
Load (10 % to 100 %)	±50 mV
Line (min to max)	±20 mV
Ripple	±5 mV rms
Noise (Peak to Peak)	±50 mV
Current Regulation	
Load (10 % to 100 %)	±20 mA
Line (min to max)	±20 mA
<b>USB OUTPUT</b>	
Output Voltage	5 V (±10 %)
Output Current	400 mA (±10 %)
Load Voltage Regulation	80 mV (±10 %)
Ripple & Noise (no load rms)	8 mV (±10 %)
<b>OTHER</b>	
AC Input	100 – 120 Vac (50~60 Hz)*
Efficiency at Max Power	83 % (±10 %)
Voltmeter and Ammeter Display	3 Digit
Voltmeter Accuracy	±1 % of rdg. ± 5 digits
Switching Operation Frequency	80 kHz to 120 kHz
Ammeter Accuracy	±1 % of rdg. ± 5 digits
Full Load Input Current at 120 Vac	1.8 A (±10 %)
LCD Indication	CC, CV, Amp, Volt, Output ON-OFF
<b>GENERAL</b>	
Protection	Short Circuit, Overload, Over Temperature, Over Voltage
Dimensions (W x H x D)	2.8" x 6.0" x 9.8" (70 x 150 x 250 mm)
Weight	4.4 Lbs. (2 kgs)
<b>One-Year Warranty</b>	
Supplied Accessories	User manual and power cord

\*For 230V input, order model number 1550-220V.

#### Rear Panel Security Loop

Secure the power supply to a work station to prevent unwanted removal

