



Product Datasheet - Technical Specifications



More information in our Web-Shop at ▶ www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

FAX: +49 - (0)81 41 - 52 71-129

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. +49 - (0)81 41 - 52 71-0
Fax +49 - (0)81 41 - 52 71-129
E-Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

www.meilhaus.com


BusWorks® NT Series Expandable Remote I/O Modules For Ethernet

- Analog and Digital I/O Modules
- Modbus/TCP, Ethernet/IP and Profinet
- IIoT or Peer-to-Peer Communication
- IF/Then/Else Control Logic

Industrial I/O Solutions You Can Depend On.



ISO9001
AS9100
 MADE IN USA



Expandable Remote I/O

Acromag's Busworks® NT Series lets you add expansion I/O modules for a high-density, cost-efficient remote I/O solution


Base unit NTE Ethernet models handle the network communication and interface up to 16 analog or digital I/O channels for remote monitoring or control applications. NTX Expansion models provide a cost-effective way to add a mix of I/O signal types under a single IP address.

Multi-protocol support


The NTE Ethernet I/O modules are pre-programmed to support Modbus/TCP, EtherNet/IP® and Profinet® protocols. Just select which is to be used. Modules also support direct i2o® peer-to-peer communication without a master.

- Integrated I/O expansion bus
- Up to 64 I/O channels per port
- Mix analog, digital, and temperature I/O on one port
- i2o peer-to-peer or multicast communications
- Rugged design, -40 to 70°C
- Hazardous location approvals

*coming soon

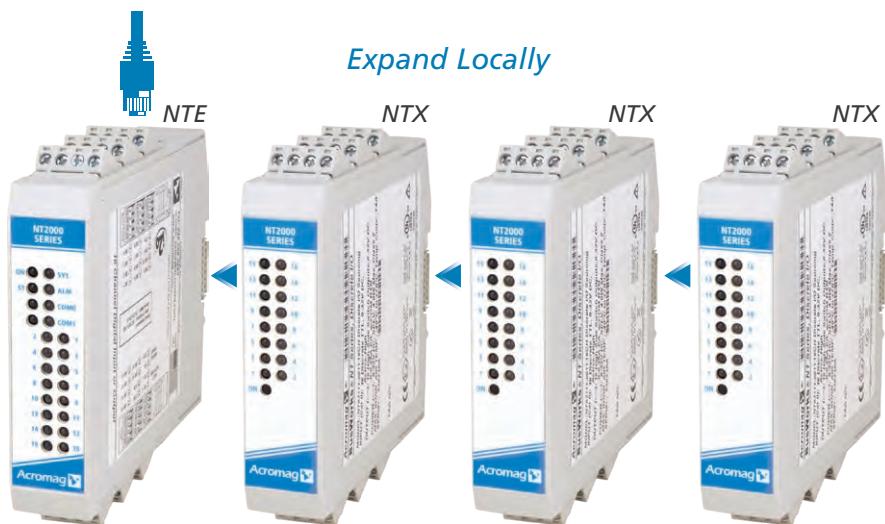

Link up to three NTX expansion I/O modules to an NTE Ethernet I/O module over the integrated DIN rail I/O bus connectors.

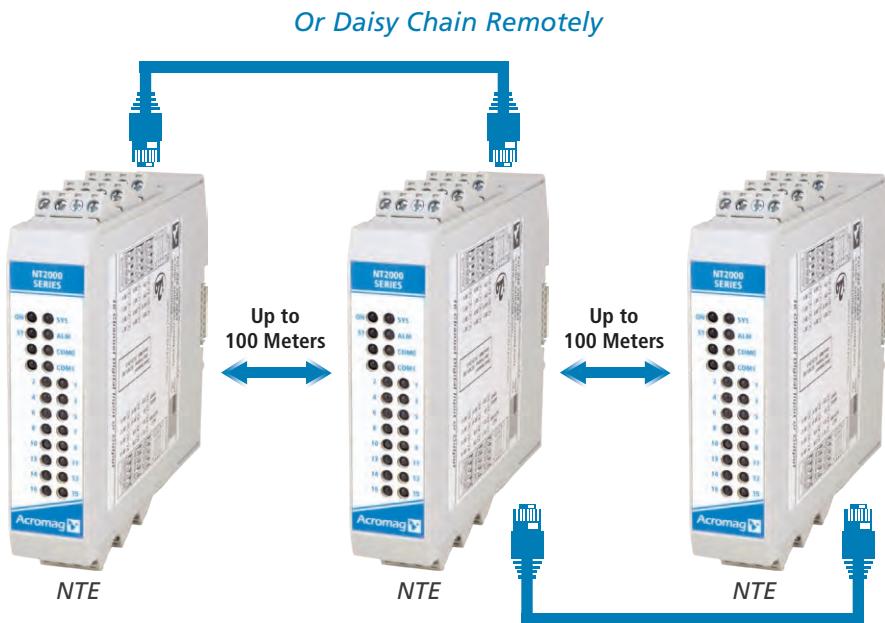

Connect NTE Ethernet I/O modules with a daisy-chain topology using the internal dual-port switch to simplify network cabling.

I/O Support	Input Modules	Output Modules
DC Current	8 differential or 16 single-ended channels	8 output channels
DC Voltage	8 differential or 16 single-ended channels	8 output channels
Thermocouple	8 channels of Type J, K, T, R, S, B, E, N, or mV	
RTD/Resistance	4 channels PT100, Cu10, 0-500 ohms.	
Digital I/O	16 channels	16 channels
Relays, Contact Closures	6 channels 120/240V AC	6 normally open 5A relays

Ethernet-based Configuration



Easy setup from anywhere with a web browser

NTE Ethernet I/O modules have a built-in web server for convenient configuration without installing any software. Several web pages lead you through the options to set your IP addresses, protocol, and I/O parameters. A diagnostics page lets you monitor I/O values from your PC, tablet, or smartphone.

Advanced features for IIoT and local control logic functions

The configuration pages will help you quickly setup advanced capabilities such as peer-to-peer communication, conditional logic computation, and alarm output.

- Peer-to-peer communication
- Counter/timers
- IF/THEN/ELSE logic*
- Alarm output*
- RESTful APIs*
- OPC-UA server*
- MQTT support*
- Field-upgradeable

* Coming soon.

I/O Config

Slot 0: Analog Current In Board (Single-Ended)

The following options are unique for each channel:

Channel: Channel 1

Current Range: ±20mA

Change Range: ±20mA

The following options are shared for all channels:

Current Filter Selection: Low Filter: 80 ms

Change Filter Selection: High Filter: 480 ms

Burnout Current Enable: Off

ADC Settling Delay: 0 µs

Change ADC Settling Delay: 0 µs


Changes Slot 0 Configuration

I2O Config

Slot Number	Starting I/O Channel	# of Channels	Target IP Address	Starting Target Register	Update Time	Change of State	Percent Change
Slot 1: Thermocouple	Channel 4	8	192.168.0.10	00000	0 ms	N/A	10.5%
Slot 0: Digital I/O Board (Sourcing With 10k Pulldown)	Channel 2	8	0.0.0.0	00000	0 ms	OFF	N/A
Slot 0: Digital I/O Board (Sourcing With 10k Pulldown)	Channel 2	8	0.0.0.0	00000	0 ms	OFF	N/A
Slot 0: Digital I/O Board (Sourcing With 10k Pulldown)	Channel 2	8	0.0.0.0	00000	0 ms	OFF	N/A
Slot 0: Digital I/O Board (Sourcing With 10k Pulldown)	Channel 2	8	0.0.0.0	00000	0 ms	OFF	N/A
Slot 0: Digital I/O Board (Sourcing With 10k Pulldown)	Channel 2	8	0.0.0.0	00000	0 ms	OFF	N/A
Slot 0: Digital I/O Board (Sourcing With 10k Pulldown)	Channel 2	8	0.0.0.0	00000	0 ms	OFF	N/A
Slot 0: Digital I/O Board (Sourcing With 10k Pulldown)	Channel 2	8	0.0.0.0	00000	0 ms	OFF	N/A

Slot 1: Digital I/O Board (Relay)

1 Input	2 Input	3 Input	4 Input	5 Input	6 Input
1 Output	2 Output	3 Output	4 Output	5 Output	6 Output
Toggle Output					
Counter: 755	Counter: 0	Counter: 555	Counter: 0	Counter: 0	Counter: 0
Reset Counter					



Common Specifications

Network Communication

Interface: 10/100Mbps Ethernet

Protocols: Modbus TCP/IP, Ethernet/IP, or Profinet and i2o® peer-to-peer / multi-cast

IIoT communication: OPC-UA, MQTT, RESTful APIs (pending)

Connectors: Two shielded 8-pin RJ-45 sockets, 10BaseT/100BaseTX

Approvals and Certifications

CE marked

UL/cUL Class I; Div. 2;
Groups A, B, C, D (pending)

ATEX/IECEx Zone 2 (pending)

EtherNet/IP, Modbus/TCP, Profinet conformance (pending)

Radiated Emissions: BS EN 61000-6-4,
CISPR 16

RFI: BS EN 61000-6-2, IEC 61000-4-3

Conducted RFI: BS EN 61000-6-2,
IEC 61000-4-6

ESD: BS EN 61000-6-2, IEC 61000-4-2

EFT: BS EN 61000-6-2, IEC 61000-4-4

Surge Immunity: BS EN 61000-6-2,
IEC 61000-4-5

Environmental

Temperature ranges:

Operation: -40 to 70°C (-40 to 158°F)

Storage: -40 to 85°C (-40 to 185°F)

Relative humidity:

5 to 95% non-condensing

Vibration: 4g, per IEC 60068-2-64

Shock: 25g, per IEC 60068-2-27

Isolation: 1500V AC for 60 seconds
or 250V AC continuous between I/O,
network, and power

Power requirement: 9 to 32V DC SELV,
2.0W max (83mA maximum @ 24V)

Physical

Housing: General purpose plastic enclosure for mounting on 35mm "T-type" DIN rail

Case Material: Self-extinguishing polyamide, UL94 V-0 rated, general purpose NEMA Type 1

Circuit Board: Military grade fire-retardant epoxy glass (IPC-4101/98)

I/O Connectors: Removable terminal blocks rated for 12A/250V; AWG #26-12, stranded/solid copper wire

Dimensions (W x H x D):
25.0 x 116.9 mm (0.98 x 4.6 inches)

NTE: 139.2 mm (5.48 inches)

NTX: 116.65 mm (4.59 inches)

Weight:

NTE models: 0.5 lbs (0.23 Kg)

NTX models: 0.3 lbs (0.14 Kg)

Models: Ethernet I/O Units

NTE2111-1111 Dual RJ45 ports, discrete I/O, sinking output, 16-ch

NTE2121-1111 Dual RJ45 ports, discrete I/O, sourcing output, 16-ch

NTE2131-1111 Dual RJ45 ports, discrete I/O, relay output, 6 MR + 6 DI

NTE2141-1111 Dual RJ45 ports, discrete I/O, 120/240V AC input, 6 DI + 6 DO

NTE2211-1111 Dual RJ45 ports, analog input, differential current, 8 AI + 2 DIO

NTE2221-1111 Dual RJ45 ports, analog input, single-ended current, 16-ch

NTE2231-1111 Dual RJ45 ports, analog input, differential voltage, 8 AI + 2 DIO

NTE2241-1111 Dual RJ45 ports, analog input, single-ended voltage, 16-ch

NTE2311-1111 Dual RJ45 ports, analog output, current, 8-ch

NTE2321-1111 Dual RJ45 ports, analog output, voltage, 8-ch

NTE2511-1111* ... Dual RJ45 ports, combo I/O, 4 AI + 2 AO + 4 DIO

NTE2611-1111 Dual RJ45 ports, temperature input, 8 thermocouple + 2 DIO

NTE2621-1111* ... Dual RJ45 ports, temperature input, 4 RTD + 2 DIO

Models: Expansion I/O Units

NTX2111-0011 discrete I/O, sinking output, 16-ch

NTX2121-0011 discrete I/O, sourcing output, 16-ch

NTX2131-0011 discrete I/O, relay output, 6 MR + 6 DI

NTX2141-0011 discrete I/O, 120/240V AC input, 6 DI + 6 DO

NTX2211-0011 analog input, differential current, 8 AI + 2 DIO

NTX2221-0011 analog input, single-ended current, 16-ch

NTX2231-0011 analog input, differential voltage, 8 AI + 2 DIO

NTX2241-0011 analog input, single-ended voltage, 16-ch

NTX2311-0011 analog output, current, 8-ch

NTX2321-0011 analog output, voltage, 8-ch

NTX2511-0011* ... combo I/O, 4 AI + 2 AO + 4 DIO

NTX2611-0011 temperature input, 8 thermocouple + 2 DIO

NTX2621-0011* ... temperature input, 4 RTD + 2 DIO

*coming soon

Dimensions: Units in millimeters (inches)

NTE



NTX

