


# **Product Datasheet - Technical Specifications**

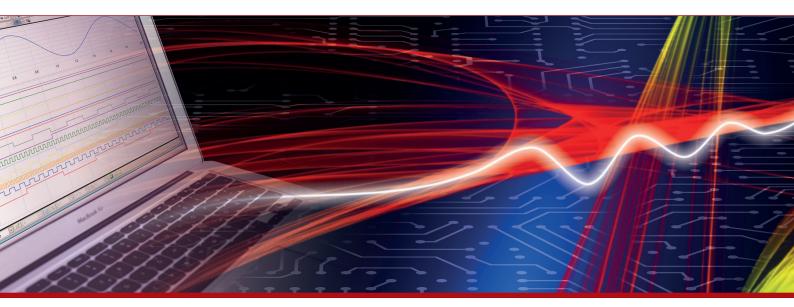

More information in our Web-Shop at **www.meilhaus.com** and in our download section.

#### Your contact

Technical and commercial sales, price information, quotations, demo/test equipment, consulting:

Tel.: +49 - 81 41 - 52 71-0

FAX: +49 - 81 41 - 52 71-129

E-Mail: sales@meilhaus.com

Downloads:

www.meilhaus.com/en/infos/download.htm

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. +49 - 81 41 - 52 71-0 Fax +49 - 81 41 - 52 71-129 E-Mail sales@meilhaus.com

www.meilhaus.de

Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.

© Meilhaus Electronic.

## DSCA32







## **Description**

Each DSCA32 current input module provides a single channel of analog input which is filtered, isolated, amplified, and converted to a high-level voltage output (Figure 1). Signal filtering is accomplished with a five-pole filter which is optimized for step response. An anti-aliasing pole is located on the field side of the isolation barrier, and the other four poles are on the system side. After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges.

**Analog Current Input Signal Conditioners** 

Module output is either voltage or current. For current output models a dedicated loop supply is provided at terminal 3 (+OUT) with loop return located at terminal 4 (-OUT). The system-side load may be either floating or grounded.

Special input circuits provide protection against accidental connection of power-line voltages up to 240VAC and against transient events as defined by ANSI/IEEE C37.90.1. Protection circuits are also present on the signal output and power input terminals to guard against transient events and power reversal. Signal and power lines are secured to the module using screw terminals which are in pluggable terminal blocks for ease of system assembly and reconfiguration.

The modules have excellent stability over time and do not require recalibration, however, zero and span settings are adjustable up to  $\pm 5\%$  to accommodate situations where fine-tuning is desired. The adjustments are made using potentiometers located under the front panel label and are non-interactive for ease of use.

#### **Features**

- · Accepts Milliamp Level Signals
- Industry Standard Output of 0 to +10V, 0 to 20mA, or 4 to 20mA
- 1500Vrms Transformer Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 240VAC Continuous
- True 3-Way Isolation
- Wide Range of Supply Voltage
- 105dB CMR
- 5 Poles of Filtering
- ±0.03% Accuracy
- ±0.01% Linearity
- Easily Mounts on Standard DIN Rail
- · C-UL-US Listed
- CE and ATEX Compliant

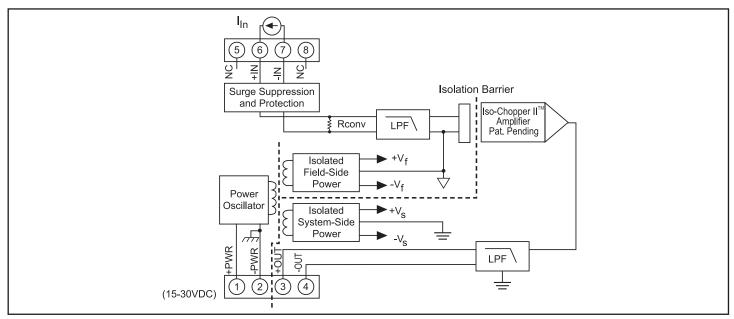


Figure 1: DSCA32 Blok Diagram



### **Specifications** Typical\* at T<sub>A</sub> = +25°C and +24VDC supply voltage

| Typical at 1 <sub>A</sub> = +23 C and +24 V DC supply voltage  |   |  |  |  |
|--|---|--|--|--|
| Module   | DSCA32  |  |  |  |
| Input Range Input Resistance Normal Power Off Overload Input Protection Continuous   | 0-20mA or 4-20mA  <100Ω <100Ω 65kΩ  240Vrms max   |  |  |  |
| Transient  | ANSI/IEEE C37.90.1  |  |  |  |
| Output Range<br>Load Resistance (I <sub>OUT</sub> )<br>Current Limit<br>Output Protection  | See Ordering Information<br>600Ω max<br>8mA (V <sub>out</sub> ), 30mA (I <sub>out</sub> )   |  |  |  |
| Short to Ground Transient CMV, Input to Output, Input to Power   | Continuous<br>ANSI/IEEE C37.90.1  |  |  |  |
| Continuous Transient CMV, Output to Power  | 1500Vrms max<br>ANSI/IEEE C37.90.1  |  |  |  |
| Continuous<br>CMR (50Hz or 60Hz)   | 50VDC max<br>105dB  |  |  |  |
| Accuracy <sup>(1)</sup> Linearity Adjustability Stability  | ±0.03% Span<br>±0.01% Span<br>±5% Zero and Span   |  |  |  |
| Offset<br>Gain<br>Output Noise, 100kHz Bandwidth   | $\pm 6$ ppm/°C ( $V_{\text{OUT}}$ ), $\pm 20$ ppm/°C ( $I_{\text{OUT}}$ )<br>$\pm 40$ ppm/°C<br>$300$ µVrms ( $V_{\text{OUT}}$ ), 1µArms ( $I_{\text{OUT}}$ ) |  |  |  |
| Bandwidth, –3dB<br>NMR (–3dB at 100Hz)<br>Response Time, 90% Span  | 100Hz<br>100dB per Decade above 100Hz<br>5ms  |  |  |  |
| Power Supply Voltage Current Sensitivity Protection  | 15 to 30VDC<br>25mA (V <sub>out</sub> ), 55mA (I <sub>out</sub> )<br>±0.0001% %   |  |  |  |
| Reverse Polarity<br>Transient  | Continuous<br>ANSI/IEEE C37.90.1  |  |  |  |
| Mechanical Dimensions (h)(w)(d)  | 2.95" x 0.89" x 4.13"<br>(75mm x 22.5mm x 105mm)  |  |  |  |
| Mounting   | DIN EN 50022 -35x7.5 or -35x15 rail   |  |  |  |
| Environmental Operating Temperature Range Storage Temperature Range Relative Humidity Emissions EN61000-6-4 Radiated, Conducted Immunity EN61000-6-2 RF ESD, EFT | -40°C to +80°C -40°C to +80°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B                           |  |  |  |
|  |   |  |  |  |

#### NOTES:

## **Ordering Information**

| DSCA32-01 4mA to 20mA 2, 3, 4 | Model     | Input Range | Output Range †          |
|-------------------------------|-----------|-------------|-------------------------|
| DSCA32-03 ±20mA 1             | DSCA32-02 | 0mA to 20mA | 2, 3, 4<br>2, 3, 4<br>1 |

### †Output Ranges Available

| Output Range                                      | Part No. Suffix | Example                 |
|---|-----------------|-------------------------|
| 1. –10V to +10V                                   | NONE            | DSCA32-03               |
| <ol> <li>OV to +10V</li> <li>4 to 20mA</li> </ol> | NONE<br>C       | DSCA32-01<br>DSCA32-01C |
| 4. 0 to 20mA                                      | Ĕ               | DSCA32-01E              |

#### Installation Notes:

- 1.) This Equipment is Suitable for Use in Class I, Division 2, Groups A, B,C, D, or Non-Hazardous Locations Only.
- 2.) WARNING Explosion Hazard Substitution of Components May Impair Suitability for Class I, Division 2.
- 3.) WARNING Explosion Hazard Do Not Disconnect Equipment Unless Power Has Been Switched Off or The Area is Known to be Non-Hazardous.
- 4.) The Power to These Devices Shall Be Limited By an Over-Current Protection Device, UL Certified Fuse (JDYX/JDYX2) Rated 6A Max.

<sup>\*</sup>Contact factory or your local Dataforth sales office for maximum values.

<sup>(1)</sup> Includes linearity, hysteresis and repeatability.