

## Product Datasheet - Technical Specifications



More information in our Web-Shop at ► [www.meilhaus.com](http://www.meilhaus.com) and in our download section.

### Your contact

Technical and commercial sales, price information,  
quotations, demo/test equipment, consulting:

Tel.: **+49 - 81 41 - 52 71-0**

FAX: **+49 - 81 41 - 52 71-129**

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

Downloads:

[www.meilhaus.com/en/infos/download.htm](http://www.meilhaus.com/en/infos/download.htm)

Meilhaus Electronic GmbH | Tel. **+49 - 81 41 - 52 71-0**  
Am Sonnenlicht 2 | Fax **+49 - 81 41 - 52 71-129**  
82239 Alling/Germany | E-Mail [sales@meilhaus.com](mailto:sales@meilhaus.com)

Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.  
© Meilhaus Electronic.




# M300 Series Data Acquisition/ Switch System

- Up to 320 switch channels per mainframe, save on cost of ownership
- Can be run without PC
- USB logging
- Interval scanning with storage of up to 100,000 time-stamped readings
- 8 kinds of cards supported
- 6<sup>1/2</sup> DMM can be enabled/disabled in any of slots
- Standard SCPI commands
- Math statistics: AVG, MAX, MIN, SDEV
- 4.3" TFT LCD
- Powerful PC software
- Full Interfaces supported: USB Device, USB Host, GPIB, LAN(LXI-Core Device 2011), RS232

M300 Series Data Acquisition/Switch System with modular structure, which combines precision measurement capability with flexible signal connections, can provide versatile solutions for the applications with multiple points or signals to be tested in product performance test during R&D phase as well as automatic test during production process.


# M300 Series Data Acquisition/Switch System

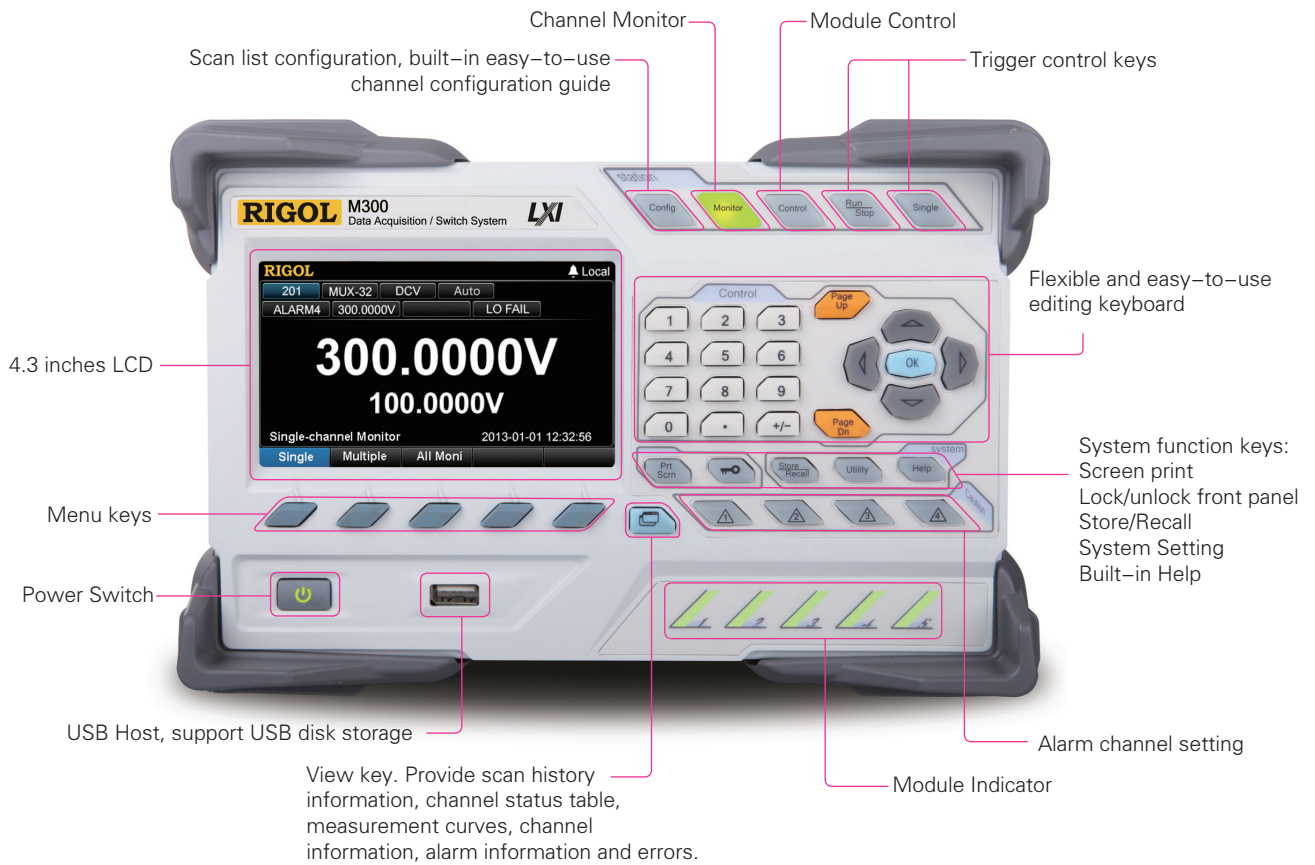


Product Dimensions: Width X Height X Depth=239.0mm×159.0 mm×373.4 mm Weight: 5.7 kg(Without Package)

## ► Feature and Benefits


### • Channel Configuration Guide

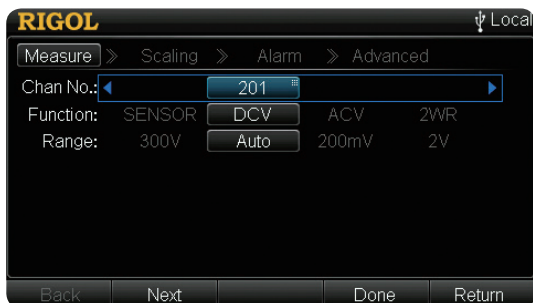


Measurement Configuration

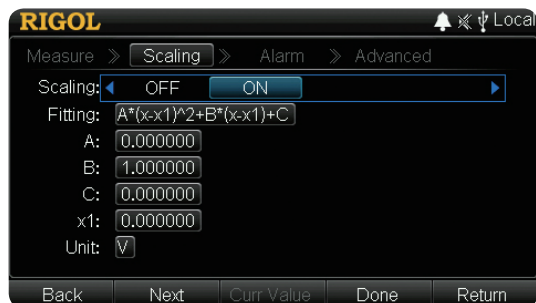

Scaling Configuration

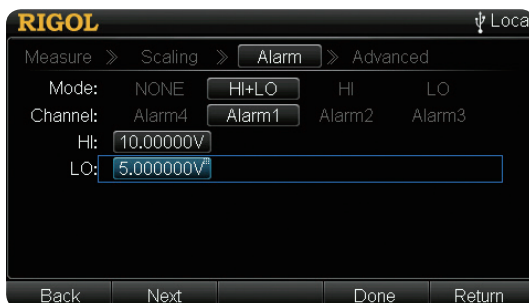

Alarm Configuration

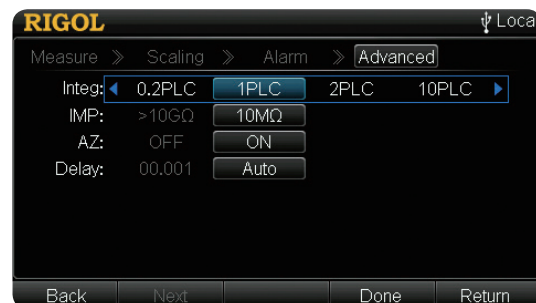


Advanced Configuration

### • Channel Monitor



Single Channel Monitor

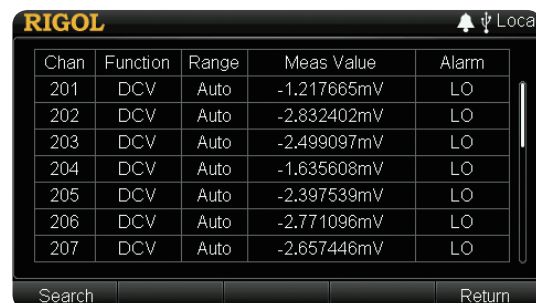

Multiple/All Channel Monitor


### • Multi-View Switch



Display real-time scan information and all the measurement data of the channel selected



Display real-time channel status

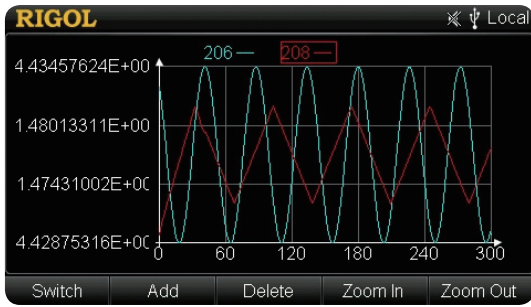

Draw scan data curves

|     |            |     |            |     |            |
|-----|------------|-----|------------|-----|------------|
| 312 | 2938559Cyc | 313 | 2938539Cyc | 314 | 2938537Cyc |
| 315 | 2938497Cyc | 316 | 2938496Cyc | 317 | 2938788Cyc |
| 318 | 2938742Cyc | 319 | 2938746Cyc | 320 | 2938727Cyc |
| 321 | 2938491Cyc | 322 | 2938471Cyc | 323 | 2938684Cyc |
| 324 | 2938673Cyc | 325 | 2938465Cyc | 326 | 2938470Cyc |
| 327 | 2938462Cyc | 328 | 2938459Cyc | 329 | 2938457Cyc |
| 330 | 2938455Cyc | 331 | 2938452Cyc | 332 | 2938453Cyc |
| 397 | 1422989Cyc | 398 | 0Cyc       | 399 | 1418841Cyc |

Record each relay cycle on each module


| Alarm Data | Time               | Channel | Mode | Alarm |
|------------|--------------------|---------|------|-------|
| 994.0293mV | 07-23 14:05:05.000 | 101     | HI   | 1     |
|            |                    |         |      |       |
|            |                    |         |      |       |
|            |                    |         |      |       |
|            |                    |         |      |       |
|            |                    |         |      |       |
|            |                    |         |      |       |

Alarm Information

| No. | Error Info                                       |
|-----|--|
| 1   | -113,"Undefined header; keyword cannot be found" |
| 2   | -113,"Undefined header; keyword cannot be found" |
| 3   | -113,"Undefined header; keyword cannot be found" |
| 4   | -102,"Syntax error"                              |

Error Information

• Multiple Configuration Copy Functions

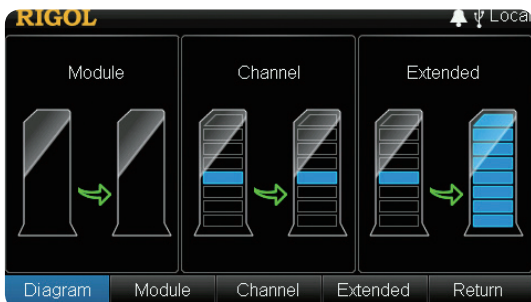

Multiple configuration copy function, can configure multiple channels conveniently and quickly



Module Copy


|                |                 |     |     |     |     |     |     |     |     |
|----------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| SourceChan:101 | TargetChan: 102 |     |     |     |     |     |     |     |     |
| 102            | 103             | 104 | 105 | 106 | 107 | 108 | 109 | 110 | 111 |
| 112            | 113             | 114 | 115 | 116 | 117 | 118 | 119 | 120 | 121 |
| 122            | 123             | 124 | 125 | 126 | 127 | 128 | 129 | 130 | 131 |
| SourceChan:    | TargetChan:101  |     |     |     |     |     |     |     |     |

Channel Copy




Extended Copy


• To Control Each Module Separately

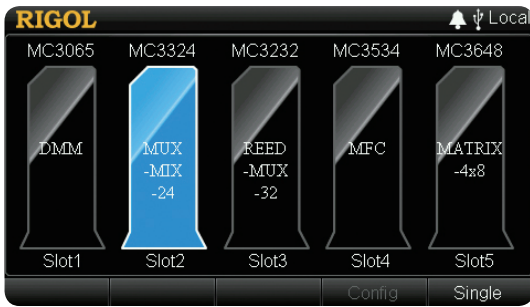


To control each module separately

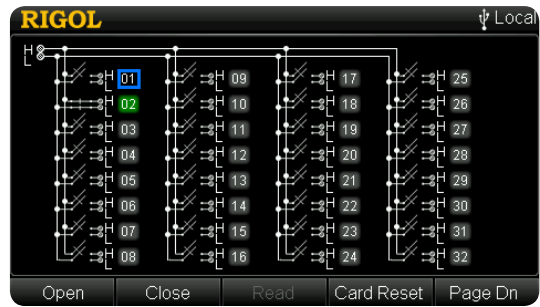


MC3132 Control Interface

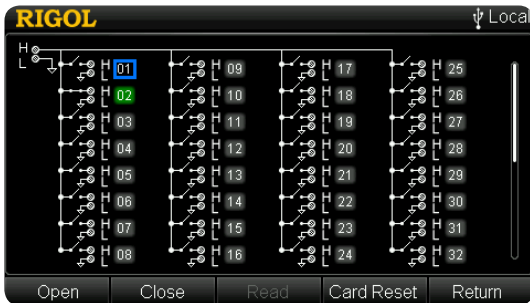


MC3164 Control Interface

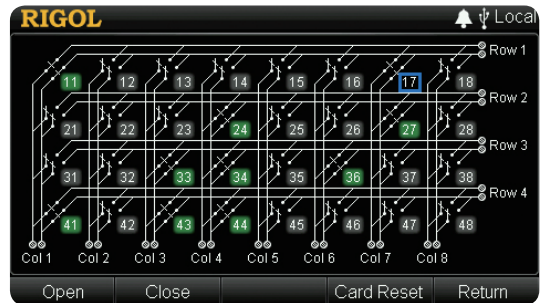

MC3648 Control Interface

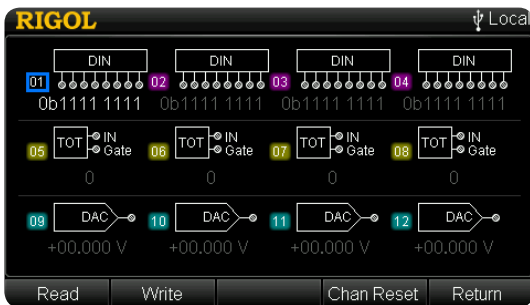


MC3534 Control Interface

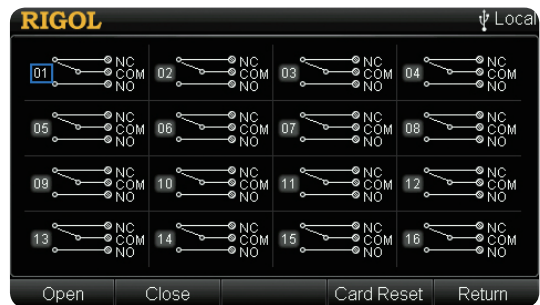


MC3416 Control Interface



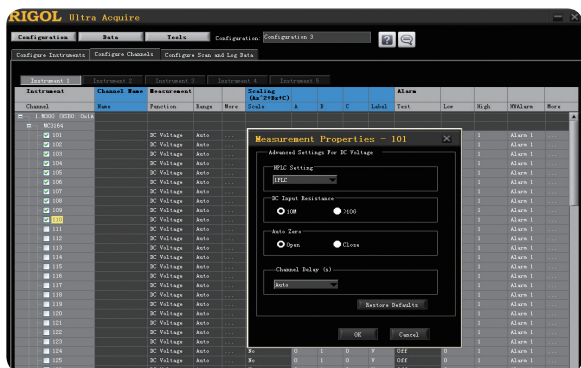



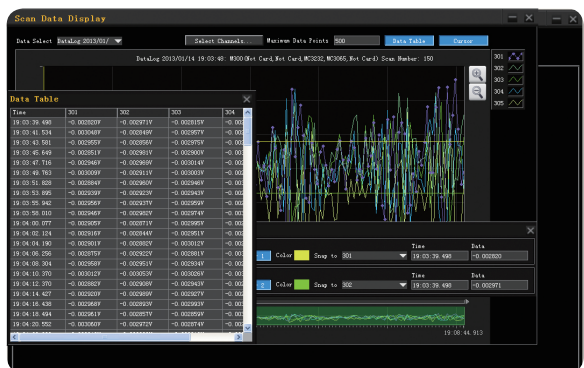






• Channel Configuration of Ultra Acquire




• Data Analysis of Ultra Acquire



## Modules/Terminal Box Supported by M300

| Module  | Terminal Box  | Description  |
|---|---|--|
|  <p>DMM-MC3065</p>     |   | <ul style="list-style-type: none"> <li>• DMM module</li> <li>• Used to measure the signal</li> <li>• 6½ digits</li> <li>• Support the following functions: DCV, ACV, DCI, ACI, 2WR, 4WR, FREQ, PERIOD, TEMP and any sensor</li> <li>• After connecting the DMM module, make sure that the signal under test connected to the analog bus is no greater than 300 Vdc or 300 Vrms</li> </ul>  |
|  <p>MUX20-MC3120</p>   |  <p>TB20</p>   | <ul style="list-style-type: none"> <li>• 20-channel multiplexer</li> <li>• All 20 channels switch both HI and LO inputs</li> <li>• Support 4-wire measurement</li> <li>• The signal to be tested is connected through the TB20 terminal box</li> <li>• Can be connected with MC3065</li> </ul>   |
|  <p>MUX32-MC3132</p>   |  <p>TB32</p>   | <ul style="list-style-type: none"> <li>• 32-channel multiplexer</li> <li>• All 32 channels switch both HI and LO inputs</li> <li>• Support 4-wire measurement</li> <li>• The signal to be tested is connected through the TB32 terminal box</li> <li>• Can be connected with MC3065</li> </ul>   |
|  <p>MUX64-MC3164</p> |  <p>TB64</p> | <ul style="list-style-type: none"> <li>• 64-channel single-ended multiplexer</li> <li>• All 64 channels can switch HI input only</li> <li>• Doesn't support 4-wire measurement</li> <li>• The signal to be tested is connected through the TB64 terminal box</li> <li>• Can be connected with MC3065</li> </ul>  |
|  <p>MIX24-MC3324</p> |  <p>TB24</p> | <ul style="list-style-type: none"> <li>• Mix multiplexer with 20 voltage channels and 4 current channels</li> <li>• All 20 voltage channels switch both HI and LO inputs</li> <li>• 20 voltage channels support 4-wire measurement</li> <li>• 4 current channels are used to measure DC current or AC current</li> <li>• The signal to be tested is connected through the TB24 terminal box</li> <li>• Can be connected with MC3065</li> </ul> |
|  <p>ACT-MC3416</p>   |  <p>TB16</p> | <ul style="list-style-type: none"> <li>• 16-channel actuator</li> <li>• Can connect signal to the device under test or enable external device</li> <li>• Any of the 16 channels can switch to Normally-Open (NO) and Normally-Closed (NC) states</li> <li>• The signal is connected through the TB16 terminal box</li> </ul>   |
|  <p>MFC-MC3534</p>   |  <p>TB34</p> | <ul style="list-style-type: none"> <li>• Multifunction module</li> <li>• DIO: four 8-bit digital input/output ports</li> <li>• TOT: four totalizer input terminals</li> <li>• DAC: four analog output terminals</li> <li>• The signal is connected through the TB34 terminal box</li> </ul>  |



MATRIX-MC3648



TB48

- 4 × 8 two-wire matrix switch
- used to connect multiple devices to multiple points on the device under test
- 32 two-wire cross points which can connect any combination of inputs and outputs at the same time
- The signal is connected through the TB48 terminal box

## ► Specifications

### DC Characteristics

Accuracy Specifications: ± (% of reading + % of range)<sup>[1]</sup>

| Function                  | Range <sup>[2]</sup> | Test Current or Load Voltage | 24 Hour <sup>[3]</sup><br>TCAL °C ± 1°C | 90 Day<br>TCAL °C ± 5°C | 1 Year<br>TCAL °C ± 5°C | Temperature Coefficient<br>0°C to (TCAL °C - 5°C )<br>(TCAL °C + 5°C ) to 50°C |
|---------------------------|----------------------|------------------------------|---|-------------------------|-------------------------|--|
| DC Voltage                | 200.0000mV           | –                            | 0.0020 + 0.0020                         | 0.0030 + 0.0025         | 0.0040 + 0.0025         | 0.0005 + 0.0005  |
|                           | 2.000000V            | –                            | 0.0015 + 0.0005                         | 0.0020 + 0.0006         | 0.0035 + 0.0006         | 0.0005 + 0.0001  |
|                           | 20.00000V            | –                            | 0.0020 + 0.0004                         | 0.0030 + 0.0005         | 0.0040 + 0.0005         | 0.0005 + 0.0001  |
|                           | 200.0000V            | –                            | 0.0020 + 0.0006                         | 0.0040 + 0.0006         | 0.0050 + 0.0006         | 0.0005 + 0.0001  |
|                           | 300.000V             | –                            | 0.0020 + 0.0006                         | 0.0040 + 0.0010         | 0.0055 + 0.0010         | 0.0005 + 0.0001  |
| DC Current                | 200.0000 μ A         | <0.03V                       | 0.010 + 0.012                           | 0.040 + 0.015           | 0.050 + 0.015           | 0.0020 + 0.0030  |
|                           | 2.000000mA           | <0.25V                       | 0.007 + 0.003                           | 0.030 + 0.003           | 0.050 + 0.003           | 0.0020 + 0.0005  |
|                           | 20.00000mA           | <0.07V                       | 0.007 + 0.012                           | 0.030 + 0.015           | 0.050 + 0.015           | 0.0020 + 0.0020  |
|                           | 200.0000mA           | <0.7V                        | 0.010 + 0.002                           | 0.030 + 0.003           | 0.050 + 0.003           | 0.0020 + 0.0005  |
|                           | 1.000000A            | <0.12V                       | 0.050 + 0.020                           | 0.080 + 0.020           | 0.100 + 0.020           | 0.0050 + 0.0010  |
| Resistance <sup>[4]</sup> | 200.0000 Ω           | 1mA                          | 0.0030 + 0.0030                         | 0.008 + 0.004           | 0.010 + 0.004           | 0.0006 + 0.0005  |
|                           | 2.000000k Ω          | 1mA                          | 0.0020 + 0.0005                         | 0.008 + 0.001           | 0.010 + 0.001           | 0.0006 + 0.0001  |
|                           | 20.00000k Ω          | 100 μ A                      | 0.0020 + 0.0005                         | 0.008 + 0.001           | 0.010 + 0.001           | 0.0006 + 0.0001  |
|                           | 200.0000k Ω          | 10 μ A                       | 0.0020 + 0.0005                         | 0.008 + 0.001           | 0.010 + 0.001           | 0.0006 + 0.0001  |
|                           | 1.000000M Ω          | 2 μ A                        | 0.002 + 0.001                           | 0.010 + 0.001           | 0.012 + 0.001           | 0.0010 + 0.0002  |
|                           | 10.00000M Ω          | 200nA                        | 0.015 + 0.001                           | 0.030 + 0.001           | 0.040 + 0.001           | 0.0030 + 0.0004  |
|                           | 200nA    10M Ω       |                              | 0.300 + 0.010                           | 0.800 + 0.010           | 0.800 + 0.010           | 0.1500 + 0.0002  |

NOTE: [1] Specifications are for 90-minute warm-up and 100 PLC integration time.

[2] 10% overrange on all ranges.

[3] Relative to calibration standards.

[4] Specifications are for 4-wire resistance measurement. Add 0.2 Ω additional error in 2-wire resistance measurement.



## Measuring Characteristics

| DC Voltage   |  |
|--|--|
| Input Impedance  | 200mV, 2V, 20V ranges: 10M $\Omega$ or >10G $\Omega$<br>(For these ranges, input beyond $\pm 26$ V are clamped through 106 k $\Omega$ )<br>200V and 300V ranges: 10M $\Omega$ $\pm$ 1% |
| Input Protection   | 300V   |
| Input Offset Current   | 50pA, at 25 $^{\circ}$ C, typical  |
| CMRR (common mode rejection ratio)   | 140 dB for 1 k $\Omega$ unbalanced resistance in LO lead, $\pm$ 300 VDC peak maximum.  |
| Resistance   |  |
| Measurement Method   | 4-wire or 2-wire resistance<br>Current source referenced to LO input   |
| Open-circuit Voltage   | Limited to <10 V   |
| Max. Lead Resistance (4-wire)  | 10% of range per lead for 200 $\Omega$ and 2 k $\Omega$ ranges, 1 k $\Omega$ per lead on all other ranges  |
| Input Protection   | 300V on all ranges   |
| Offset Compensation  | Available on 200 $\Omega$ , 2 k $\Omega$ and 20 k $\Omega$ ranges.   |
| DC Current   |  |
| Shunt Resistor   | 100 $\Omega$ for 200 $\mu$ A, 2 mA<br>1 $\Omega$ for 20 mA, 200 mA<br>0.01 $\Omega$ for 2 A, 10 A  |
| Auto Zero OFF Operation (typical value)  |  |
| Following instrument warm-up at the environment temperature $\pm$ 1 $^{\circ}$ C and <5 minutes, add 0.0001 % range + 2 $\mu$ V error for DCV and 2 m $\Omega$ error for resistance.                                     |  |
| Settling Considerations  |  |
| Reading settling times are affected by source impedance, cable dielectric characteristics and input signal changes. The default measurement delay can ensure the correctness of the first reading for most measurements. |  |
| Measurement Considerations   |  |
| Teflon or other high-impedance, low-dielectric absorption wire insulation is recommended for these measurements.   |  |

## AC Characteristics

Accuracy Specifications:  $\pm$  (% of reading + % of range)<sup>(1)</sup>

| Function                           | Range <sup>(2)</sup> | Frequency Range | 24 Hour <sup>(3)</sup><br>TCAL $^{\circ}$ C $\pm$ 1 $^{\circ}$ C | 90 Day<br>T <sub>CAL</sub> $^{\circ}$ C $\pm$ 5 $^{\circ}$ C | 1 Year<br>T <sub>CAL</sub> $^{\circ}$ C $\pm$ 5 $^{\circ}$ C | Temperature Coefficient<br>0 $^{\circ}$ C to (TCAL $^{\circ}$ C -5 $^{\circ}$ C )<br>(TCAL $^{\circ}$ C +5 $^{\circ}$ C ) to 50 $^{\circ}$ C |
|------------------------------------|----------------------|-----------------|--|--|--|--|
| True RMS AC Voltage <sup>(4)</sup> | 200.0000mV           | 3Hz– 5Hz        | 1.00 + 0.03  | 1.00 + 0.04  | 1.00 + 0.04  | 0.100 + 0.004  |
|                                    |                      | 5Hz–10Hz        | 0.35 + 0.03  | 0.35 + 0.04  | 0.35 + 0.04  | 0.035 + 0.004  |
|                                    |                      | 10Hz–20kHz      | 0.04 + 0.03  | 0.05 + 0.04  | 0.06 + 0.04  | 0.005 + 0.004  |
|                                    |                      | 20kHz–50kHz     | 0.10 + 0.05  | 0.11 + 0.05  | 0.12 + 0.05  | 0.011 + 0.005  |
|                                    |                      | 50kHz–100kHz    | 0.55 + 0.08  | 0.60 + 0.08  | 0.60 + 0.08  | 0.060 + 0.008  |
|                                    |                      | 100kHz– 300kHz  | 4.00 + 0.50  | 4.00 + 0.50  | 4.00 + 0.50  | 0.20 + 0.02  |
|                                    | 2.000000V            | 3Hz–5Hz         | 1.00 + 0.02  | 1.00 + 0.03  | 1.00 + 0.03  | 0.100 + 0.003  |
|                                    |                      | 5Hz–10Hz        | 0.35 + 0.02  | 0.35 + 0.03  | 0.35 + 0.03  | 0.035 + 0.003  |
|                                    |                      | 10Hz–20kHz      | 0.04 + 0.02  | 0.05 + 0.03  | 0.06 + 0.03  | 0.005 + 0.003  |
|                                    |                      | 20kHz–50kHz     | 0.10 + 0.04  | 0.11 + 0.05  | 0.12 + 0.05  | 0.011 + 0.005  |
|                                    |                      | 50kHz–100kHz    | 0.55 + 0.08  | 0.60 + 0.08  | 0.60 + 0.08  | 0.060 + 0.008  |
|                                    |                      | 100kHz–300kHz   | 4.00 + 0.50  | 4.00 + 0.50  | 4.00 + 0.50  | 0.20 + 0.02  |
| 20.00000V                          | 3Hz–5Hz              | 1.00 + 0.03     | 1.00 + 0.04  | 1.00 + 0.04  | 0.100 + 0.004  |  |
|                                    | 5Hz–10Hz             | 0.35 + 0.03     | 0.35 + 0.04  | 0.35 + 0.04  | 0.035 + 0.004  |  |
|                                    | 10Hz–20kHz           | 0.04 + 0.04     | 0.07 + 0.04  | 0.08 + 0.04  | 0.008 + 0.004  |  |
|                                    | 20kHz– 50kHz         | 0.10 + 0.05     | 0.12 + 0.05  | 0.15 + 0.05  | 0.012 + 0.005  |  |
|                                    | 50kHz–100kHz         | 0.55 + 0.08     | 0.60 + 0.08  | 0.60 + 0.08  | 0.060 + 0.008  |  |
|                                    | 100kHz–300kHz        | 4.00 + 0.50     | 4.00 + 0.50  | 4.00 + 0.50  | 0.20 + 0.02  |  |

|                                    |             |               |             |             |               |               |
|------------------------------------|-------------|---------------|-------------|-------------|---------------|---------------|
|                                    | 200.0000V   | 3Hz–5Hz       | 1.00 + 0.02 | 1.00 + 0.03 | 1.00 + 0.03   | 0.100 + 0.003 |
|                                    |             | 5Hz–10Hz      | 0.35 + 0.02 | 0.35 + 0.03 | 0.35 + 0.03   | 0.035 + 0.003 |
|                                    |             | 10Hz–20kHz    | 0.04 + 0.02 | 0.07 + 0.03 | 0.08 + 0.03   | 0.008 + 0.003 |
|                                    |             | 20kHz–50kHz   | 0.10 + 0.04 | 0.12 + 0.05 | 0.15 + 0.05   | 0.012 + 0.005 |
|                                    |             | 50kHz–100kHz  | 0.55 + 0.08 | 0.60 + 0.08 | 0.60 + 0.08   | 0.060 + 0.008 |
|                                    | 300.000V    | 100kHz–300kHz | 4.0 + 0.50  | 4.0 + 0.50  | 4.0 + 0.50    | 0.20 + 0.02   |
|                                    |             | 3Hz–5Hz       | 1.00 + 0.02 | 1.00 + 0.03 | 1.00 + 0.03   | 0.100 + 0.003 |
|                                    |             | 5Hz–10Hz      | 0.35 + 0.02 | 0.35 + 0.03 | 0.35 + 0.03   | 0.035 + 0.003 |
|                                    |             | 10Hz–20kHz    | 0.04 + 0.02 | 0.07 + 0.03 | 0.08 + 0.03   | 0.008 + 0.003 |
|                                    |             | 20kHz–50kHz   | 0.10 + 0.04 | 0.12 + 0.05 | 0.15 + 0.05   | 0.012 + 0.005 |
| True RMS AC Current <sup>[6]</sup> | 200.0000 μA | 50kHz–100kHz  | 0.55 + 0.08 | 0.60 + 0.08 | 0.60 + 0.08   | 0.060 + 0.008 |
|                                    |             | 100kHz–300kHz | 4.0 + 0.50  | 4.0 + 0.50  | 4.0 + 0.50    | 0.20 + 0.02   |
|                                    |             | 3Hz–5Hz       | 1.10 + 0.06 | 1.10 + 0.06 | 1.10 + 0.06   | 0.200 + 0.006 |
|                                    |             | 5Hz–10Hz      | 0.35 + 0.06 | 0.35 + 0.06 | 0.35 + 0.06   | 0.100 + 0.006 |
|                                    | 2.000000mA  | 10Hz–5kHz     | 0.15 + 0.06 | 0.15 + 0.06 | 0.15 + 0.06   | 0.015 + 0.006 |
|                                    |             | 5kHz–10kHz    | 0.35 + 0.70 | 0.35 + 0.70 | 0.35 + 0.70   | 0.030 + 0.006 |
|                                    |             | 3Hz–5Hz       | 1.00 + 0.04 | 1.00 + 0.04 | 1.00 + 0.04   | 0.100 + 0.006 |
|                                    |             | 5Hz–10Hz      | 0.30 + 0.04 | 0.30 + 0.04 | 0.30 + 0.04   | 0.035 + 0.006 |
|                                    | 20.00000mA  | 10Hz–5kHz     | 0.12 + 0.04 | 0.12 + 0.04 | 0.12 + 0.04   | 0.015 + 0.006 |
|                                    |             | 5kHz–10kHz    | 0.20 + 0.25 | 0.20 + 0.25 | 0.20 + 0.25   | 0.030 + 0.006 |
| 3Hz–5Hz                            |             | 1.10 + 0.06   | 1.10 + 0.06 | 1.10 + 0.06 | 0.200 + 0.006 |               |
| 5Hz–10Hz                           |             | 0.35 + 0.06   | 0.35 + 0.06 | 0.35 + 0.06 | 0.100 + 0.006 |               |
| 200.0000mA                         | 10Hz–5kHz   | 0.15 + 0.06   | 0.15 + 0.06 | 0.15 + 0.06 | 0.015 + 0.006 |               |
|                                    | 5kHz–10kHz  | 0.35 + 0.70   | 0.35 + 0.70 | 0.35 + 0.70 | 0.030 + 0.006 |               |
|                                    | 3Hz–5Hz     | 1.00 + 0.04   | 1.00 + 0.04 | 1.00 + 0.04 | 0.100 + 0.006 |               |
|                                    | 5Hz–10Hz    | 0.30 + 0.04   | 0.30 + 0.04 | 0.30 + 0.04 | 0.035 + 0.006 |               |
| 1.000000A                          | 10Hz–5kHz   | 0.10 + 0.04   | 0.10 + 0.04 | 0.10 + 0.04 | 0.015 + 0.006 |               |
|                                    | 5kHz–10kHz  | 0.20 + 0.25   | 0.20 + 0.25 | 0.20 + 0.25 | 0.030 + 0.006 |               |
|                                    | 3Hz–5Hz     | 1.10 + 0.06   | 1.10 + 0.06 | 1.10 + 0.06 | 0.100 + 0.006 |               |
|                                    | 5Hz–10Hz    | 0.35 + 0.06   | 0.35 + 0.06 | 0.35 + 0.06 | 0.035 + 0.006 |               |
|                                    | 10Hz–5kHz   | 0.15 + 0.06   | 0.15 + 0.06 | 0.15 + 0.06 | 0.015 + 0.006 |               |
|                                    |             | 5kHz–10kHz    | 0.35 + 0.70 | 0.35 + 0.70 | 0.030 + 0.006 |               |
|                                    |             | 5Hz–10Hz      | 0.35 + 0.08 | 0.35 + 0.10 | 0.035 + 0.008 |               |
|                                    |             | 10Hz–5kHz     | 0.15 + 0.08 | 0.15 + 0.10 | 0.015 + 0.008 |               |

NOTE: [1] Specifications are for 90-minute warm-up, slow ac filter and sine wave input.

[2] 10% overrange on all ranges.

[3] Relative to calibration standards.

[4] Specifications are for sine wave input >5% of range. For inputs from 1% to 5% of range and <50 kHz, add 0.1% of range additional error.

For 50 kHz to 100 kHz, add 0.13% of range.

[5] When the frequency is lower than 100 Hz, the specification of slow filter is only for sine wave input.

[6] Specifications are for sine wave input >5% of range. For inputs from 1% to 5% of range, add 0.1% of range additional error.

Specifications are typical values for 200 uA, 2 mA, 2 A and 10 A ranges when frequency is >1 kHz.

## Measuring Characteristics

|                                    |  |
|------------------------------------|--|
| True RMS AC Voltage                |  |
| Measurement Method                 | AC-coupled True-RMS -- measure the ac component of input with up to 300 V DC bias on any range.        |
| Crest Factor                       | ≤ 5 at full range  |
| Input Impedance                    | 1 MΩ ± 2%, in parallel with <150 pF capacitance on any range   |
| Input Protection                   | 300 V rms on all ranges  |
| AC Filter Bandwidth                | Slow: 3 Hz – 300 kHz<br>Medium: 20 Hz – 300 kHz<br>Fast: 200 Hz – 300 kHz                              |
| CMRR (common mode rejection ratio) | 70 dB, for the 1 kΩ unbalance in LO lead, <60 Hz common mode signal frequency, ± 500 VDC peak maximum. |
| True RMS AC Current                |  |
| Measurement Method                 | Direct coupled to the fuse and shunt; AC-coupled True RMS measurement (measure the AC component).      |
| Crest Factor                       | ≤ 3 at full range  |
| Max. Input                         | DC + AC current peak value <300% of range. Current with DC current component <10 A rms.                |
| Shunt Resistor                     | 100 Ω for 200 uA, 2 mA<br>1 Ω for 20 mA, 200 mA<br>0.01 Ω for 1 A                                      |

## Settling Time Considerations

The default measurement delay of the multimeter can ensure the correctness of the first readings of most of the measurements. Make sure the RC circuit of input terminal has been fully settled (about 1 s) before accurate measurement.

## Frequency and Period Characteristics

Accuracy Specifications:  $\pm$  (% of reading)<sup>[1][2]</sup>

| Function             | Range      | Frequency Range | 24 Hour <sup>[3]</sup><br>$T_{CAL} \text{ } ^\circ\text{C} \pm 1^\circ\text{C}$ | 90 Day<br>$T_{CAL} \text{ } ^\circ\text{C} \pm 5^\circ\text{C}$ | 1 Year<br>$T_{CAL} \text{ } ^\circ\text{C} \pm 5^\circ\text{C}$ | Temperature Coefficient<br>0°C to ( $T_{CAL} \text{ } ^\circ\text{C} - 5^\circ\text{C}$ )<br>( $T_{CAL} \text{ } ^\circ\text{C} + 5^\circ\text{C}$ ) to 50°C |
|----------------------|------------|-----------------|---|---|---|--|
| Frequency,<br>Period | 200mV–300V | 3 Hz–5 Hz       | 0.07  | 0.07  | 0.07  | 0.005  |
|                      |            | 5 Hz–10 Hz      | 0.04  | 0.04  | 0.04  | 0.005  |
|                      |            | 10 Hz–40 Hz     | 0.02  | 0.02  | 0.02  | 0.001  |
|                      |            | 40 Hz–300 kHz   | 0.005   | 0.006   | 0.007   | 0.001  |
|                      |            | 300 kHz–1 MHz   | 0.005   | 0.006   | 0.007   | 0.001  |

Additional Low Frequency Errors: (% of reading)

| Frequency    | Gate Time (Resolution) |               |                 |                   |
|--------------|------------------------|---------------|-----------------|-------------------|
|              | 1s ( 0.1ppm )          | 0.1s ( 1ppm ) | 0.01s ( 10ppm ) | 0.001s ( 100ppm ) |
| 3 Hz–5Hz     | 0                      | 0.12          | 0.12            | 0.12              |
| 5 Hz–10Hz    | 0                      | 0.17          | 0.17            | 0.17              |
| 10 Hz–40Hz   | 0                      | 0.20          | 0.20            | 0.20              |
| 40 Hz–100Hz  | 0                      | 0.06          | 0.21            | 0.21              |
| 100 Hz–300Hz | 0                      | 0.03          | 0.21            | 0.21              |
| 300 Hz–1 kHz | 0                      | 0.01          | 0.07            | 0.07              |
| >1kHz        | 0                      | 0             | 0.02            | 0.02              |

NOTE: [1] Specifications are for 90 minutes warm-up and 1 s gate time.

[2] For frequency  $\leq$  300 kHz, the specification is for AC input voltage of 10% to 110% of range. For frequency >300 kHz, the specification is for AC input voltage of 20% to 110% of range. The maximum input is limited to 750 Vrms or 8 x 107 Volts-Hz (whichever is less). 200 mV range is full range input or input that is larger than the full range.

For 20 mV to 200 mV inputs, multiply % of reading error by 10.

[3] Relative to calibration standards.

### Measuring Characteristics

| Frequency and Period   |  |
|--|--|
| Measurement Method   | Reciprocal-counting technique, AC-coupled input using the AC voltage function. |
| Input Impedance  | 1 M $\Omega$ $\pm$ 2%, in parallel with <150 pF capacitance on any range       |
| Input Protection   | 300 Vrms on all ranges   |
| Measurement Considerations   |  |
| All frequency counters are susceptible to error when measuring low-voltage, low-frequency signals. Shielding inputs from external noise pickup is critical for minimizing measurement errors.  |  |
| Settling Considerations  |  |
| Errors will occur when attempting to measure the frequency or period of an input following a dc offset voltage change. The input blocking RC time constant must be allowed to fully settle (about 1 s) before the most accurate measurements are possible. |  |

## Temperature Characteristics

Accuracy Specifications<sup>[1]</sup>

| Function    | Probe Type  | Type               | Optimum Range    | 1 Year<br>$T_{CAL} \text{ } ^\circ\text{C} \pm 5^\circ\text{C}$ | Temperature Coefficient<br>0°C to ( $T_{CAL} \text{ } ^\circ\text{C} - 5^\circ\text{C}$ )<br>( $T_{CAL} \text{ } ^\circ\text{C} + 5^\circ\text{C}$ ) to 50°C |         |
|-------------|---|--------------------|------------------|---|--|---------|
| Temperature | RTD <sup>[2]</sup> (R0 is within 49 $\Omega$ and 2.1 k $\Omega$ ) | $\alpha = 0.00385$ | -200°C – 660°C   | 0.16°C  | 0.01°C   |         |
|             |   | $\alpha = 0.00389$ | -200°C – 660°C   | 0.17°C  | 0.01°C   |         |
|             |   | $\alpha = 0.00391$ | -200°C – 660°C   | 0.14°C  | 0.01°C   |         |
|             |   | $\alpha = 0.00392$ | -200°C – 660°C   | 0.15°C  | 0.01°C   |         |
|             | Thermal Resistance  | 2.2 k $\Omega$     |                  | -40°C – 150°C   | 0.08°C   | 0.002°C |
|             |   | 3 k $\Omega$       |                  | -40°C – 150°C   | 0.08°C   | 0.002°C |
|             |   | 5 k $\Omega$       |                  | -40°C – 150°C   | 0.08°C   | 0.002°C |
|             |   | 10 k $\Omega$      |                  | -40°C – 150°C   | 0.08°C   | 0.002°C |
|             |   | 30 k $\Omega$      |                  | -40°C – 150°C   | 0.08°C   | 0.002°C |
|             | Thermocouple <sup>[3]</sup>                                       | B                  |                  | 0°C – 1820°C  | 0.76°C   | 0.14°C  |
|             |   | E                  |                  | -270°C – 1000°C   | 0.5°C  | 0.02°C  |
|             |   | J                  |                  | -210°C – 1200°C   | 0.5°C  | 0.02°C  |
|             |   | K                  |                  | -270°C – 1372°C   | 0.5°C  | 0.03°C  |
|             |   | N                  |                  | -270°C – 1300°C   | 0.5°C  | 0.04°C  |
| R           |   |                    | -50°C – 1768.1°C | 0.5°C   | 0.09°C   |         |
| S           |   |                    | -50°C – 1768.1°C | 0.6°C   | 0.11°C   |         |
| T           |   | -270°C – 400°C     | 0.5°C            | 0.03°C  |  |         |

NOTE: [1] Specifications are for 90 minutes warm-up. Probe error excluded.

[2] Specification is for 4WR resistance measurement.

[3] Relative to cold junction temperature, accuracy is based on ITS-90. Built-in cold junction temperature refers to the temperature of the connector inside the terminal block and its accuracy is  $\pm 2.5^\circ\text{C}$ .

## Measuring Characteristics

|                         |  |
|-------------------------|--|
| Thermocouple            |  |
| Conversion              | ITS-90 software compensation   |
| Reference Junction Type | Internal, Fixed, or External   |
| T/C Check               | Selectable per channel. When the channel resistance is $>5k\Omega$ , it is considered as Open.                                     |
| RTD                     |  |
| Alpha                   | = 0.00385 (DIN/IEC 751): using ITS-90 software compensation;<br>= 0.00389, 0.00391 or 0.00392: using IPTS-68 software compensation |
| Thermistor              |  |
|                         | 44004, 44007, 44006 series   |

## Measurement Considerations

The built-in cold junction temperature tracks the temperature inside the terminal box. The change of temperature in the terminal box might cause additional error. When using the built-in cold junction compensation, connect the sensor terminal of the thermocouple to the terminal box and warm it up for more than 3 minutes to minimize the error.

## Module Specifications

MC3120/MC3132/MC3164/MC3324/MC3416/MC3648

| General   | Multiplexer     |                 |                      |                      | Actuator        | Matrix          |
|---|-----------------|-----------------|----------------------|----------------------|-----------------|-----------------|
|   | MC3120          | MC3132          | MC3164               | MC3324               | MC3416          | MC3648          |
| Number of Channels                                | 20              | 32              | 64                   | 20 Voltage+4 Current | 16              | 4 x 8           |
| Connect to DMM Module?                            | Yes             | Yes             | Yes                  | Yes                  | No              | No              |
| Scanning Speed <sup>[4]</sup>                     | 60Ch/s          | 60Ch/s          | 60Ch/s               | 60Ch/s               | —               | —               |
| Open/Close Speed                                  | 200Ch/s         | 200Ch/s         | 200Ch/s              | 200Ch/s              | 200Ch/s         | 200Ch/s         |
| Maximum Input                                     |                 |                 |                      |                      |                 |                 |
| Voltage (DC, AC rms)                              | 300Vrms         | 300Vrms         | 300Vrms              | 300Vrms              | 300Vrms         | 300Vrms         |
| Current (DC, AC rms)                              | 1Arms           | 1Arms           | 1Arms                | 1Arms                | 2Arms           | 1Arms           |
| Power (W, VA)                                     | 50VA            | 50VA            | 50VA                 | 50VA                 | 60VA            | 50VA            |
| Isolation (ch-ch, ch-earth) (DC, AC rms)          | 300Vrms         | 300Vrms         | 300Vrms              | 300Vrms              | 300Vrms         | 300Vrms         |
| DC Characteristics                                |                 |                 |                      |                      |                 |                 |
| Offset Voltage                                    | 5uV             | 5uV             | 5uV                  | 5uV                  | <3uV            | 5uV             |
| Initial Closed Channel Resistance                 | <1 $\Omega$     | <1 $\Omega$     | <1 $\Omega$          | <1 $\Omega$          | <0.1 $\Omega$   | <1 $\Omega$     |
| Isolation (ch-ch, ch-earth)                       | >10G $\Omega$   | >10G $\Omega$   | >10G $\Omega$        | >10G $\Omega$        | >10G $\Omega$   | >10G $\Omega$   |
| AC Characteristics                                |                 |                 |                      |                      |                 |                 |
| Bandwidth   | 1MHz            | 1MHz            | 1MHz                 | 1MHz                 | 1MHz            | 1MHz            |
| Ch-Ch Cross Talk (dB) <sup>[5]</sup> 1MHz         | -45             | -45             | -18 <sup>[6]</sup>   | -45                  | -15             | -18             |
| Capacitance HI-LO                                 | 100pF           | 100pF           | 100pF                | 100pF                | <500pF          | 100pF           |
| Capacitance LO-Earth                              | 200pF           | 200pF           | 200pF                | 200pF                | <200pF          | 200pF           |
| Volt-Hertz Limit                                  | 10 <sup>8</sup> | 10 <sup>8</sup> | 10 <sup>8</sup>      | 10 <sup>8</sup>      | 10 <sup>8</sup> | 10 <sup>8</sup> |
| Other   |                 |                 |                      |                      |                 |                 |
| T/C Cold Junction Accuracy (Typical)              | 0.8°C           | 0.8°C           | 0.8°C <sup>[7]</sup> | 0.8°C                | —               | —               |
| Switch Life (No Load) (Typical)                   | 100M            | 100M            | 100M                 | 100M                 | 100M            | 100M            |
| Switch Life (Rated Load) (Typical) <sup>[8]</sup> | 100K            | 100K            | 100K                 | 100K                 | 100K            | 100K            |
| Operating Temperature                             | 0°C - 55°C      | 0°C - 55°C      | 0°C - 55°C           | 0°C - 55°C           | 0°C - 55°C      | 0°C - 55°C      |
| Storage Temperature                               | -20°C - 70°C    | -20°C - 70°C    | -20°C - 70°C         | -20°C - 70°C         | -20°C - 70°C    | -20°C - 70°C    |
| Humidity (non-condensing)                         | 40°C / 80% RH   | 40°C / 80% RH   | 40°C / 80% RH        | 40°C / 80% RH        | 40°C / 80% RH   | 40°C / 80% RH   |

NOTE: [1] 20 channel multiplexer can be used as 20 2-wire or 10 4-wire measurement channels and 32 channel multiplexer can be used as 32 2-wire or 16 4-wire measurement channels.

[2] 64 channel multiplexer share a Common Low for two banks of 32 channels.

[3] 24 Channel multiplexer can be configured as 20 2-wire voltage channels or 10 4-wire voltage channels in addition to the 4 current channels.

[4] Integration time: 0.02PLC, channel delay: 0, auto zero: off, alarm: off, scaling: off, display: off, data to internal memory.

[5] 50  $\Omega$  load.

[6] Isolation within banks is -40dB.

[7] Specifications are for the LO setting and not the temperature of the cold terminal.

[8] Applies to resistive loads only.

## MC3534

| Digital Input/Output (DIO)  |   |                |  |                              |                                       |
|-----------------------------|---|----------------|--|------------------------------|---------------------------------------|
| Port 1,2,3,4                | 8-bit, input or output, non-isolated              |                |  |                              |                                       |
| Type                        | Vin(L)  | Vin(H)         | Vout(L)  | Vout(H)                      | Vin(H) Max                            |
| TTL                         | <0.8V   | >2.0V          | <0.2V@ $I_{out}=-500mA$                            | >4.8V@ $I_{out}=1mA$         | <42V with external open drain pull-up |
| 5V CMOS                     | <1.5V   | >3.5V          | <0.2V@ $I_{out}=-500mA$                            | >4.8V@ $I_{out}=1mA$         |                                       |
| 3.3V CMOS                   | <1.0V   | >2.3V          | <0.2V@ $I_{out}=-500mA$                            | >3.15V@ $I_{out}=1mA$        |                                       |
| 2.5V CMOS                   | <0.75V  | >1.75V         | <0.2V@ $I_{out}=-500mA$                            | >2.35V@ $I_{out}=1mA$        |                                       |
| User defined                | Threshold-0.3V                                    | Threshold+0.3V | <0.2V@ $I_{out}=-500mA$                            | >(Level-0.2V)@ $I_{out}=1mA$ |                                       |
| Alarming                    | Match or mismatch, maskable                       |                |  |                              | Match or mismatch, maskable           |
| Speed                       | 4ms (Max) alarm sampling                          |                |  |                              | 4ms (Max) alarm sampling              |
| Latency                     | 5ms   |                |  |                              | 5ms                                   |
| Read/Write Speed            | 100/s   |                |  |                              | 100/s                                 |
| Totalizer Input (TOT)       |   |                |  |                              |                                       |
|                             | High Speed (TOT1,TOT2)                            |                | Normal Speed (TOT3,TOT4)                           |                              |                                       |
| Maximum Count               | $2^{32}-1$  |                | $2^{32}-1$   |                              |                                       |
| Totalizer Input             | 10MHz (max), rising or falling edge, programmable |                | 100kHz (max), rising or falling edge, programmable |                              |                                       |
| Signal Level                | CMOS 3.3V,5V tolerable                            |                | 1Vp-p(min),42Vpk(max), $V_{cm}=-12V\sim+12V$       |                              |                                       |
| Threshold                   | Fixed at CMOS 3.3V                                |                | -12V~+12V, Programmable                            |                              |                                       |
| Gated Input                 | CMOS 3.3V-Hi, CMOS 3.3V-Lo or none, 5V tolerance  |                | CMOS 3.3V-Hi, CMOS 3.3V-Lo or none, 5V tolerance   |                              |                                       |
| Count Reset                 | Manual or Read + Reset                            |                | 100/s  |                              |                                       |
| Read Speed                  | 100/s   |                |  |                              |                                       |
| Analog Voltage Output (DAC) |   |                |  |                              |                                       |
| DAC 1,2,3,4                 | $\pm 12V$ , non-isolated (earth referenced)       |                |  |                              |                                       |
| Resolution                  | 1mV   |                |  |                              |                                       |
| Iout                        | 10mA max  |                |  |                              |                                       |
| Setting Time                | 1ms to 0.01 % of output                           |                |  |                              |                                       |
| Accuracy                    | $\pm$ ( % of output + mV)                         |                |  |                              |                                       |
| 1 year $\pm 5^{\circ}C$     | 0.25%+20mV  |                |  |                              |                                       |
| Temp Coefficient            | $\pm$ (0.015%+1mV)/ $^{\circ}C$                   |                |  |                              |                                       |

## General Specifications

|                      |   |
|----------------------|---|
| Display              | 4.3 inches  |
| Power Supply         | AC 100V – 120V, 45Hz – 440Hz<br>AC 200V – 240V, 45Hz – 66Hz<br>Detect the power frequency automatically at power-on, 400 Hz defaults to 50 Hz |
| Power Consumption    | 25 VA Max   |
| Working Environment  | Full accuracy for 0 $^{\circ}C$ to 50 $^{\circ}C$<br>Full accuracy to 80% R.H. at 40 $^{\circ}C$ Non-coagulation                              |
| Storage Temperature  | -40 $^{\circ}C$ to 70 $^{\circ}C$   |
| Operation Altitude   | Up to 2000 meters   |
| Safety               | IEC 61010-1; EN 61010-1; UL 61010-1; CAN/CSA-C22.2 No. 61010-1<br>Measurement CAT I 1000V/CAT II 300V<br>Pollution Degree 2                   |
| EMC                  | EN 61326-1  |
| Weight               | About 5.7 kg (without package)  |
| Dimension            | (height $\times$ width $\times$ length): 159.0mm $\times$ 239.0mm $\times$ 373.4mm  |
| Remote Interface     | GPIO, 10/100Mbit LAN, USB 2.0 Full Speed Device & Host (support USB storage device), RS-232   |
| Programming Language | SCPI  |
| LXI Compatibility    | LXI Core Device 2011, Version 1.4   |
| Warm-up Time         | 90 minutes  |

## ► Ordering Information

|                                       | Description   | Ordering No.        |
|---------------------------------------|---|---------------------|
| Mainframe                             | Data Acquisition/Switch System  | M300                |
|                                       | Data Acquisition/Switch System + DMM Module                                   | M301                |
|                                       | Data Acquisition/Switch System + DMM Module+MC3120<br>20-channel Multiplexer  | M302                |
| Standard Accessories                  | Power Cord conforming to the standard of the country                          | –                   |
|                                       | USB Cable   | CB-USBA-USBB-FF-150 |
|                                       | Mixed-interface Separator Line  | MIX-SEPARATOR       |
|                                       | M300 Series standard control and data analysis PC Software                    | Ultra Acquire       |
|                                       | Four Spare Fuses:<br>2 AC, 250 V, T3.15 A fuses<br>2 AC, 250 V, T250 mA fuses | –                   |
|                                       | Quick Guide   | –                   |
|                                       | Resource CD (User's Guide and Ultra Acquire Software)                         | –                   |
| Optional Accessories: Module          | DMM Module (6½ digits)  | MC3065              |
|                                       | 20-channel Multiplexer  | MC3120              |
|                                       | 32-channel Multiplexer  | MC3132              |
|                                       | 64-channel Single-ended Multiplexer   | MC3164              |
|                                       | 20-voltage-channel+4-current-channel Mixed Multiplexer                        | MC3324              |
|                                       | 16-channel Actuator   | MC3416              |
|                                       | Multifunction Module  | MC3534              |
|                                       | 4 × 8 Matrix Switch   | MC3648              |
| Optional Accessories:<br>Terminal Box | MC3120 Terminal Box   | M3TB20              |
|                                       | MC3132 Terminal Box   | M3TB32              |
|                                       | MC3164 Terminal Box   | M3TB64              |
|                                       | MC3324 Terminal Box   | M3TB24              |
|                                       | MC3648 Terminal Box   | M3TB48              |
|                                       | MC3534 Terminal Box   | M3TB34              |
|                                       | MC3416 Terminal Box   | M3TB16              |
| Optional Accessories                  | RS232 Cable   | –                   |
|                                       | External Port for Analog Bus Interface  | A-BUS-EXT-PORT      |
|                                       | Rack Mount Kit  | RM-1-M300           |
|                                       | Rack Mount Kit for Two Instruments  | RM-2-M300           |
|                                       | M300 Series control and advanced data analysis PC Software                    | Ultra Acquire Pro   |

# Chapter 6 Specifications

## DC Characteristics

Accuracy Specifications:  $\pm$  (% of reading + % of range) <sup>[1]</sup>

| Function                  | Range <sup>[2]</sup> | Test Current or Load Voltage | 24 Hour <sup>[3]</sup><br>T <sub>CAL</sub> °C $\pm$ 1°C | 90 Day<br>T <sub>CAL</sub> °C $\pm$ 5°C | 1 Year<br>T <sub>CAL</sub> °C $\pm$ 5°C | Temperature Coefficient<br>0°C to (T <sub>CAL</sub> °C -5°C)<br>(T <sub>CAL</sub> °C +5°C) to 50°C |
|---------------------------|----------------------|------------------------------|---|---|---|--|
| DC Voltage                | 200.0000mV           | -                            | 0.0020 + 0.0020   | 0.0030 + 0.0025                         | 0.0040 + 0.0025                         | 0.0005 + 0.0005  |
|                           | 2.000000V            | -                            | 0.0015 + 0.0005   | 0.0020 + 0.0006                         | 0.0035 + 0.0006                         | 0.0005 + 0.0001  |
|                           | 20.00000V            | -                            | 0.0020 + 0.0004   | 0.0030 + 0.0005                         | 0.0040 + 0.0005                         | 0.0005 + 0.0001  |
|                           | 200.0000V            | -                            | 0.0020 + 0.0006   | 0.0040 + 0.0006                         | 0.0050 + 0.0006                         | 0.0005 + 0.0001  |
|                           | 300.000V             | -                            | 0.0020 + 0.0006   | 0.0040 + 0.0010                         | 0.0055 + 0.0010                         | 0.0005 + 0.0001  |
| DC Current                | 200.0000μA           | <0.03V                       | 0.010 + 0.012   | 0.040 + 0.015                           | 0.050 + 0.015                           | 0.0020 + 0.0030  |
|                           | 2.000000mA           | <0.25V                       | 0.007 + 0.003   | 0.030 + 0.003                           | 0.050 + 0.003                           | 0.0020 + 0.0005  |
|                           | 20.00000mA           | <0.07V                       | 0.007 + 0.012   | 0.030 + 0.015                           | 0.050 + 0.015                           | 0.0020 + 0.0020  |
|                           | 200.0000mA           | <0.7V                        | 0.010 + 0.002   | 0.030 + 0.003                           | 0.050 + 0.003                           | 0.0020 + 0.0005  |
|                           | 1.000000A            | <0.12V                       | 0.050 + 0.020   | 0.080 + 0.020                           | 0.100 + 0.020                           | 0.0050 + 0.0010  |
| Resistance <sup>[4]</sup> | 200.0000Ω            | 1mA                          | 0.0030 + 0.0030   | 0.008 + 0.004                           | 0.010 + 0.004                           | 0.0006 + 0.0005  |
|                           | 2.000000kΩ           | 1mA                          | 0.0020 + 0.0005   | 0.008 + 0.001                           | 0.010 + 0.001                           | 0.0006 + 0.0001  |
|                           | 20.00000kΩ           | 100μA                        | 0.0020 + 0.0005   | 0.008 + 0.001                           | 0.010 + 0.001                           | 0.0006 + 0.0001  |
|                           | 200.0000kΩ           | 10μA                         | 0.0020 + 0.0005   | 0.008 + 0.001                           | 0.010 + 0.001                           | 0.0006 + 0.0001  |
|                           | 1.000000MΩ           | 2μA                          | 0.002 + 0.001   | 0.010 + 0.001                           | 0.012 + 0.001                           | 0.0010 + 0.0002  |
|                           | 10.00000MΩ           | 200nA                        | 0.015 + 0.001   | 0.030 + 0.001                           | 0.040 + 0.001                           | 0.0030 + 0.0004  |
|                           | 100.0000MΩ           | 200nA    10MΩ                | 0.300 + 0.010   | 0.800 + 0.010                           | 0.800 + 0.010                           | 0.1500 + 0.0002  |

[1] Specifications are for 90-minute warm-up and 100 PLC integration time.

[2] 10% overrange on all ranges.

[3] Relative to calibration standards.

[4] Specifications are for 4-wire resistance measurement. Add 3 Ω additional error in 2-wire resistance measurement.

**Measuring Characteristics**

| <b>DC Voltage</b>  |  |
|--|--|
| <b>Input Impedance</b>   | 200mV, 2V, 20V ranges: 10M $\Omega$ or >10G $\Omega$<br>(For these ranges, input beyond $\pm 26$ V are clamped through 106 k $\Omega$ )<br>200V and 300V ranges: 10M $\Omega$ $\pm$ 1% |
| <b>Input Protection</b>  | 300V   |
| <b>Input Offset Current</b>  | 50pA, at 25 $^{\circ}$ C, typical  |
| <b>CMRR (common mode rejection ratio)</b>  | 140 dB for 1 k $\Omega$ unbalanced resistance in LO lead, $\pm 300$ VDC peak maximum.  |
| <b>Resistance</b>  |  |
| <b>Measurement Method</b>  | 4-wire or 2-wire resistance<br>Current source referenced to LO input   |
| <b>Open-circuit Voltage</b>  | Limited to <10 V   |
| <b>Max. Lead Resistance (4-wire)</b>   | 10% of range per lead for 200 $\Omega$ and 2 k $\Omega$ ranges, 1 k $\Omega$ per lead on all other ranges  |
| <b>Input Protection</b>  | 300V on all ranges   |
| <b>Offset Compensation</b>   | Available on 200 $\Omega$ , 2 k $\Omega$ and 20 k $\Omega$ ranges.   |
| <b>DC Current</b>  |  |
| <b>Shunt Resistor</b>  | 100 $\Omega$ for 200 $\mu$ A, 2 mA<br>1 $\Omega$ for 20 mA, 200 mA<br>0.01 $\Omega$ for 2 A, 10 A  |
| <b>Auto Zero OFF Operation (typical value)</b>   |  |
| Following instrument warm-up at the environment temperature $\pm 1^{\circ}$ C and <5 minutes, add 0.0001 % range + 2 $\mu$ V error for DCV and 2 m $\Omega$ error for resistance.  |  |
| <b>Settling Considerations</b>   |  |
| Reading settling times are affected by source impedance, cable dielectric characteristics and input signal changes. The default measurement delay can ensure the correctness of the first reading for most measurements. |  |
| <b>Measurement Considerations</b>  |  |
| Teflon or other high-impedance, low-dielectric absorption wire insulation is recommended for these measurements.   |  |



## AC Characteristics

Accuracy Specifications:  $\pm$  (% of reading + % of range) <sup>[1]</sup>

| Function                                     | Range <sup>[2]</sup> | Frequency Range | 24 Hour <sup>[3]</sup><br>T <sub>CAL</sub> °C $\pm$ 1°C | 90 Day<br>T <sub>CAL</sub> °C $\pm$ 5°C | 1 Year<br>T <sub>CAL</sub> °C $\pm$ 5°C | Temperature Coefficient<br>0°C to (T <sub>CAL</sub> °C-5°C)<br>(T <sub>CAL</sub> °C+5°C) to 50°C |
|--|----------------------|-----------------|---|---|---|--|
| <b>True RMS AC Voltage</b><br><sup>[4]</sup> | 200.0000mV           | 3Hz- 5Hz        | 1.00 + 0.03   | 1.00 + 0.04                             | 1.00 + 0.04                             | 0.100 + 0.004  |
|  |                      | 5Hz-10Hz        | 0.35 + 0.03   | 0.35 + 0.04                             | 0.35 + 0.04                             | 0.035 + 0.004  |
|  |                      | 10Hz-20kHz      | 0.04 + 0.03   | 0.05 + 0.04                             | 0.06 + 0.04                             | 0.005 + 0.004  |
|  |                      | 20kHz-50kHz     | 0.10 + 0.05   | 0.11 + 0.05                             | 0.12 + 0.05                             | 0.011 + 0.005  |
|  |                      | 50kHz-100kHz    | 0.55 + 0.08   | 0.60 + 0.08                             | 0.60 + 0.08                             | 0.060 + 0.008  |
|  |                      | 100kHz- 300kHz  | 4.00 + 0.50   | 4.00 + 0.50                             | 4.00 + 0.50                             | 0.20 + 0.02  |
|  | 2.000000V            | 3Hz-5Hz         | 1.00 + 0.02   | 1.00 + 0.03                             | 1.00 + 0.03                             | 0.100 + 0.003  |
|  |                      | 5Hz-10Hz        | 0.35 + 0.02   | 0.35 + 0.03                             | 0.35 + 0.03                             | 0.035 + 0.003  |
|  |                      | 10Hz-20kHz      | 0.04 + 0.02   | 0.05 + 0.03                             | 0.06 + 0.03                             | 0.005 + 0.003  |
|  |                      | 20kHz-50kHz     | 0.10 + 0.04   | 0.11 + 0.05                             | 0.12 + 0.05                             | 0.011 + 0.005  |
|  |                      | 50kHz-100kHz    | 0.55 + 0.08   | 0.60 + 0.08                             | 0.60 + 0.08                             | 0.060 + 0.008  |
|  |                      | 100kHz-300kHz   | 4.00 + 0.50   | 4.00 + 0.50                             | 4.00 + 0.50                             | 0.20 + 0.02  |
|  | 20.00000V            | 3Hz-5Hz         | 1.00 + 0.03   | 1.00 + 0.04                             | 1.00 + 0.04                             | 0.100 + 0.004  |
|  |                      | 5Hz-10Hz        | 0.35 + 0.03   | 0.35 + 0.04                             | 0.35 + 0.04                             | 0.035 + 0.004  |
|  |                      | 10Hz-20kHz      | 0.04 + 0.04   | 0.07 + 0.04                             | 0.08 + 0.04                             | 0.008 + 0.004  |
|  |                      | 20kHz- 50kHz    | 0.10 + 0.05   | 0.12 + 0.05                             | 0.15 + 0.05                             | 0.012 + 0.005  |
|  |                      | 50kHz-100kHz    | 0.55 + 0.08   | 0.60 + 0.08                             | 0.60 + 0.08                             | 0.060 + 0.008  |
|  |                      | 100kHz-300kHz   | 4.00 + 0.50   | 4.00 + 0.50                             | 4.00 + 0.50                             | 0.20 + 0.02  |
|  | 200.0000V            | 3Hz-5Hz         | 1.00 + 0.02   | 1.00 + 0.03                             | 1.00 + 0.03                             | 0.100 + 0.003  |
|  |                      | 5Hz-10Hz        | 0.35 + 0.02   | 0.35 + 0.03                             | 0.35 + 0.03                             | 0.035 + 0.003  |
|  |                      | 10Hz-20kHz      | 0.04 + 0.02   | 0.07 + 0.03                             | 0.08 + 0.03                             | 0.008 + 0.003  |
|  |                      | 20kHz-50kHz     | 0.10 + 0.04   | 0.12 + 0.05                             | 0.15 + 0.05                             | 0.012 + 0.005  |
|  |                      | 50kHz-100kHz    | 0.55 + 0.08   | 0.60 + 0.08                             | 0.60 + 0.08                             | 0.060 + 0.008  |
|  |                      | 100kHz-300kHz   | 4.0 + 0.50  | 4.0 + 0.50                              | 4.0 + 0.50                              | 0.20 + 0.02  |
| 300.000V                                     | 3Hz-5Hz              | 1.00 + 0.02     | 1.00 + 0.03   | 1.00 + 0.03                             | 0.100 + 0.003                           |  |

|                                   |            |               |             |             |               |               |
|-----------------------------------|------------|---------------|-------------|-------------|---------------|---------------|
|                                   |            | 5Hz-10Hz      | 0.35 + 0.02 | 0.35 + 0.03 | 0.35 + 0.03   | 0.035 + 0.003 |
|                                   |            | 10Hz-20kHz    | 0.04 + 0.02 | 0.07 + 0.03 | 0.08 + 0.03   | 0.008 + 0.003 |
|                                   |            | 20kHz-50kHz   | 0.10 + 0.04 | 0.12 + 0.05 | 0.15 + 0.05   | 0.012 + 0.005 |
|                                   |            | 50kHz-100kHz  | 0.55 + 0.08 | 0.60 + 0.08 | 0.60 + 0.08   | 0.060 + 0.008 |
|                                   |            | 100kHz-300kHz | 4.0 + 0.50  | 4.0 + 0.50  | 4.0 + 0.50    | 0.20 + 0.02   |
| <b>True RMS AC Current</b><br>[8] | 200.0000μA | 3Hz-5Hz       | 1.10 + 0.06 | 1.10 + 0.06 | 1.10 + 0.06   | 0.200 + 0.006 |
|                                   |            | 5Hz-10Hz      | 0.35 + 0.06 | 0.35 + 0.06 | 0.35 + 0.06   | 0.100 + 0.006 |
|                                   |            | 10Hz-5kHz     | 0.15 + 0.06 | 0.15 + 0.06 | 0.15 + 0.06   | 0.015 + 0.006 |
|                                   |            | 5kHz-10kHz    | 0.35 + 0.70 | 0.35 + 0.70 | 0.35 + 0.70   | 0.030 + 0.006 |
|                                   | 2.000000mA | 3Hz-5Hz       | 1.00 + 0.04 | 1.00 + 0.04 | 1.00 + 0.04   | 0.100 + 0.006 |
|                                   |            | 5Hz-10Hz      | 0.30 + 0.04 | 0.30 + 0.04 | 0.30 + 0.04   | 0.035 + 0.006 |
|                                   |            | 10Hz-5kHz     | 0.12 + 0.04 | 0.12 + 0.04 | 0.12 + 0.04   | 0.015 + 0.006 |
|                                   |            | 5kHz-10kHz    | 0.20 + 0.25 | 0.20 + 0.25 | 0.20 + 0.25   | 0.030 + 0.006 |
|                                   | 20.00000mA | 3Hz-5Hz       | 1.10 + 0.06 | 1.10 + 0.06 | 1.10 + 0.06   | 0.200 + 0.006 |
|                                   |            | 5Hz-10Hz      | 0.35 + 0.06 | 0.35 + 0.06 | 0.35 + 0.06   | 0.100 + 0.006 |
|                                   |            | 10Hz-5kHz     | 0.15 + 0.06 | 0.15 + 0.06 | 0.15 + 0.06   | 0.015 + 0.006 |
|                                   |            | 5kHz-10kHz    | 0.35 + 0.70 | 0.35 + 0.70 | 0.35 + 0.70   | 0.030 + 0.006 |
|                                   | 200.0000mA | 3Hz-5Hz       | 1.00 + 0.04 | 1.00 + 0.04 | 1.00 + 0.04   | 0.100 + 0.006 |
|                                   |            | 5Hz-10Hz      | 0.30 + 0.04 | 0.30 + 0.04 | 0.30 + 0.04   | 0.035 + 0.006 |
|                                   |            | 10Hz-5kHz     | 0.10 + 0.04 | 0.10 + 0.04 | 0.10 + 0.04   | 0.015 + 0.006 |
|                                   |            | 5kHz-10kHz    | 0.20 + 0.25 | 0.20 + 0.25 | 0.20 + 0.25   | 0.030 + 0.006 |
|                                   | 1.000000A  | 3Hz-5Hz       | 1.10 + 0.06 | 1.10 + 0.06 | 1.10 + 0.06   | 0.100 + 0.006 |
|                                   |            | 5Hz-10Hz      | 0.35 + 0.06 | 0.35 + 0.06 | 0.35 + 0.06   | 0.035 + 0.006 |
|                                   |            | 10Hz-5kHz     | 0.15 + 0.06 | 0.15 + 0.06 | 0.15 + 0.06   | 0.015 + 0.006 |
|                                   |            | 5kHz-10kHz    | 0.35 + 0.70 | 0.35 + 0.70 | 0.35 + 0.70   | 0.030 + 0.006 |
|                                   |            | 5Hz-10Hz      | 0.35 + 0.08 | 0.35 + 0.10 | 0.35 + 0.10   | 0.035 + 0.008 |
| 10Hz-5kHz                         |            | 0.15 + 0.08   | 0.15 + 0.10 | 0.15 + 0.10 | 0.015 + 0.008 |               |

[1] Specifications are for 90-minute warm-up, slow ac filter and sine wave input.

[2] 10% overrange on all ranges.

[3] Relative to calibration standards.

[4] Specifications are for sine wave input >5% of range. For inputs from 1% to 5% of range and <50 kHz, add 0.1% of range additional error. For

50 kHz to 100 kHz, add 0.13% of range.

- [5] When the frequency is lower than 100 Hz, the specification of slow filter is only for sine wave input.
- [6] Specifications are for sine wave input >5% of range. For inputs from 1% to 5% of range, add 0.1% of range additional error. Specifications are typical values for 200  $\mu$ A, 2 mA, 2 A and 10 A ranges when frequency is >1 kHz.

### Measuring Characteristics

| <b>True RMS AC Voltage</b>   |   |
|--|---|
| <b>Measurement Method</b>  | AC-coupled True-RMS -- measure the ac component of input with up to 300 V DC bias on any range.                 |
| <b>Crest Factor</b>  | $\leq 5$ at full range  |
| <b>Input Impedance</b>   | 1 M $\Omega$ $\pm$ 2%, in parallel with <150 pF capacitance on any range  |
| <b>Input Protection</b>  | 300 Vrms on all ranges  |
| <b>AC Filter Bandwidth</b>   | Slow: 3 Hz – 300 kHz  |
|  | Medium: 20 Hz – 300 kHz   |
|  | Fast: 200 Hz – 300 kHz  |
| <b>CMRR (common mode rejection ratio)</b>  | 70 dB, for the 1 k $\Omega$ unbalance in LO lead, <60 Hz common mode signal frequency, $\pm$ 300 Vpeak maximum. |
| <b>True RMS AC Current</b>   |   |
| <b>Measurement Method</b>  | Direct coupled to the fuse and shunt; AC-coupled True RMS measurement (measure the AC component).               |
| <b>Crest Factor</b>  | $\leq 3$ at full range  |
| <b>Max. Input</b>  | DC + AC current peak value <300% of range. Current with DC current component <1 Arms.                           |
| <b>Shunt Resistor</b>  | 100 $\Omega$ for 200 $\mu$ A, 2 mA  |
|  | 1 $\Omega$ for 20 mA, 200 mA  |
|  | 0.01 $\Omega$ for 1 A   |
| <b>Settling Time Considerations</b>  |   |
| The default measurement delay of the multimeter can ensure the correctness of the first readings of most of the measurements. Make sure the RC circuit of input terminal has been fully settled (about 1 s) before accurate measurement. |   |

## Frequency and Period Characteristics

Accuracy Specifications:  $\pm$  (% of reading) <sup>[1] [2]</sup>

| Function             | Range            | Frequency Range | 24 Hour <sup>[3]</sup><br>$T_{CAL} \text{ } ^\circ\text{C} \pm 1 \text{ } ^\circ\text{C}$ | 90 Day<br>$T_{CAL} \text{ } ^\circ\text{C} \pm 5 \text{ } ^\circ\text{C}$ | 1 Year<br>$T_{CAL} \text{ } ^\circ\text{C} \pm 5 \text{ } ^\circ\text{C}$ | Temperature Coefficient<br>0°C to ( $T_{CAL} \text{ } ^\circ\text{C} - 5 \text{ } ^\circ\text{C}$ )<br>( $T_{CAL} \text{ } ^\circ\text{C} + 5 \text{ } ^\circ\text{C}$ ) to 50°C |
|----------------------|------------------|-----------------|---|---|---|--|
| Frequency,<br>Period | 200mV to<br>300V | 3 Hz-5 Hz       | 0.07  | 0.07  | 0.07  | 0.005  |
|                      |                  | 5 Hz-10 Hz      | 0.04  | 0.04  | 0.04  | 0.005  |
|                      |                  | 10 Hz-40 Hz     | 0.02  | 0.02  | 0.02  | 0.001  |
|                      |                  | 40 Hz-300 kHz   | 0.005   | 0.006   | 0.007   | 0.001  |
|                      |                  | 300 kHz-1 MHz   | 0.005   | 0.006   | 0.007   | 0.001  |

Additional Low Frequency Errors: (% of reading)

| Frequency    | Gate Time (Resolution) |               |                 |                   |
|--------------|------------------------|---------------|-----------------|-------------------|
|              | 1 s (0.1 ppm)          | 0.1 s (1 ppm) | 0.01 s (10 ppm) | 0.001 s (100 ppm) |
| 3 Hz-5Hz     | 0                      | 0.12          | 0.12            | 0.12              |
| 5 Hz-10Hz    | 0                      | 0.17          | 0.17            | 0.17              |
| 10 Hz-40Hz   | 0                      | 0.20          | 0.20            | 0.20              |
| 40 Hz-100Hz  | 0                      | 0.06          | 0.21            | 0.21              |
| 100 Hz-300Hz | 0                      | 0.03          | 0.21            | 0.21              |
| 300 Hz-1 kHz | 0                      | 0.01          | 0.07            | 0.07              |
| >1kHz        | 0                      | 0             | 0.02            | 0.02              |

[1] Specifications are for 90 minutes warm-up and 1 s gate time.

[2] For frequency  $\leq 300$  kHz, the specification is for AC input voltage of 10% to 110% of range. For frequency  $> 300$  kHz, the specification is for AC input voltage of 20% to 110% of range. The maximum input is limited to 750 Vrms or  $8 \times 10^7$  Volts-Hz (whichever is less). 200 mV range is full range input or input that is larger than the full range. For 20 mV to 200 mV inputs, multiply % of reading error by 10.

[3] Relative to calibration standards.

**Measuring Characteristics****Frequency and Period**

|                    |  |
|--------------------|--|
| Measurement Method | Reciprocal-counting technique, AC-coupled input using the AC voltage function. |
| Input Impedance    | 1 M $\Omega$ $\pm$ 2%, in parallel with <150 pF capacitance on any range       |
| Input Protection   | 300 Vrms on all ranges   |

**Measurement Considerations**

All frequency counters are susceptible to error when measuring low-voltage, low-frequency signals. Shielding inputs from external noise pickup is critical for minimizing measurement errors.

**Settling Considerations**

Errors will occur when attempting to measure the frequency or period of an input following a dc offset voltage change. The input blocking RC time constant must be allowed to fully settle (about 1 s) before the most accurate measurements are possible.

## Temperature Characteristics

| Function    | Probe Type   | Type  | Optimum Range                                   | Accuracy Specifications <sup>[1]</sup>                          |  |
|-------------|--|---|---|---|--|
|             |  |   |   | 1 Year<br>$T_{CAL} \text{ } ^\circ\text{C} \pm 5^\circ\text{C}$ | Temperature Coefficient<br>$0^\circ\text{C to } (T_{CAL} \text{ } ^\circ\text{C} - 5^\circ\text{C})$<br>$(T_{CAL} \text{ } ^\circ\text{C} + 5^\circ\text{C}) \text{ to } 50^\circ\text{C}$ |
| Temperature | RTD <sup>[2]</sup><br>( $R_0$ is within 49 $\Omega$ and 2.1 k $\Omega$ ) | $\alpha=0.00385$                              | -200 $^\circ\text{C}$ to 660 $^\circ\text{C}$   | 0.16 $^\circ\text{C}$   | 0.01 $^\circ\text{C}$  |
|             |  | $\alpha=0.00389$                              | -200 $^\circ\text{C}$ to 660 $^\circ\text{C}$   | 0.17 $^\circ\text{C}$   | 0.01 $^\circ\text{C}$  |
|             |  | $\alpha=0.00391$                              | -200 $^\circ\text{C}$ to 660 $^\circ\text{C}$   | 0.14 $^\circ\text{C}$   | 0.01 $^\circ\text{C}$  |
|             |  | $\alpha=0.00392$                              | -200 $^\circ\text{C}$ to 60 $^\circ\text{C}$    | 0.15 $^\circ\text{C}$   | 0.01 $^\circ\text{C}$  |
|             | Thermal Resistance   | 2.2 k $\Omega$                                | -40 $^\circ\text{C}$ to 150 $^\circ\text{C}$    | 0.08 $^\circ\text{C}$   | 0.002 $^\circ\text{C}$   |
|             |  | 3 k $\Omega$                                  | -40 $^\circ\text{C}$ to 150 $^\circ\text{C}$    | 0.08 $^\circ\text{C}$   | 0.002 $^\circ\text{C}$   |
|             |  | 5 k $\Omega$                                  | -40 $^\circ\text{C}$ to 150 $^\circ\text{C}$    | 0.08 $^\circ\text{C}$   | 0.002 $^\circ\text{C}$   |
|             |  | 10 k $\Omega$                                 | -40 $^\circ\text{C}$ to 150 $^\circ\text{C}$    | 0.08 $^\circ\text{C}$   | 0.002 $^\circ\text{C}$   |
|             |  | 30 k $\Omega$                                 | -40 $^\circ\text{C}$ to 150 $^\circ\text{C}$    | 0.08 $^\circ\text{C}$   | 0.002 $^\circ\text{C}$   |
|             | Thermocouple <sup>[3]</sup>  | B   | 0 $^\circ\text{C}$ to 1820 $^\circ\text{C}$     | 0.76 $^\circ\text{C}$   | 0.14 $^\circ\text{C}$  |
|             |  | E   | -270 $^\circ\text{C}$ to 1000 $^\circ\text{C}$  | 0.5 $^\circ\text{C}$  | 0.02 $^\circ\text{C}$  |
|             |  | J   | -210 $^\circ\text{C}$ to 1200 $^\circ\text{C}$  | 0.5 $^\circ\text{C}$  | 0.02 $^\circ\text{C}$  |
|             |  | K   | -270 $^\circ\text{C}$ to 1372 $^\circ\text{C}$  | 0.5 $^\circ\text{C}$  | 0.03 $^\circ\text{C}$  |
|             |  | N   | -270 $^\circ\text{C}$ to 1300 $^\circ\text{C}$  | 0.5 $^\circ\text{C}$  | 0.04 $^\circ\text{C}$  |
|             |  | R   | -50 $^\circ\text{C}$ to 1768.1 $^\circ\text{C}$ | 0.5 $^\circ\text{C}$  | 0.09 $^\circ\text{C}$  |
|             |  | S   | -50 $^\circ\text{C}$ to 1768.1 $^\circ\text{C}$ | 0.6 $^\circ\text{C}$  | 0.11 $^\circ\text{C}$  |
|             | T  | -270 $^\circ\text{C}$ to 400 $^\circ\text{C}$ | 0.5 $^\circ\text{C}$                            | 0.03 $^\circ\text{C}$   |  |

[1] Specifications are for 90 minutes warm-up. Probe error excluded.

[2] Specification is for 4WR resistance measurement.

[3] Relative to cold junction temperature, accuracy is based on ITS-90. Built-in cold junction temperature refers to the temperature inside the banana jack and its accuracy is  $\pm 2.5 \text{ } ^\circ\text{C}$ .

**Measuring Characteristics**

|  |  |
|--|--|
| <b>Thermocouple</b>  |  |
| <b>Conversion</b>  | ITS-90 software compensation   |
| <b>Reference Junction Type</b>   | Internal, Fixed, or External   |
| <b>T/C Check</b>   | Selectable per channel. When the channel resistance is $>5k\Omega$ , it is considered as Open.                                     |
| <b>RTD</b>   |  |
| <b>Alpha</b>   | = 0.00385 (DIN/IEC 751): using ITS-90 software compensation;<br>= 0.00389, 0.00391 or 0.00392: using IPTS-68 software compensation |
| <b>Thermistor</b>  |  |
|  | 44004, 44007, 44006 series   |
| <b>Measurement Considerations</b>  |  |
| The built-in cold junction temperature tracks the temperature inside the terminal block. The change of temperature in the terminal block might cause additional error. When using the built-in cold junction compensation, connect the sensor terminal of the thermocouple to the terminal block and warm it up for more than 3 minutes to minimize the error. |  |

## Module Specifications

### MC3120/MC3132/MC3164/MC3324/MC3416/MC3648

|   | Multiplexer             |                         |                       |                         | Actuator | Matrix  |
|---|-------------------------|-------------------------|-----------------------|-------------------------|----------|---------|
| General                                   | MC3120                  | MC3132                  | MC3164                | MC3324                  | MC3416   | MC3648  |
| Number of Channels                        | 20                      | 32                      | 64                    | 20 Voltage+4 Current    | 16       | 4×8     |
|   | 2/4 wire <sup>[1]</sup> | 2/4 wire <sup>[1]</sup> | 1 wire <sup>[2]</sup> | 2/4 wire <sup>[3]</sup> | SPDT     | 2 wire  |
| Connect to DMM Module?                    | Yes                     | Yes                     | Yes                   | Yes                     | No       | No      |
| Scanning Speed <sup>[4]</sup>             | 60Ch/s                  | 60Ch/s                  | 60Ch/s                | 60Ch/s                  | --       | --      |
| Open/Close Speed                          | 200Ch/s                 | 200Ch/s                 | 200Ch/s               | 200Ch/s                 | 200Ch/s  | 200Ch/s |
| Maximum Input                             |                         |                         |                       |                         |          |         |
| Voltage (DC, AC rms)                      | 300Vrms                 | 300Vrms                 | 300Vrms               | 300Vrms                 | 300Vrms  | 300Vrms |
| Current (DC, AC rms)                      | 1Arms                   | 1Arms                   | 1Arms                 | 1Arms                   | 2Arms    | 1Arms   |
| Power (W, VA)                             | 50VA                    | 50VA                    | 50VA                  | 50VA                    | 60VA     | 50VA    |
| Isolation (ch-ch, ch-earth) (DC, AC rms)  | 300Vrms                 | 300Vrms                 | 300Vrms               | 300Vrms                 | 300Vrms  | 300Vrms |
| DC Characteristics                        |                         |                         |                       |                         |          |         |
| Offset Voltage                            | 5uV                     | 5uV                     | 5uV                   | 5uV                     | <3uV     | 5uV     |
| Initial Closed Channel Resistance         | <1Ω                     | <1Ω                     | <1Ω                   | <1Ω                     | <0.1Ω    | <1Ω     |
| Isolation (ch-ch, ch-earth)               | >10GΩ                   | >10GΩ                   | >10GΩ                 | >10GΩ                   | >10GΩ    | >10GΩ   |
| AC Characteristics                        |                         |                         |                       |                         |          |         |
| Bandwidth                                 | 1MHz                    | 1MHz                    | 1MHz                  | 1MHz                    | 1MHz     | 1MHz    |
| Ch-Ch Cross Talk (dB) <sup>[5]</sup> 1MHz | -45                     | -45                     | -18 <sup>[6]</sup>    | -45                     | -15      | -18     |
| Capacitance HI-LO                         | 100pF                   | 100pF                   | 100pF                 | 100pF                   | <500pF   | 100pF   |
| Capacitance LO-Earth                      | 200pF                   | 200pF                   | 200pF                 | 200pF                   | <200pF   | 200pF   |



| Volt-Hertz Limit                                  | 10 <sup>8</sup> | 10 <sup>8</sup> | 10 <sup>8</sup>      | 10 <sup>8</sup> | 10 <sup>8</sup> | 10 <sup>8</sup> |
|---|-----------------|-----------------|----------------------|-----------------|-----------------|-----------------|
| <b>Other</b>                                      |                 |                 |                      |                 |                 |                 |
| T/C Cold Junction Accuracy (Typical)              | 0.8°C           | 0.8°C           | 0.8°C <sup>[7]</sup> | 0.8°C           | --              | --              |
| Switch Life (No Load) (Typical)                   | 100M            | 100M            | 100M                 | 100M            | 100M            | 100M            |
| Switch Life (Rated Load) (Typical) <sup>[8]</sup> | 100K            | 100K            | 100K                 | 100K            | 100K            | 100K            |
| Operating Temperature                             | 0°C - 55°C      | 0°C - 55°C      | 0°C - 55°C           | 0°C - 55°C      | 0°C - 55°C      | 0°C - 55°C      |
| Storage Temperature                               | -20°C - 70°C    | -20°C - 70°C    | -20°C - 70°C         | -20°C - 70°C    | -20°C - 70°C    | -20°C - 70°C    |
| Humidity (non-condensing)                         | 40°C/ 80% RH    | 40°C/80% RH     | 40°C/80% RH          | 40°C/80% RH     | 40°C/80% RH     | 40°C/80% RH     |

- [1] The 20-channel multiplexer can be used as 20 two-wire measurement channels or 10 four-wire measurement channels. The 32-channel multiplexer can be used as 32 two-wire measurement channels or 16 four-wire measurement channels.
- [2] The 2 groups of channels (32 channels per group) of the 64-channel multiplexer use the same LO terminal.
- [3] The 24-channel multiplexer can be used as 20 two-wire measurement channels or 10 four-wire measurement channel and 4 current channels.
- [4] Integration time: 0.02PLC, channel delay: 0, auto zero: off, alarm: off, scaling: off, display: off, data to internal memory.
- [5] Matching impedance is 50Ω.
- [6] The isolation between banks is greater than 40dB.
- [7] The thermocouple precision of this module depends on the LO setting rather than the temperature of the cold terminal.
- [8] Only for resistive loads.

**MC3534**

| <b>Digital Input/Output (DIO)</b>  |   |                |  |                                     |                                       |
|------------------------------------|---|----------------|--|-------------------------------------|---------------------------------------|
| <b>Port 1,2,3,4</b>                | 8-bit, input or output, non-isolated              |                |  |                                     |                                       |
| <b>Type</b>                        | <b>Vin(L)</b>                                     | <b>Vin(H)</b>  | <b>Vout(L)</b>                                     | <b>Vout(H)</b>                      | <b>Vin(H) Max</b>                     |
| <b>TTL</b>                         | <0.8V   | >2.0V          | <0.2V@I <sub>out</sub> =-500mA                     | >4.8V@I <sub>out</sub> =1mA         | <42V with external open drain pull-up |
| <b>5V CMOS</b>                     | <1.5V   | >3.5V          | <0.2V@I <sub>out</sub> =-500mA                     | >4.8V@I <sub>out</sub> =1mA         |                                       |
| <b>3.3V CMOS</b>                   | <1.0V   | >2.3V          | <0.2V@I <sub>out</sub> =-500mA                     | >3.15V@I <sub>out</sub> =1mA        |                                       |
| <b>2.5V CMOS</b>                   | <0.75V  | >1.75V         | <0.2V@I <sub>out</sub> =-500mA                     | >2.35V@I <sub>out</sub> =1mA        |                                       |
| <b>User defined</b>                | Threshold-0.3V                                    | Threshold+0.3V | <0.2V@I <sub>out</sub> =-500mA                     | >(Level-0.2V)@I <sub>out</sub> =1mA |                                       |
| <b>Alarming</b>                    | Match or mismatch, maskable                       |                |  |                                     | Match or mismatch, maskable           |
| <b>Speed</b>                       | 4ms (Max) alarm sampling                          |                |  |                                     | 4ms (Max) alarm sampling              |
| <b>Latency</b>                     | 5ms   |                |  |                                     | 5ms                                   |
| <b>Read/Write Speed</b>            | 100/s   |                |  |                                     | 100/s                                 |
| <b>Totalizer Input (TOT)</b>       |   |                |  |                                     |                                       |
|                                    | <b>High Speed (TOT1,TOT2)</b>                     |                | <b>Normal Speed (TOT3,TOT4)</b>                    |                                     |                                       |
| <b>Maximum Count</b>               | 2 <sup>32</sup> -1                                |                | 2 <sup>32</sup> -1                                 |                                     |                                       |
| <b>Totalizer Input</b>             | 10MHz (max), rising or falling edge, programmable |                | 100kHz (max), rising or falling edge, programmable |                                     |                                       |
| <b>Signal Level</b>                | CMOS 3.3V, 5V tolerable                           |                | 1Vp-p(min), 42Vpk(max), Vcm=-12V~+12V              |                                     |                                       |
| <b>Threshold</b>                   | Fixed at CMOS 3.3V                                |                | -12V~+12V, programmable                            |                                     |                                       |
| <b>Gated Input</b>                 | CMOS 3.3V-Hi, CMOS 3.3V-Lo or none, 5V tolerance  |                | CMOS 3.3V-Hi, CMOS 3.3V-Lo or none, 5V tolerance   |                                     |                                       |
| <b>Count Reset</b>                 | Manual or Read + Reset                            |                | Manual or Read + Reset                             |                                     |                                       |
| <b>Read Speed</b>                  | 100/s   |                | 100/s  |                                     |                                       |
| <b>Analog Voltage Output (DAC)</b> |   |                |  |                                     |                                       |
| <b>DAC 1,2,3,4</b>                 | ±12V, non-isolated (earth referenced)             |                |  |                                     |                                       |
| <b>Resolution</b>                  | 1mV   |                |  |                                     |                                       |
| <b>Iout</b>                        | 10mA max  |                |  |                                     |                                       |
| <b>Setting Time</b>                | 1ms to 0.01 % of output                           |                |  |                                     |                                       |

|                                      |                                |
|--------------------------------------|--------------------------------|
| <b>Accuracy</b><br><b>1 year±5°C</b> | ±(% output + mV)<br>0.25%+20mV |
| <b>Temp</b><br><b>Coefficient</b>    | ±(0.015%+1mV)/°C               |

## General Specifications

|                             |   |
|-----------------------------|---|
| <b>Display</b>              | 4.3 inches  |
| <b>Power Supply</b>         | AC 100V - 120V, 45Hz - 440Hz<br>AC 200V - 240V, 45Hz - 66Hz<br>Detect the power frequency automatically at power-on, 400 Hz defaults to 50 Hz |
| <b>Power Consumption</b>    | 25 VA Max   |
| <b>Working Environment</b>  | Full accuracy for 0°C to 50°C<br>Full accuracy to 80% R.H. at 40°C Non-coagulation  |
| <b>Storage Temperature</b>  | -40°C to 70°C   |
| <b>Operation Altitude</b>   | Up to 2000m   |
| <b>Safety</b>               | IEC 61010-1; EN 61010-1; UL 61010-1; CAN/CSA-C22.2 No. 61010-1<br>Measurement CAT I 1000V/CAT II 300V<br>Pollution Degree 2                   |
| <b>EMC</b>                  | EN 61326-1  |
| <b>Weight</b>               | About 5.7 kg (without package)  |
| <b>Dimension</b>            | (height × width × length): 159.0mm × 239.0mm × 373.4mm  |
| <b>Remote Interface</b>     | GPIB, 10/100Mbit LAN, USB 2.0 Full Speed Device & Host (support USB storage device), RS-232   |
| <b>Programming Language</b> | SCPI  |
| <b>LXI Compatibility</b>    | LXI Core 2011 Device, Version 1.4   |
| <b>Warm-up Time</b>         | 90 minutes  |