

## Product Datasheet - Technical Specifications



More information in our Web-Shop at ► [www.meilhaus.com](http://www.meilhaus.com) and in our download section.

### Your contact

**Technical and commercial sales, price information,  
quotations, demo/test equipment, consulting:**

Tel.: **+49 - 81 41 - 52 71-0**

FAX: **+49 - 81 41 - 52 71-129**

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

Downloads:

[www.meilhaus.com/en/infos/download.htm](http://www.meilhaus.com/en/infos/download.htm)

**Meilhaus Electronic GmbH** | Tel. **+49 - 81 41 - 52 71-0**  
Am Sonnenlicht 2 | Fax **+49 - 81 41 - 52 71-129**  
82239 Alling/Germany | E-Mail [sales@meilhaus.com](mailto:sales@meilhaus.com)

Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.  
© Meilhaus Electronic.

[www.meilhaus.de](http://www.meilhaus.de)



# DG1000Z Series Function/Arbitrary Waveform Generator



- SiFi (Signal Fidelity) for 100% waveform replication
- 2Mpts or 8Mpts/CH(std.), 16Mpts/CH (opt.) arbitrary waveform length
- Standard 2 full functional independent channels
- $\pm 1$ ppm frequency stability,  $-125$ dBc/Hz phase noise, 200ps low jitter
- Built-in 8 orders harmonics generator
- Built-in 7 digits/s counter up to 200MHz
- 160 built-in pre-edited waveforms
- Intuitive arbitrary waveform editing software
- Full modulation supported: AM, FM, PM, ASK, FSK, PSK and PWM

DG1000Z series function/arbitrary waveform generator is a multi-functional generator that combines many functions in one, including Function Generator, Arbitrary Waveform Generator, Noise Generator, Pulse Generator, Harmonics Generator, Analog/Digital Modulator and Counter. As a multi-functional, high performance and portable generator, it will be a new selection in education, R&D, production, test and etc.

# DG1000Z Series Function/Arbitrary Waveform Generator




Dimensions: Width x Height x Depth=261.5mm x 112mm x 318.4mm  
Weight: 3.2kg (without package)

## ► Feature and Benefits



Standard 2 full functional channels

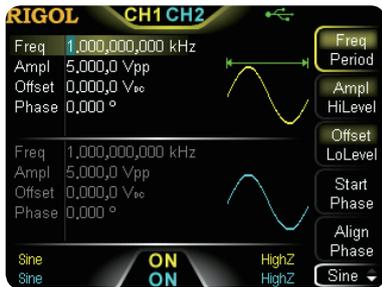


Arbitrary waveform function with innovative SiFi technology



Up to 160 built-in waveforms



Burst function

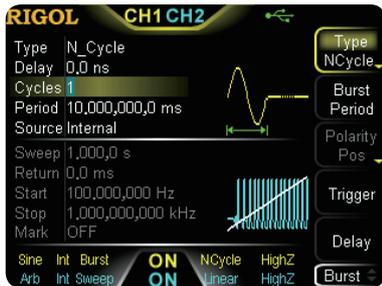

Multiple analog and digital modulations



Sweep function



Standard harmonic generator



Waveform summing function



Standard 7 digits/s full function frequency counter with 200MHz bandwidth



Channels and system setting



In line with LXI Core 2011 Device



File Management Function



## ► Specifications

All the specifications can be guaranteed if the following two conditions are met unless where noted.

- The generator is within the calibration period and has performed self-calibration.
  - The generator has been working continuously for at least 30 minutes under the specified temperature (18°C ~ 28°C ).
- All the specifications are guaranteed unless those marked with "typical".

Model	DG1022Z	DG1032Z	DG1062Z
Channel	2	2	2
Max Frequency	25 MHz	30 MHz	60 MHz
Sample Rate	200 MSa/s		

Waveform	
Basic Waveform	Sine, Square, Ramp, Pulse, Noise
Built-in Arbitrary Waveform	160 kinds, including Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, Dual-Tone, etc.

Frequency Characteristics			
Sine	1 $\mu$ Hz to 25 MHz	1 $\mu$ Hz to 30 MHz	1 $\mu$ Hz to 60 MHz
Square	1 $\mu$ Hz to 25 MHz	1 $\mu$ Hz to 25 MHz	1 $\mu$ Hz to 25 MHz
Ramp	1 $\mu$ Hz to 500 kHz	1 $\mu$ Hz to 500 kHz	1 $\mu$ Hz to 1 MHz
Pulse	1 $\mu$ Hz to 15 MHz	1 $\mu$ Hz to 15 MHz	1 $\mu$ Hz to 25 MHz
Harmonic	1uHz to 10 MHz	1 $\mu$ Hz to 10 MHz	1uHz to 20 MHz
Noise (-3dB)	25 MHz bandwidth	30 MHz bandwidth	60 MHz bandwidth
Arbitrary Waveform	1 $\mu$ Hz to 10 MHz	1 $\mu$ Hz to 10 MHz	1 $\mu$ Hz to 20 MHz
Resolution	1 $\mu$ Hz		
Accuracy	$\pm 1$ ppm of the setting value, 18°C to 28°C		

Sine Wave Spectrum Purity	
Harmonic Distortion	Typical (0 dBm) DC-10 MHz (included): <-65 dBc 10 MHz to 30 MHz (included): <-55 dBc 30 MHz to 60 MHz (included): <-50 dBc
Total Harmonic Distortion	<0.075% (10 Hz to 20 kHz, 0 dBm)
Spurious (non-harmonic)	Typical (0 dBm) $\leq 10$ MHz: <-70 dBc >10 MHz: <-70 dBc + 6 dB/octave
Phase Noise	Typical (0 dBm, 10 kHz offset) 10 MHz: <-125 dBc/Hz

Signal Characteristics			
<b>Square</b>			
Rise/Fall Time	Typical (1 Vpp) <10ns		
Overshoot	Typical (100 kHz, 1 Vpp) $\leq 5\%$		
Duty Cycle	0.01% to 99.99% (limited by the current frequency setting)		
Non-symmetry	1% of the period + 5 ns		
Jitter (rms)	Typical (1 Vpp) $\leq 5$ MHz: 2 ppm + 200 ps > 5 MHz: 200 ps		
<b>Ramp</b>			
Linearity	$\leq 1\%$ of peak output (typical, 1 kHz, 1 VPP, 100% symmetry)		
Symmetry	0% to 100%		
<b>Pulse</b>			
Pulse Width	16ns to 999.999 982 118ks (limited by the current frequency setting)		
Duty Cycle	0.001% to 99.999% (limited by the current frequency setting)		
Rising/Falling Edge	$\geq 10$ ns (limited by the current frequency setting and pulse width setting)		
Overshoot	Typical (1 Vpp) $\leq 5\%$		
Jitter (rms)	Typical (1 Vpp) $\leq 5$ MHz 2 ppm + 200 ps > 5 MHz 200 ps		
<b>Arbitrary Waveform</b>			
Waveform Length	2Mpts (std.) 16Mpts (opt.)	8Mpts (std.) 16Mpts (opt.)	8Mpts (std.) 16Mpts (opt.)

Vertical Resolution	14 bits
Sample Rate	200MSa/s
Min Rise/Fall Time	Typical (1 Vpp) <10 ns
Jitter (rms)	Typical (1 Vpp) ≤5 MHz: 2 ppm + 200 ps > 5 MHz: 200 ps
Editing Mode	Point Edit, Block Edit, Insert Waveform
<b>Harmonic Output</b>	
Harmonic Order	≤8
Harmonic Type	Even Harmonic, Odd harmonic, Order Harmonic, User
Harmonic Amplitude	The amplitude of each order of harmonic can be set
Harmonic Phase	The phase of each order of harmonic can be set

#### Output Characteristics

<b>Amplitude (into 50 Ω)</b>	
Range	≤10 MHz: 1.0 mVpp to 10 Vpp ≤30 MHz: 1.0 mVpp to 5.0 Vpp ≤60 MHz: 1.0 mVpp to 2.5 Vpp
Accuracy	Typical (1 kHz sine, 0 V offset, >10 mVpp, auto) ±(1% of the setting value) ±1 mV
Flatness	Typical (sine, 2.5 Vpp) ≤10 MHz: ±0.1 dB ≤60 MHz: ±0.2 dB
Unit	Vpp, Vrms, dBm
Resolution	0.1mVpp or 4 digits
<b>Offset (into 50 Ω)</b>	
Range (Peak ac+dc)	±5Vpk ac+dc
Accuracy	±(1% of the setting value + 5mV + 0.5% of the amplitude)
<b>Waveform Output</b>	
Output Impedance	50 Ω (typical)
Protection	Short-circuit protection, automatically disable the waveform output when overload occurs

#### Modulation Characteristics

Modulation Type	AM, FM, PM, ASK, FSK, PSK, PWM
<b>AM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulation Depth	0% to 120%
Modulating Frequency	2 mHz to 1 MHz
<b>FM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulating Frequency	2 mHz to 1 MHz
<b>PM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Phase Deviation	0° to 360°
Modulating Frequency	2 mHz to 1 MHz
<b>ASK</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Square with 50% duty cycle
Key Frequency	2 mHz to 1 MHz
<b>FSK</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Square with 50% duty cycle
Key Frequency	2 mHz to 1 MHz
<b>PSK</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External

Modulating Waveform	Square with 50% duty cycle
Key Frequency	2 MHz to 1 MHz
<b>PWM</b>	
Carrier Waveform	Pulse
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Width Deviation	0% to 100% of the pulse width
Modulating Frequency	2 MHz to 1 MHz
<b>External Modulation Input</b>	
Input Range	75 mVRMS to $\pm 5$ Vac + dc
Input Bandwidth	50 kHz
Input Impedance	10K $\Omega$

<b>Burst Characteristics</b>			
Carrier Waveform	Sine, Square, Ramp, Pulse, Noise, Arb (except DC)		
Carrier Frequency	2mHz to 25MHz	2mHz to 30MHz	2 MHz to 60 MHz
Burst Count	1 to 1,000,000 or Infinite		
Start/Stop Phase	0° to 360°, 0.1° resolution		
Internal Period	1 $\mu$ s to 500 s		
Gated Source	External Trigger		
Trigger Source	Internal, External or Manual		
Trigger Delay	0 ns to 100 s		

<b>Sweep Characteristics</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Type	Linear, Log or Step
Direction	Up or Down
Start/Stop Frequency	The same with the upper/lower limit of the corresponding carrier frequency
Sweep Time	1 ms to 500 s
Hold/Return Time	0 ms to 500 s
Trigger Source	Internal, External or Manual
Marker	Falling edge of the sync signal (programmable)

<b>Frequency Counter</b>		
Function	Frequency, Period, Positive/Negative Pulse Width, Duty Cycle	
Frequency Resolution	7 digits/second (Gate Time = 1s)	
Frequency Range	1 $\mu$ Hz to 200 MHz	
Period Measurement	Measurement Range	5ns to 16 days
Voltage Range and Sensitivity (non-modulating signal)		
DC Coupling	DC Offset Range	$\pm 1.5$ Vdc
	1 $\mu$ Hz to 100 MHz	50 mVRMS to $\pm 2.5$ Vac + dc
AC Coupling	100 MHz to 200 MHz	100 mVRMS to $\pm 2.5$ Vac + dc
	1 $\mu$ Hz to 100 MHz	50 mVRMS to $\pm 2.5$ Vpp
100 MHz to 200 MHz	100 mVRMS to $\pm 2.5$ Vpp	

<b>Pulse Width and Duty Cycle Measurement</b>			
Frequency and Amplitude Ranges	1 $\mu$ Hz to 25 MHz	50 mVRMS to $\pm 2.5$ Vac + dc	DC Coupling
Pulse Width	Min Pulse Width	$\geq 20$ ns	
	Pulse Width Resolution	5 ns	
Duty Cycle	Measurement Range (display)	0% to 100%	

<b>Input Characteristics</b>			
Input Signal Range	Breakdown Voltage	$\pm 7$ Vac+dc	Input Impedance = 1 M $\Omega$
	Coupling Mode	AC	DC
Input Adjustment	High-frequency Rejection	On: Input Bandwidth = 250 kHz; Off: Input Bandwidth = 200 MHz	
	Trigger Level Range	-2.5V to +2.5V	
Input Trigger	Trigger Sensitivity Range	0% (about 140 mV hysteresis voltage) to 100% (about 2 mV hysteresis voltage)	
	Gate Time	GateTime1	1.310ms
GateTime2		10.48ms	
GateTime3		166.7ms	
GateTime4		1.342s	
GateTime5		10.73s	
GateTime6		>10s	

Trigger Characteristics	
Trigger Input	
Level	TTL-compatible
Slope	Rising or falling (selectable)
Pulse Width	>100ns
Latency	Sweep: <100 ns (typical) Burst: <300 ns (typical)
Trigger Output	
Level	TTL-compatible
Pulse Width	> 60 ns (typical)
Maximum Frequency	1 MHz

Two-channel Characteristics - Phase Offset	
Range	0° to 360°
Waveform Phase Resolution	0.03°

Reference Clock	
External Reference Input	
Lock Range	10 MHz ± 50 Hz
Level	250 mVpp to 5 Vpp
Lock Time	< 2 s
Input Impedance (Typical)	1 kΩ, AC coupling
Internal Reference Output	
Frequency	10 MHz ± 50 Hz
Level	3.3 Vpp
Input Impedance (Typical)	50 Ω, AC coupling

Sync Output	
Level	TTL-compatible
Impedance	50 Ω, nominal value

Overvoltage Protection	
Occurred when:	
<ul style="list-style-type: none"> <li>The instrument amplitude setting is greater than 2Vpp or the output offset is greater than  2V<sub>bc</sub>  and the input voltage is greater than <math>\pm 11.5 \times (1 \pm 5\%)V</math> (&lt;10kHz).</li> <li>The instrument amplitude setting is lower than or equal to 2Vpp or the output offset is lower than or equal to  2V<sub>bc</sub>  and the input voltage is greater than <math>\pm 3.5 \times (1 \pm 5\%)V</math> (&lt;10kHz).</li> </ul>	

General Specifications	
<b>Power Supply</b>	
Power Voltage	100 V to 240 V (45 Hz to 440 Hz)
Power Consumption	Lower than 40 W
Fuse	250 V, T3.15 A
<b>Display</b>	
Type	3.5-inch TFT LCD
Resolution	320 horizontal × RGB × 240 vertical resolution
Color	16 M color
<b>Environment</b>	
Temperature Range	Operating: 0°C to 50°C Non-operating: -40°C to 70°C
Cooling Method	Fan cooling
Humidity Range	Lower than 30°C : ≤95% relative humidity 30°C to 40°C : ≤75% relative humidity 40°C to 50°C : ≤45% relative humidity
Altitude	Operating: below 3000 meters Non-operating: below 15,000 meters
<b>Mechanical</b>	
Dimensions (W×H×D)	261.5 mm × 112 mm × 318.4 mm
Weight	Without Package: 3.2 kg With Package: 4.5 kg
Interfaces	USB Host, USB Device, LAN
IP Protection	IP2X
Calibration Interval	1 year recommended calibration interval

Certification Information		
EMC	in line with EN61326-1:2006	
	IEC 61000-3-2:2000	±4.0kV (contact discharge) ±4.0kV (air discharge)
	IEC 61000-4-3:2002	3 V/m (80 MHz to 1 GHz) 3 V/m (1.4 GHz to 2 GHz) 1 V/m (2.0 GHz to 2.7 GHz)
	IEC 61000-4-4:2004	1 kV power lines
	IEC 61000-4-5:2001	0.5kV (Phase to Neutral) 0.5kV (Phase to PE) 1 kV (Neutral to PE)
	IEC 61000-4-6:2003	3V,0.15MHz-80MHz
	IEC 61000-4-11:2004	Voltage dip: 0 % UT during half cycle 0 % UT during 1 cycle 70 % UT during 25 cycles Short interruption: 0 % UT during 1 cycle
Electrical Safety	Electrical Safety in line with USA:UL 61010-1:2012, Canada: CAN/CSA-C22.2 No. 61010-1-2012 EN 61010-1:2010	

## ► Ordering Information

	Description	Order Number
Model	DG1022Z (25MHz, Dual-channel)	DG1022Z
	DG1032Z (30MHz, Dual-channel)	DG1032Z
	DG1062Z (60MHz, Dual-channel)	DG1062Z
Standard Accessories	Power Cord	-
	USB Cable	CB-USBA-USBB-FF-150
	BNC Cable	CB-BNC-BNC-MM-100
	Quick Guide	-
	Resource CD (including User's Guide and etc.)	-
Options	16Mpts Memory for Arb	Arb16M-DG1000Z
	Rack Mount Kit (for single instrument)	RM-1-DG1000Z
	Rack Mount Kit (for dual instruments)	RM-2-DG1000Z
	40dB Attenuator	RA5040K
	10W Power Amplifier	PA1011
	USB-GPIB Converter	USB-GPIB

**RIGOL**

**RIGOL**® is the registered trademark of **RIGOL** Technologies, Inc. Product information in this document subject to update without notice.

Oct.2016

## Specifications

Unless otherwise specified, all specifications can be guaranteed if the following two conditions are met.

- The generator is within the calibration period and has performed self-calibration.
- The generator has been working continuously for at least 30 minutes under the specified temperature (18°C~28°C).

All the specifications are guaranteed unless those marked with “typical”.

Model	DG1022Z	DG1032Z	DG1062Z
Channel	2	2	2
Maximum Frequency	25MHz	30MHz	60MHz
Sample Rate	200MSa/s		
<b>Waveforms</b>			
Basic waveforms	Sine, Square, Ramp, Pulse, Noise		
Built-in Arbitrary Waveforms	160 kinds, including Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, Dual-Tone, etc.		
<b>Frequency Characteristics</b>			
Sine	1μHz to 25MHz	1μHz to 30MHz	1μHz to 60MHz
Square	1μHz to 25MHz	1μHz to 25MHz	1μHz to 25MHz
Ramp	1μHz to 500kHz	1μHz to 500kHz	1μHz to 1MHz
Pulse	1μHz to 15MHz	1μHz to 15MHz	1μHz to 25MHz
Harmonic	1μHz to 10MHz	1μHz to 10MHz	1μHz to 20MHz
Noise (-3dB)	25MHz bandwidth	30MHz bandwidth	60MHz bandwidth
Arbitrary Waveform	1μHz to 10MHz	1μHz to 10MHz	1μHz to 20MHz
Resolution	1μHz		
Accuracy	±1ppm of the settings, 18°C to 28°C		
<b>Sine Wave Spectrum Purity</b>			
Harmonic Distortion	Typical (0dBm) DC-10MHz (included): <-65dBc 10MHz-30MHz (included): <-55dBc 30MHz-60MHz (included): <-50dBc		
Total Harmonic Distortion	<0.075% (10Hz-20kHz, 0dBm)		
Spurious (non-harmonic)	Typical (0dBm) ≤10MHz: <-70dBc >10MHz: <-70dBc+6dB/octave		
Phase Noise	Typical (0dBm, 10kHz deviation) 10MHz: <-125dBc/Hz		

<b>Signal Characteristics</b>	
<b>Square</b>	
Rise/Fall Time	Typical (1Vpp) <10ns
Overshoot	Typical (100KHz, 1Vpp) ≤5%
Duty Cycle	0.01% to 99.99% (limited by the current frequency setting)
Non-symmetry	1% of period+5ns
Jitter (rms)	Typical (1MHz, 1Vpp, 50Ω) ≤5MHz: 2ppm+200 ps >5MHz: 200ps
<b>Ramp</b>	
Linearity	≤1% of peak output (typical, 1kHz, 1Vpp, 100% Symmetry)
Symmetry	0% to 100%
<b>Pulse</b>	
Pulse Width	16ns to 999.999 982 118ks (limited by the current frequency setting)
Duty Cycle	0.001% to 99.999% (limited by the current frequency setting)
Leading/Trailing Edge Time	≥10ns (limited by the current frequency and pulse width settings)
Overshoot	Typical (1Vpp) ≤5%
Jitter (rms)	Typical (1Vpp) ≤5MHz: 2ppm+200ps >5MHz: 200ps
<b>Arb</b>	
Waveform Length	8pts to 2Mpts (16Mpts optional) 8pts to 8Mpts (16Mpts optional)
Vertical Resolution	14bits
Sample Rate	200MSa/s
Minimum Rise/Fall Time	Typical (1Vpp) <10ns
Jitter (rms)	Typical (1Vpp) ≤5MHz: 2ppm+200ps >5MHz: 200ps
Edit Method	Edit Points, Edit Block, Insert Waveform
<b>Harmonic</b>	
Harmonic Order	≤8
Harmonic Type	Even, Odd, All, User
Harmonic Amplitude	can be set for all harmonics
Harmonic Phase	can be set for all harmonics

<b>Output Characteristics</b>	
<b>Amplitude (into 50 <math>\Omega</math>)</b>	
Range	$\leq 10\text{MHz}$ : 1.0mVpp to 10Vpp $\leq 30\text{MHz}$ : 1.0mVpp to 5.0Vpp $\leq 60\text{MHz}$ : 1.0mVpp to 2.5Vpp
Accuracy	Typical (1kHz Sine, 0V Offset, >10mVpp, Auto) $\pm 1\%$ of setting $\pm 1\text{mV}$
Flatness	Typical (Sine 2.5Vpp) $\leq 10\text{MHz}$ : $\pm 0.1\text{dB}$ $\leq 60\text{MHz}$ : $\pm 0.2\text{dB}$
Units	Vpp, Vrms, dBm
Resolution	0.1mVpp or 4digits
<b>Offset (into 50 <math>\Omega</math>)</b>	
Range (Peak ac+dc)	$\pm 5\text{Vpk ac+dc}$
Accuracy	$\pm(1\%$ of setting+5mV+0.5% of amplitude)
<b>Waveform Output</b>	
Impedance	50 $\Omega$ (typical)
Protection	Short-circuit protection, automatically disable waveform output when overload occurs
<b>Modulation Characteristics</b>	
Modulation Type	AM, FM, PM, ASK, FSK, PSK, PWM
<b>AM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Depth	0% to 120%
Modulating Frequency	2mHz to 1MHz
<b>FM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulating Frequency	2mHz to 1MHz
<b>PM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Phase Deviation	0° to 360°
Modulating Frequency	2mHz to 1MHz
<b>ASK</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Square with 50% duty cycle
Key Frequency	2mHz to 1MHz

<b>FSK</b>			
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)		
Source	Internal/External		
Modulating Waveform	Square with 50% duty cycle		
Key Frequency	2mHz to 1MHz		
<b>PSK</b>			
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)		
Source	Internal/External		
Modulating Waveform	Square with 50% duty cycle		
Key Frequency	2mHz to 1MHz		
<b>PWM</b>			
Carrier Waveform	Pulse		
Source	Internal/External		
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb		
Width Deviation	0% to 100% of Pulse Width		
Modulating Frequency	2mHz to 1MHz		
<b>[Mod/Trig/FSK/Sync] Input</b>			
Input Range	75mVRMS to $\pm 5V_{ac+dc}$		
Input Bandwidth	50kHz		
Input Impedance	10k $\Omega$		
<b>Burst Characteristics</b>			
Carrier Waveform	Sine, Square, Ramp, Pulse, Noise, Arb (except DC)		
Carrier Frequency	2mHz to 25MHz	2mHz to 30MHz	2mHz to 60MHz
Burst Count	1 to 1,000,000 or Infinite		
Start/Stop Phase	0° to 360°, 0.1° resolution		
Internal Period	1 $\mu$ s to 500s		
Gated Source	External Trigger		
Trigger Source	Internal, External or Manual		
Trigger Delay	0ns to 100s		
<b>Sweep Characteristics</b>			
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)		
Type	Linear, Log or Step		
Direction	Up/Down		
Start/Stop Frequency	Consistent with the upper/lower limit of the frequency of the carrier waveform		
Sweep Time	1ms to 500s		
Hold/Return Time	0ms to 500s		
Trigger Source	Internal, External or Manual		
Mark	Falling edge of the Sync signal (programmable)		

<b>Counter</b>			
Function	Frequency, Period, Positive/Negative Pulse Width, Duty Cycle		
Frequency Resolution	7 digits/second (Gate Time = 1s)		
Frequency Range	1 $\mu$ Hz to 200MHz		
Period Measurement	Measurement Range	5ns to 16 days	
<b>Voltage Range and Sensitivity (Not modulation signal)</b>			
DC Coupling	DC Offset Range	$\pm$ 1.5Vdc	
	1 $\mu$ Hz to 100MHz	50mVRMS to $\pm$ 2.5Vac+dc	
	100MHz to 200MHz	100mVRMS to $\pm$ 2.5Vac+dc	
AC Coupling	1 $\mu$ Hz to 100MHz	50mVRMS to $\pm$ 2.5Vpp	
	100MHz to 200MHz	100mVRMS to $\pm$ 2.5Vpp	
<b>Pulse Width and Duty Cycle Measurement</b>			
Frequency/Amplitude Range	1 $\mu$ Hz to 25MHz	50mVRMS to $\pm$ 2.5Vac+dc	DC Coupling
Pulse Width	Minimum	$\geq$ 20ns	
	Resolution	5ns	
Duty Cycle	Range (Display)	0% to 100%	
<b>Input Characteristics</b>			
Input Signal Range	Breakdown Voltage	$\pm$ 7Vac+dc	Impedance=1M $\Omega$
Input Adjustment	Coupling	AC	DC
	HF Suppression	ON: input bandwidth=250kHz; OFF: input bandwidth=200MHz	
Input Trigger	Trigger Level Range	-2.5V to +2.5V	
	Trigger Sensitivity Range	0% (about 140mV hysteresis voltage) to 100% (about 2mV hysteresis voltage)	
Gate Time	GateTime1	1.310ms	
	GateTime2	10.48ms	
	GateTime3	166.7ms	
	GateTime4	1.342s	
	GateTime5	10.73s	
	GateTime6	>10s	
<b>Trigger Characteristics</b>			
<b>Trigger Input</b>			
Level	TTL-compatible		
Slope	Rising or falling (optional)		
Pulse Width	>100ns		
Latency	Sweep: <100ns (typical) Burst: <300ns (typical)		
<b>Trigger Output</b>			
Level	TTL-compatible		

Pulse Width	>60ns (typical)
Maximum Frequency	1MHz
<b>Two-channel Characteristics - Phase Offset</b>	
Range	0° to 360°
Waveform Phase Resolution	0.03°
<b>Clock Reference</b>	
<b>External Reference Input</b>	
Lock Range	10MHz±50Hz
Level	250mVpp to 5Vpp
Lock Time	<2s
Impedance (typical)	1kΩ, AC coupling
<b>Internal Reference Output</b>	
Frequency	10MHz±50Hz
Level	3.3Vpp
Impedance (typical)	50Ω, AC coupling
<b>Sync Output</b>	
Level	TTL-compatible
Impedance	50Ω, nominal value
<b>Overvoltage Protection</b>	
Overvoltage protection will take effect once any of the following two conditions is met:	
<ul style="list-style-type: none"> <li>● The amplitude setting in the generator is greater than 2Vpp or the output offset is greater than <math> 2V_{DC} </math>, the input voltage is greater than <math>\pm 11.5 \times (1 \pm 5\%)V</math> (&lt;10kHz).</li> <li>● The amplitude setting in the generator is lower than or equal to 2Vpp or the output offset is lower than or equal to <math> 2V_{DC} </math>, the input voltage is greater than <math>\pm 3.5 \times (1 \pm 5\%)V</math> (&lt;10kHz).</li> </ul>	
<b>General Specifications</b>	
<b>Power</b>	
Power Voltage	100V to 240V (45Hz to 440Hz)
Power Consumption	Less than 40W
Fuse	250V, T3.15A
<b>Display</b>	
Type	3-inch TFT LCD
Resolution	320 Horizontal×RGB×240 Vertical Resolution
Color	16M color

<b>Environment</b>		
Temperature Range	Operating: 0°C to 50°C Non-Operating: -40°C to 70°C	
Cooling Method	Cooling by fans compulsively	
Humidity Range	Less than 30°C: ≤95% Relative Humidity (RH) 30°C to 40°C: ≤75% Relative Humidity (RH) 40°C to 50°C: ≤45% Relative Humidity (RH)	
Altitude	Operating: Less than 3000 meters Non-Operating: Less than 15,000 meters	
<b>Mechanical</b>		
Dimensions (W×H×D)	261.5mm×112mm×318.4mm	
Weight	without package: 3.2kg with package: 4.5kg	
<b>Interfaces</b>	USB Host, USB Device, LAN	
<b>IP Protection</b>	IP2X	
<b>Calibration Interval</b>	Recommend calibration interval is one year	
<b>Authentication Information</b>		
<b>EMC</b>	In line with EN61326-1:2006	
	IEC 61000-3-2:2000	±4.0kV (Contact Discharge) ±4.0kV (Air Discharge)
	IEC 61000-4-3:2002	3V/m (80MHz to 1GHz) 3V/m (1.4GHz to 2GHz) 1V/m (2.0GHz to 2.7GHz)
	IEC 61000-4-4:2004	1kV power lines
	IEC 61000-4-5:2001	0.5kV (Phase to Neutral) 0.5kV (Phase to PE) 1kV (Neutral to PE)
	IEC 61000-4-6:2003	3V, 0.15-80MHz
	EC 61000-4-11:2004	Voltage dip: 0%UT during half cycle 0%UT during 1 cycle 70%UT during 25 cycle Short interruption: 0%UT during 1 cycle
<b>Electrical Safety</b>	In line with USA: UL 61010-1:2012, Canada: CAN/CSA-C22.2 No. 61010- 1-2012 EN 61010-1:2010	