

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: **+49 - (0)81 41 - 52 71-0**

FAX: **+49 - (0)81 41 - 52 71-129**

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. **+49 - (0)81 41 - 52 71-0**
Fax **+49 - (0)81 41 - 52 71-129**
E-Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

Modulated Wideband Power Amplifier

1 Introduction

The TBMDA4 modulated wideband power amplifier is designed in order to create an inexpensive signal source for immunity testing of electronic building blocks and products. It is designed to be driven by the tracking generator output of spectrum analyzers. With an input power range of -5 dBm...0 dBm, it can boost the output power of a tracking generator up to 5W. With a frequency range from 100 kHz to 50 MHz, it is an ideal complement to the TBMDA3, which covers 10 MHz to 1 GHz. The TBMDA4 is ideal to drive Tekbox near field probes in order to find the sensitive spot of an electronic circuit or to create electric fields up to 550V/m when driving the Tekbox TEM Cell TBTC0, 300V/m when driving the TBTC1, 150V/m when driving the TBTC2 or 100V/m when driving the TBTC3. Test signals for immunity testing can be CW, AM or PM modulated. Consequently, the TBMDA4 provides built in modulation capability to generate 1 kHz AM or PM signals. In PM mode, the TBMDA4 can also generate a 217 Hz Signal with 12.5% duty cycle in order to simulate mobile phone TDMA noise.



Picture 1 – TBMDA4 modulated wideband driver amplifier, front view



Picture 2 – TBMDA4 modulated wideband driver amplifier, rear view

Modulated Wideband Power Amplifier

Application:

General-purpose power amplifier

Signal source for immunity testing, driving near field probes

Signal source for immunity testing, driving TEM Cells

Features:

CW amplifier (modulation off)

1 kHz, 80% AM modulation

1 kHz, 50% duty cycle pulse modulation

217 Hz, 12.5% duty cycle pulse modulation

2 Electrical Specifications

Technical Data:

Input / Output: 50 Ohm, N female

Supply Voltage range: 110 V...240 V

Supply power consumption: 20 W

Operating temperature range: -20°C to 50°C

Frequency range: 100 kHz – 50 MHz

1dB output compression point @ 1 MHz: +35.5 dBm typ.

1dB output compression point @ 10 MHz: +36 dBm typ.

1dB output compression point @ 50 MHz: +36.5 dBm typ.

2nd harmonic, 20 MHz, Pout=36dBm: < - 15 dBc typ.

2nd harmonic, 25 MHz, Pout=30dBm: < - 20 dBc typ.

3rd harmonic, 25 MHz, Pout=36dBm: < - 25 dBc typ.

3rd harmonic, 25 MHz, Pout=30dBm: < - 30 dBc typ.

Total harmonic distortion:

6.7% @25MHz, Pout=27dBm typ.

8.5% @25 MHz, Pout=30 dBm typ.

12% @25 MHz, Pout=33 dBm typ.

15% @25 MHz, Pout=36 dBm typ.

Third order intercept point:

+53dBm, @25 MHz, $\Delta f = 200\text{kHz}$ typ.

Noise figure: 9 dB

Modulated Wideband Power Amplifier

Internal modulation frequency AM: 1 kHz \pm 20%

Internal modulation frequencies PM: 1 kHz \pm 10%, 217 Hz \pm 20%

Duty cycle, PM: 50% \pm 10% @ 1 kHz; 12.5% \pm 20% @ 217 Hz

Maximum ratings:

Maximum input power: 0 dBm

The output of the TBMDA4 is quite tolerant to output mismatch, however open or shorted load is not recommended, potentially can cause damage.

Small Signal Gain (measured with Pin = - 20 dBm):

50 kHz	100 kHz	500 kHz	1 MHz	5 MHz	10 MHz	25 MHz	50 MHz	70 MHz
39.3 dB	44.9 dB	47.1 dB	47.2 dB	47.3 dB	47.5 dB	48.6 dB	49.9 dB	44.5 dB

Table 1 – TBMDA4 gain

Linear output power:

50 kHz	100 kHz	500 kHz	1 MHz	5 MHz	10 MHz	25 MHz	50 MHz	70 MHz
32.8 dBm	33.9 dBm	34.4 dBm	35.3 dBm	35.5 dBm	35.7 dBm	35.8dBm	35.8 dBm	33.2 dBm
@Pin= -6 dBm	@Pin= -10 dBm	@Pin= -12 dBm	@Pin= -11 dBm	@Pin= -11 dBm	@Pin= -11 dBm	@Pin= -12 dBm	@Pin= -13 dBm	@Pin= -10 dBm

Table 2 – TBMDA4, linear output power versus frequency, 50 kHz – 70 MHz

Saturated output power:

50 kHz	100 kHz	500 kHz	1 MHz	5 MHz	10 MHz	25 MHz	50 MHz	70 MHz
34.1 dBm	34.9 dBm	35.3 dBm	36.3 dBm	37.3 dBm	37.4 dBm	37.5dBm	37.6 dBm	36.6 dBm
@Pin= -3 dBm	@Pin= -5 dBm	@Pin= -7 dBm	@Pin= -3 dBm					

Table 3 – TBMDA4, saturated output power versus frequency, 50 kHz – 70 MHz

Modulated Wideband Power Amplifier

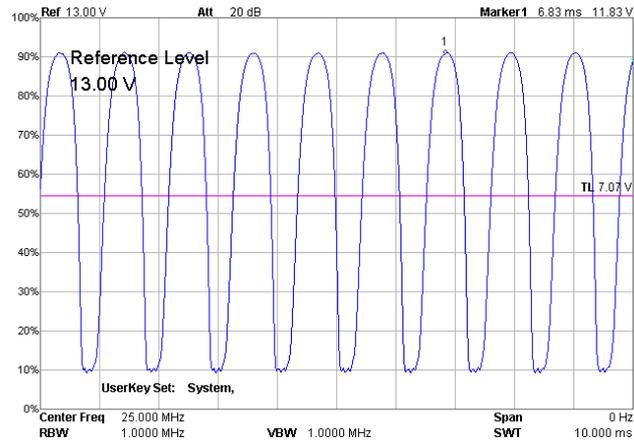


Figure 1 – 1 kHz, 80 % AM envelope, 25 MHz

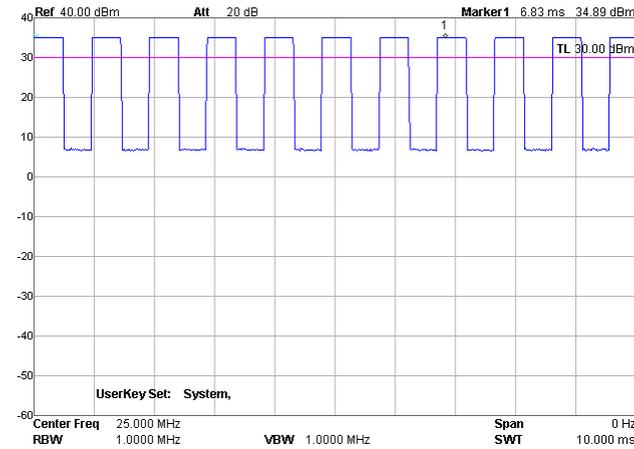


Figure 2 – 1 kHz, 50 % PM envelope, 25 MHz

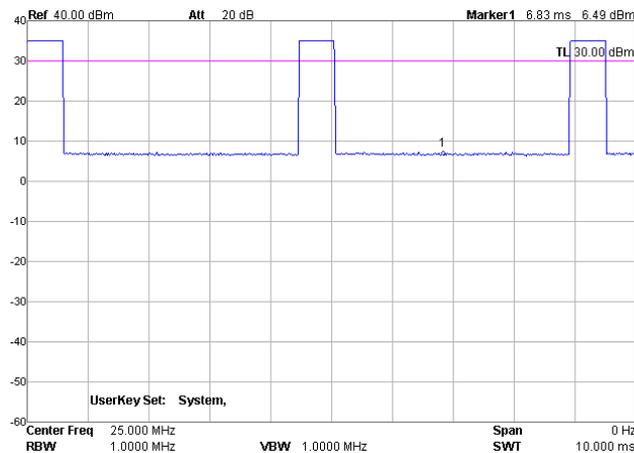


Figure 3 – 217 Hz, 12.5 % PM envelope, 25 MHz

Modulated Wideband Power Amplifier

3 Applications

Immunity testing using a TEM cell

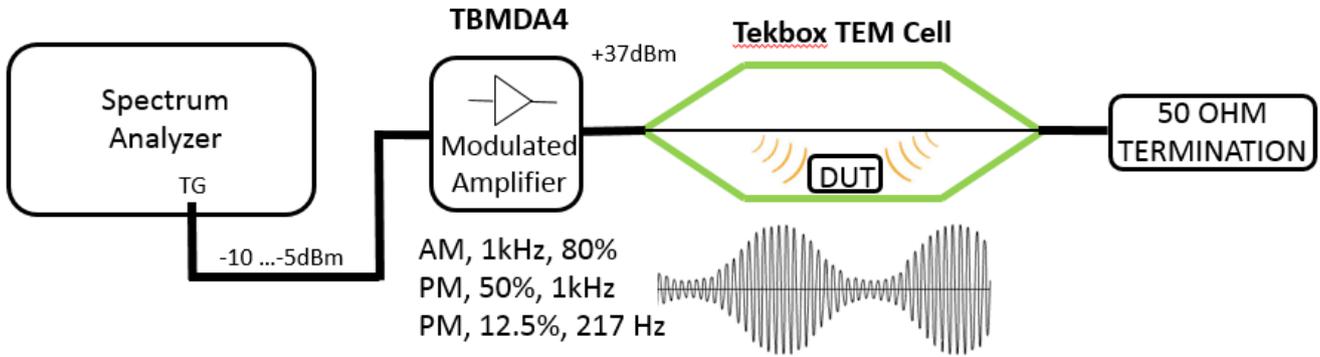


Figure 4 – immunity testing set up

Immunity testing using near field probes

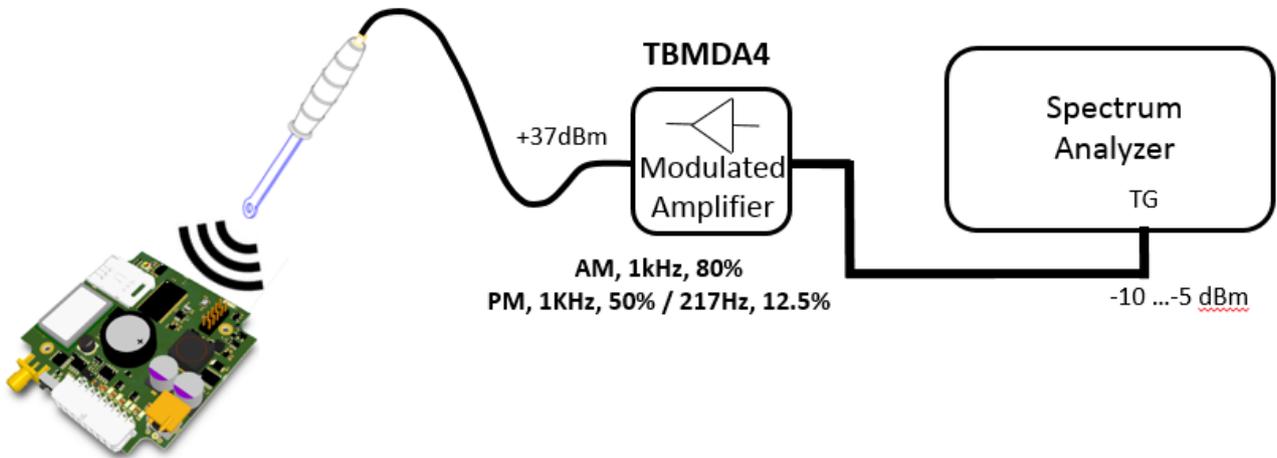


Figure 5 – immunity testing set up

Modulated Wideband Power Amplifier

4 TEM Cell field strength

A typical pre compliance set up for immunity testing is typically not sophisticated enough to measure the real field strength inside the TEM cell. However, the field strength can be approximated mathematically.

The E-field (V/m) between septum and lower (upper) wall of a TEM cell is $E = V/d$ where V is the RMS voltage of the applied signal and d is the distance between septum and lower (upper) wall. This is based on the simplified assumption that the E field would be perfectly homogenous/evenly distributed. A more practical formula is $E = V \cdot \text{Cor}/d$ where Cor is a correction factor for the average field strength over the volume of the DUT derived from the analysis of the field distribution over the cross section of the cell.

Assuming the DUT is placed in the center of the cell and in the middle between bottom wall and septum, we can however use the simplified formula with sufficient accuracy.

$$\text{TBTC0: } d = 2.8 \text{ cm} \rightarrow E_{[V/m]} = (\sqrt{P \cdot 50\Omega}) \cdot 35.7$$

$$\text{TBTC1: } d = 5 \text{ cm} \rightarrow E_{[V/m]} = (\sqrt{P \cdot 50\Omega}) \cdot 20$$

$$\text{TBTC2: } d = 10 \text{ cm} \rightarrow E_{[V/m]} = (\sqrt{P \cdot 50\Omega}) \cdot 10$$

$$\text{TBTC3: } d = 15 \text{ cm} \rightarrow E_{[V/m]} = (\sqrt{P \cdot 50\Omega}) \cdot 6.66$$

The power P in the formulas above has to be entered in [Watt]

$$P_{[W]} = 0.001 \cdot (10^{(P_{[dBm]}/10)})$$

Frequency [MHz]	Input power [dBm]	Output power [dBm]	Field strength TBTC0 [V/m]	Field strength TBTC1 [V/m]	Field strength TBTC2 [V/m]	Field strength TBTC3 [V/m]
0.05	-3	34.1	405	227	113	76
0.1	-5	34.9	444	249	124	83
0.5	-7	35.3	465	260	130	87
1	-7	36.3	522	292	146	97
5	-7	37.3	585	328	164	109
10	-7	37.4	592	332	166	111
25	-7	37.5	599	335	168	112
50	-7	37.6	606	339	170	113
70	-3	36.6	540	302	151	101

Table 3 – calculated field strength for TBMDA4 driving Tekbox TEM cells

Modulated Wideband Power Amplifier

5 PC Software for immunity testing

The Tekbox EMCview SW is regularly updated and now supports immunity testing with a feature for automated tracking generator control. This significantly simplifies immunity testing, especially in case of repeated testing during validation of DUT modifications/improvements.

Tekbox EMCview currently supports Rigol, Siglent, R&S FPC and FPH series spectrum analyzers.

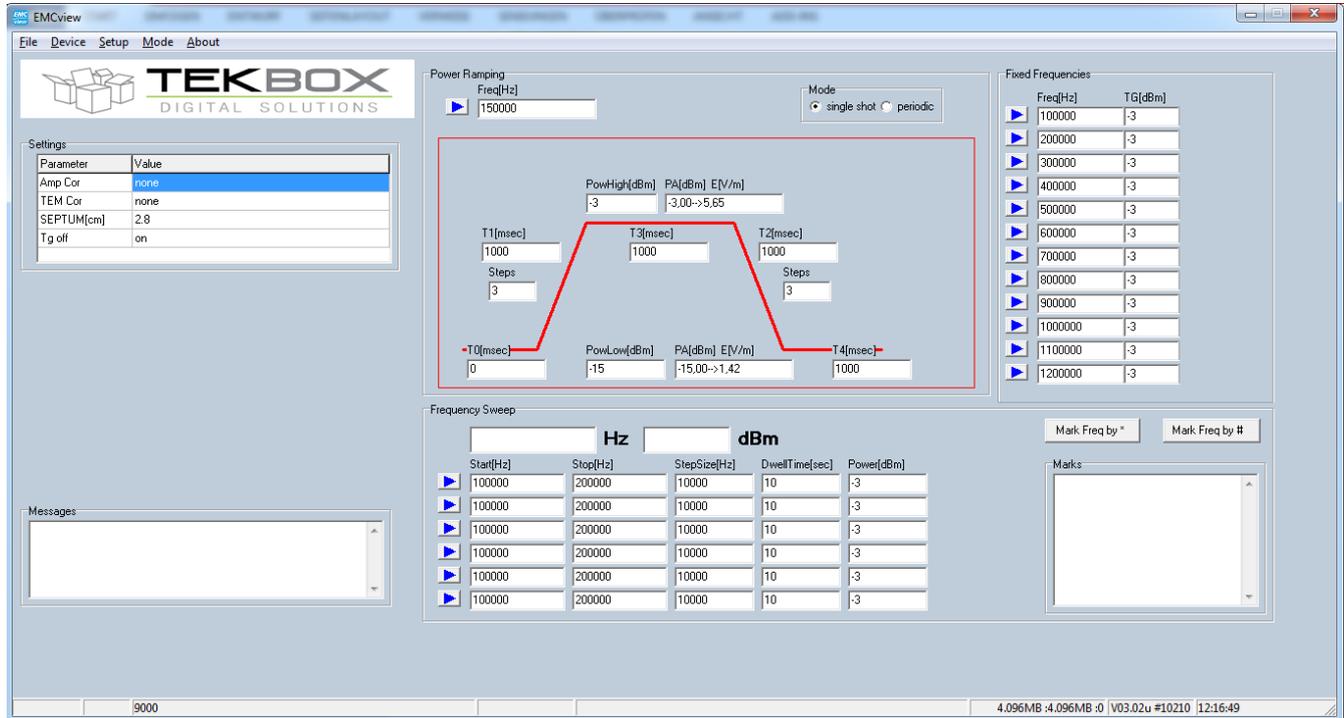


Figure 8 – screenshot of the tracking generator control feature of EMCview

WARNING:

Never connect the output of the TBMDA4 directly to the input of a spectrum analyzer. Check the maximum input ratings of the spectrum analyzer and protect it with an appropriate attenuator. Open or shorted load is not recommended, potentially can cause damage of the RF output stage.

Example:

Rigol DSA815 – maximum input power rating: +20dBm

Modulated Wideband Power Amplifier

6 Ordering Information

Part Number	Description
TBMDA4-EU	modulated power amplifier, 2 pcs 75cm N-male to N-male cables, 1 pc 30dB / 10W attenuator with N-connectors, C13 Schuko power cord
TBMDA4-US	modulated power amplifier, 2 pcs 75cm N-male to N-male cables, 1 pc 30dB / 10W attenuator with N-connectors, C13 US power cord
TBMDA4-UK	modulated power amplifier, 2 pcs 75cm N-male to N-male cables, 1 pc 30dB / 10W attenuator with N-connectors, C13 English power cord
TBMDA4-AU	modulated power amplifier, 2 pcs 75cm N-male to N-male cables, 1 pc 30dB / 10W attenuator with N-connectors, C13 Australian power cord

Table 5 – Ordering Information

7 History

Version	Date	Author	Changes
V1.0	6.9.2018	Mayerhofer	Creation of the document
V1.1	30.3.2021	Mayerhofer	Updated chapter 6
V1.2	9.4.2021	Mayerhofer	Corrected table 3

Table 6 – History