

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: **+49 - (0)81 41 - 52 71-0**

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. **+49 - (0)81 41 - 52 71-0** E-
Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

www.meilhaus.com

RF PULSE CURRENT MONITORING PROBE

1 Introduction

The TBPCP3-20H70 is an RF pulse current monitoring probe, expanding the Tekbox product range of affordable test equipment.

The probe has a 3 dB bandwidth from 20 Hz to 70 MHz and is characterized over the frequency range from 1 Hz to 100 MHz. The TBPCP3-20H70 is typically used for surge or RF pulse current monitoring applications in the time domain, in contrary to RF current monitoring probes designed for EMC applications, which are typically used for measurements in the frequency domain.



Picture 1: TBPCP3-20H70 current monitoring probe

The aperture of the RF current monitoring probe is 15 mm.

The transfer-impedance is -12 dB Ω / 0.25 V/A when terminated with 50 Ohm and 0.5 V/A with a high impedance load. The typical 3dB bandwidth is 20 Hz to 70 MHz.



RF PULSE CURRENT MONITORING PROBE

2 Specification

Characterized frequency range: 0.1 Hz to 100 MHz
 3 dB bandwidth: 20 Hz to 70 MHz (measured in a 50 + 50 Ohm loop)
 Transfer impedance into 50 Ω load: -12 dB Ω ; 0.25 V/A
 Transfer impedance into high Z: 0.5 V/A
 Probe port impedance: 50 Ω
 Droop rate: 6 %/ms
 Rise time: < 9 ns
 Max. RMS AC current: 8A
 Max. pulse current: 1500A
 Current time product: 0.03 Ampere seconds
 Max. core temperature: 80 °C
 Aperture diameter: 15 mm
 Outside diameter: 61 mm
 Height: 30 mm
 Weight: 320 g
 Connector type: N female; comes supplied with a coaxial adapter to BNC-female

3 Transfer impedance

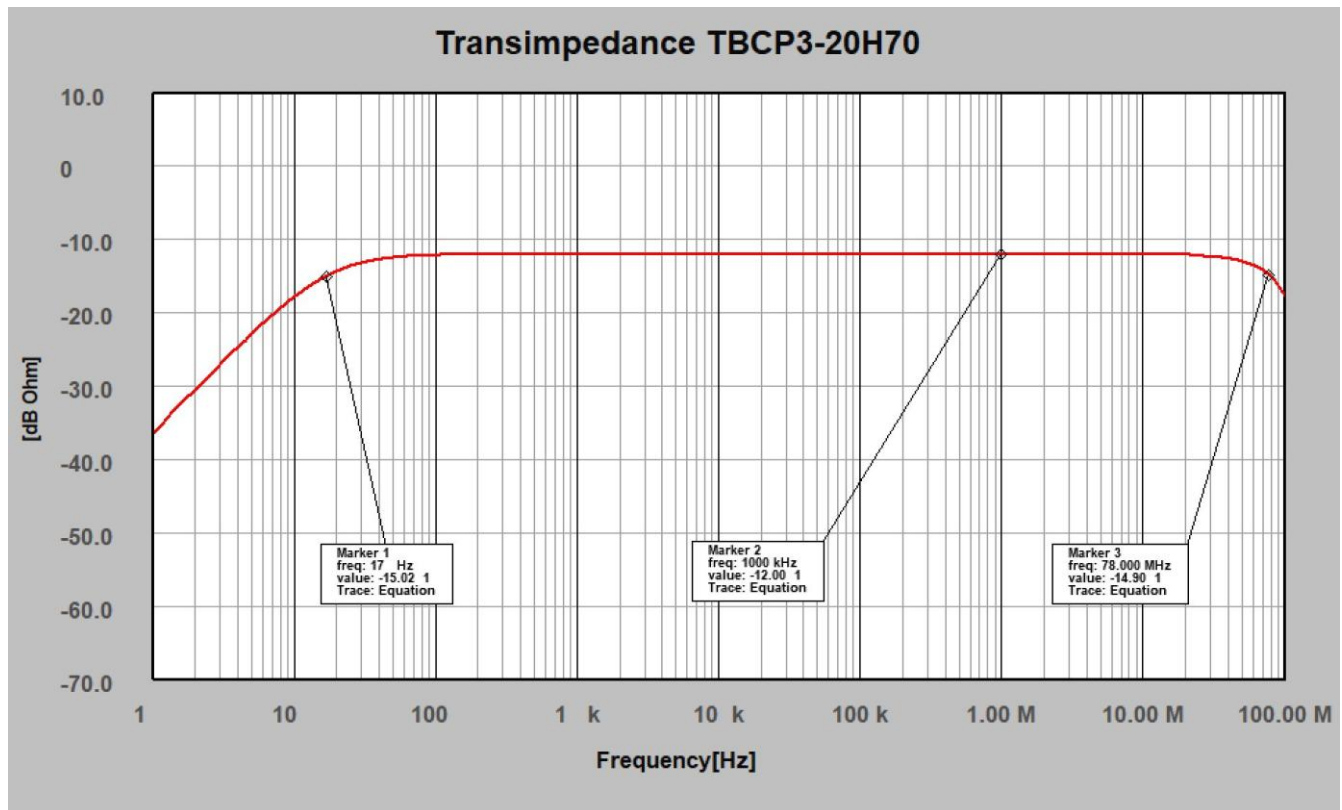


Figure1: typical transfer impedance, 1 Hz – 100 MHz

RF PULSE CURRENT MONITORING PROBE

4 Transfer impedance table

The table below shows typical transfer impedance data of a TBPCP3-20H70 pulse current probe. Each current probe is delivered with its corresponding measurement protocol. The transimpedance is measured with a 50 Ohm load.

Transimpedance [V/A] = $10^{(\text{dBOhm}/20)}$ @ 50 Ohm

Transimpedance [V/A] = $2 \cdot 10^{(\text{dBOhm}/20)}$ @ High Z

Frequency	transfer impedance [dBΩ] 50 Ohm load	transfer impedance [V/A] 50 Ohm load	transfer impedance [V/A] high Z load
1 Hz	-36,70	0,01	0,03
2,5 Hz	-28,70	0,04	0,07
5 Hz	-22,97	0,07	0,14
7,5 Hz	-19,90	0,10	0,20
10 Hz	-17,89	0,13	0,25
25 Hz	-13,65	0,21	0,42
50 Hz	-12,50	0,24	0,47
75 Hz	-12,24	0,24	0,49
100 Hz	-12,15	0,25	0,49
250 Hz	-12,03	0,25	0,50
500 Hz	-12,03	0,25	0,50
750 Hz	-12,01	0,25	0,50
1 kHz	-12,02	0,25	0,50
5 kHz	-12,01	0,25	0,50
10 kHz	-12,00	0,25	0,50
50 kHz	-12,02	0,25	0,50
100 kHz	-12,01	0,25	0,50
500 kHz	-11,99	0,25	0,50
1 MHz	-12,00	0,25	0,50
5 MHz	-11,99	0,25	0,50
10 MHz	-12,01	0,25	0,50
15 MHz	-12,05	0,25	0,50
20 MHz	-12,10	0,25	0,50
25 MHz	-12,25	0,24	0,49
30 MHz	-12,41	0,24	0,48
40 MHz	-12,63	0,23	0,47
50 MHz	-13,05	0,22	0,45
60 MHz	-13,58	0,21	0,42
65 MHz	-13,88	0,20	0,40
70 MHz	-14,23	0,19	0,39
75 MHz	-14,63	0,19	0,37
80 MHz	-15,10	0,18	0,35
85 MHz	-15,65	0,16	0,33
90 MHz	-16,30	0,15	0,31
95 MHz	-17,00	0,14	0,28
100 MHz	-17,73	0,13	0,26


Table1: Transfer impedance: 1 Hz to 100 MHz, typical data



RF PULSE CURRENT MONITORING PROBE


5 Calibration fixture

Tekbox supplies a calibrator suitable for the TBPCP3-20H70 current probe:

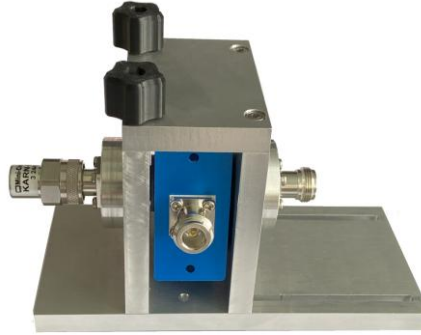

Picture 1: TBPCP3-CAL RF current probe calibration fixture

6 Dimensions

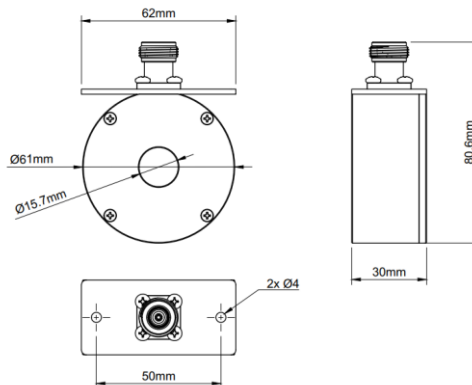

7 Ordering Information

Part Number	Description
TBPCP3-20H70	Pulse Current Probe 20Hz – 70 MHz, N-male to BNC-Female adapter
TBCP3-CAL	Calibration fixture for TBPCP3 series pulse current probes

8 History

Version	Date	Author	Changes
V 1.0	6.7.2025	Mayerhofer	Creation