

## Product Datasheet - Technical Specifications



More information in our Web-Shop at ► [www.meilhaus.com](http://www.meilhaus.com)

### Your contact

Technical and commercial sales, price information,  
quotations, demo/test equipment, consulting:

Tel.: **+49 - (0)81 41 - 52 71-0**

FAX: **+49 - (0)81 41 - 52 71-129**

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

**Meilhaus Electronic GmbH**  
Am Sonnenlicht 2  
82239 Alling/Germany

Tel. **+49 - (0)81 41 - 52 71-0**  
Fax **+49 - (0)81 41 - 52 71-129**  
E-Mail [sales@meilhaus.com](mailto:sales@meilhaus.com)

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

# $\mu$ LC Test System



- ▶ User-friendly interface
- ▶ Functions can be extended with Expansion Boards
- ▶ Prepared for test automation
- ▶ Favorable test setup, consuming low space
- ▶ Simulation of typical automotive interfaces combined in one unit

The new and modern hardware-in-the-loop test system  $\mu$ LC Test System is suitable for mobile application, measuring a compact 17 x 11 x 6 cm. Initial test setup typically takes under ten minutes, since the system allows for a simple test setup. It is a compact open-loop test system for quality assurance of control unit development and combines the simulation of all typical automotive sensors and communication protocols in one unit. Its interface is user-friendly and enables an easy operation and evaluation.

The  $\mu$ LC Test System is especially used for automotive control units with typical interfaces for sensors and bus systems such as analog/digital inputs and outputs, PWM signals, SENT, CAN, LIN and speed sensors.

## Application

### Engine Speed Simulation

- Up to 20,000 rpm
- Supported sensors: Hall, inductive, DG23i, TL4953
- Up to 2 crankshafts, up to 4 camshafts
  - each is independently configurable
  - auxiliary shaft
  - -180 to 180° camshaft adjustment
- Oscilloscope trigger signal for easier monitoring
- Error simulation for engine position management EPM

### Vehicle Busses

- 2 \* CAN, up to 1 MBit/s, switchable 120 Ohm CAN bus terminator
- LIN Master/Slave
- SENT, full J2716 Jan. 2012 standard  
4 Outputs, alternative to PWM output

### Analog Interfaces

- 8 \* 10 bit DAC 0 to 5 V, max. 5 mA  
Internal or external supply

- 4 \* 12 bit DAC 0 to 5 V, max. 5 mA
- 6 \* 12 bit ADC 0 to 40 V, GND reference


### Digital Interfaces

- 6 \* Digital Out, max. 200 mA in total  
Output modes: Ground, 12 V, High impedance
- 2 \* Relays, max. 10 A, separate ECU power supply possible and incl. main relay sensing
- 2 \* PWM input, 1 Hz to 20 kHz
- 4 \* PWM output, max. 90 mA in total,  
0.1 Hz to 20 kHz  
Output voltages: 12 V, 5 V, GND
- Complex PWM with sub signals, each separately adjustable in frequency, duty cycle and pulse count

### Additional Features

- Throttle body simulation
- Cylinder pressure simulation
  - Up to 8 cylinders with one device
  - Expandable with multiple devices
- USB connection completely galvanic decoupled
- All in- and outputs short-circuit protected and ESD protected
- EMC tested
- Expansion boards for additional HW features
- Multi device support with sync option for engine speed signals


### Test Setup

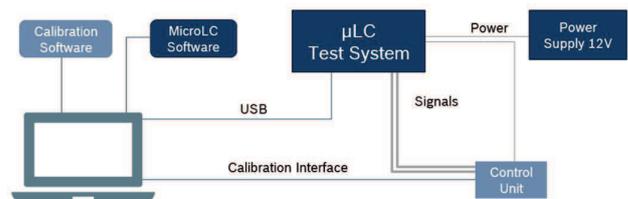

Note: Calculation intensive modules like cylinder pressure simulation can cause a limitation of e.g. the max. engine speed.

### Technical Specifications

Operating voltage	12 V DC
Current consumption	typ. < 1 A
ECU voltage	12 V / 24 V DC
ECU current	10 A
Permissible operation temperature	0 to 40°C
Housing material	Aluminum
Dimensions	175 x 107 x 61 mm
Weight	690 g

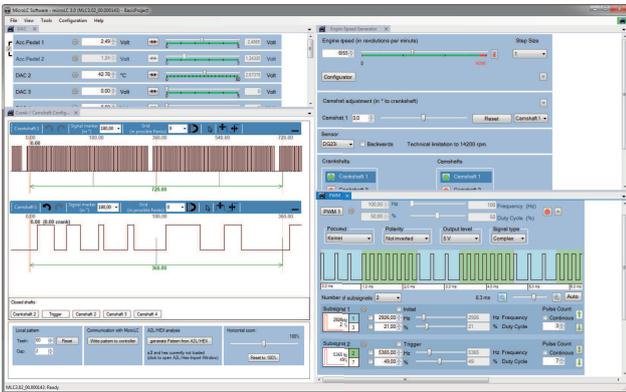

The screenshot shows the MicroLC Software with analog outputs, crank-/ camshaft, RPM and complex PWM.

### Update and Support Subscription

- Free in the first year of use, chargeable from the second year

### Legal Restrictions

The sale of this product in Mexico is prohibited.

### Ordering Information

#### $\mu$ LC Test System

Order number **F02U.V02.303-02**

#### Software Options

#### Update and Support Subscription

Order number **F02U.V02.838-01**

#### Accessories

#### Expansion Board CAN-FD

Order number **F02U.V03.095-01**

#### Expansion Board Current Loop Interface

Order number **F02U.V02.889-01**

#### Expansion Board Digital Multichannel Potentiometer

Order number **F02U.V03.129-01**

#### Expansion Board Digital Outputs

Order number **F02U.V02.904-01**