


## **Product Datasheet - Technical Specifications**

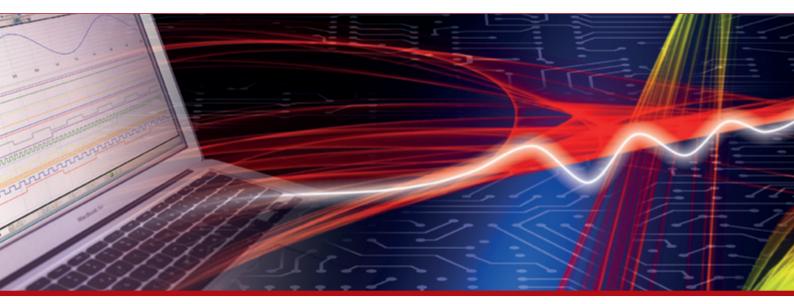

More information in our Web-Shop at ▶ www.meilhaus.com

#### Your contact

Technical and commercial sales, price information, quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

FAX: +49 - (0)81 41 - 52 71-129

E-Mail: sales@meilhaus.com

# **\$FLIR**®

## **Thermocouple Probe with Adapter**

### **P/N: TA60**

#### Copyright

© 2020, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

#### **Document identity**

Publ. No.: TA60 Commit: 64533 Language: en-US Modified: 2020-03-17 Formatted: 2020-03-18

#### Website

http://www.flir.com

#### **Customer support**

http://support.flir.com

#### Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



Part number	TA60
Part description	Thermocouple Probe with Adapter

- Type K thermocouple temperature sensor.
- Can be used to measure temperature with many meters.
- Fast responding with a wide general-purpose measurement range.
- Safety-shrouded banana to banana connection.
- 2 year warranty

Specifications		
Temperature range	-40 to 1200°C (-40 to 2192°F)	
Meter data		
Suitable main unit	DM93, CM78 (DM92)	
Warranty	https://www.flir.com/testwarranty	
Certifications		
Certifications	ITS-90 (JIS C-1602-1995 Class 2)	
Meter physical data		
Weight	0.06 kg	
Dimensions $(H \times W \times L)$	15.24 cm × 3.81 cm × 1.27 cm	



## **Thermocouple Probe with Adapter**

P/N: TA60

© 2020, FLIR Systems, Inc. #TA60; r. 64533; en-US

Meter physical data		
Material	ABS plus PC, bronze (nickel plated), PVC	
Color	Black and yellow	
Shipping information		
Packaging type	Color box	
Packaging contents	Manual, TA60	
Packaging weight:	0.08 kg	
Packaging dimensions (H × W × L)	7 .62 cm × 2.54 cm × 16.83 cm	
Carton weight	4 kg	
Carton dimensions	14.5" × 13" × 8"	
Carton quantity	48	
EAN-13	0793950377604	
UPC-12	793950377604	
Country of origin	Taiwan	
Tariff code	9030908822	
Technical support		
Website	http://support.flir.com	

#### Compatible with the following products:

- CM44; FLIR CM44: Professional 400A TRMS AC Clamp Meter + Type K
- CM65; FLIR CM65: True RMS 600A Solar Clamp Meter with METERLINK
- CM78; FLIR CM78: True RMS Clamp/DMM with infrared thermometer and Bluetooth METERLINK
- CM94; FLIR CM94: True RMS AC/DC 2000A Utility Clamp Meter with LoZ
- DM166; FLIR DM166: Thermal Imaging TRMS Multimeter with IGM
- DM284; FLIR DM284: Imaging Multimeter with IGM
- DM285; FLIR DM285: Industrial Thermal Imaging Multimeter with Datalogging, Wireless Connectivity, and IGM
- DM64; FLIR DM64: HVAC TRMS Digital Multimeter with Temperature
- DM66; FLIR DM66: Electrical and Field Service TRMS Multimeter with VFD Mode
- DM90; FLIR DM90
- DM91; FLIR DM91: Industrial TRMS Multimeter with Datalogging and Wireless Connectivity
- DM92; FLIR DM92: Industrial Digital Multimeter with LoZ and VFD Mode
- DM93; FLIR DM93: True RMS Industrial Multimeter
- TG56; FLIR TG56: Spot IR Thermometer with Thermocouple