

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com and in our download section.

Your contact

**Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:**

Tel.: **+49 - 81 41 - 52 71-0**

FAX: **+49 - 81 41 - 52 71-129**

E-Mail: sales@meilhaus.com

Downloads:

www.meilhaus.com/en/infos/download.htm

Meilhaus Electronic GmbH | Tel. **+49 - 81 41 - 52 71-0**
Am Sonnenlicht 2 | Fax **+49 - 81 41 - 52 71-129**
82239 Alling/Germany | E-Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.
© Meilhaus Electronic.

www.meilhaus.de

iLog Voltage Data Logger

Product Specifications



OVERVIEW

The iLog Voltage Data Logger is low cost, high accuracy, battery powered, stand-alone voltage data logger. The logger records up to 4 mega-byte of data and stores them in non-volatile flash memory for later retrieval.

Input voltage signal can be from sensors, transducers, transmitters or any other common voltage sources.

Its aluminum enclosure makes it excellent in the harshest industrial environment. Plug & Play USB port and versatile custom equation simplify communications and engineering unit conversion.

16-bit ADC makes it well suited for science and laboratory applications where precise and accurate measurements are critical.

Simply plug the logger to computer's USB port, and the software automatically recognizes it and handles the configuration, downloading, graph viewing and more...

FEATURES

High Data Resolution:

The 16-bit analog-to-digital converter meets most high-resolution requirements.

Large Memory Size:

The 4-Mega-Byte Memory stores years of measurements.


Free Upgrade of Software:

Both firmware and PC software are free for upgrade by couple of mouse clicks, keeping the logger and software always up-to-date with new features and bug fixes.

Multiple Communication Ports:

The iLog data loggers can be accessed via USB, Serial Port, MODEM, or Ethernet connections with auto baud rate of up to 115 kbps.

Its on-board TTL serial port and USB interfaces meet most communication requirements.

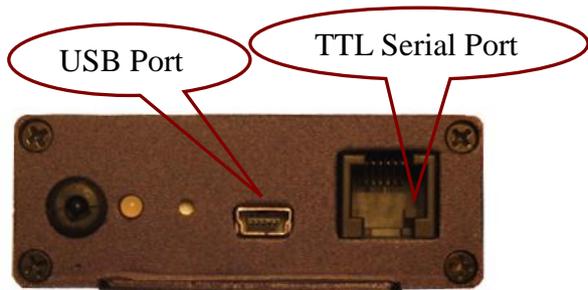

12-Year Battery Life:

The internal lithium battery provides over 12 years of instantaneous logging operation when sampling at an interval of one minute.

Fast Sampling Mode:

The iLog data loggers can log data with the sampling interval as fast as 20 milliseconds, replacing data acquisition devices.

Alarm and Excitation Output:

The iLog data logger notifies the alarm condition over alarm terminal strips or communication lines. (USB, Serial Port, MODEM)

Excitation control turns on the power of external transmitter/transducer only when the logger is sampling.



Rugged Physical Design:

The rugged aluminum enclosure makes the iLog data loggers perfect in the harshest industrial environment.



SITEVIEW SOFTWARE FEATURES

SiteView is a Windows-based application which works with iLog Series data loggers for downloading, configuration, data analyzing and plotting.

Its user-friendly graphic interface plus powerful functionalities fit both novice and advanced users.

Besides basic data logger configuration, downloading, SiteView includes other powerful features like:

- ❖ Multiple Communications Interfaces: USB, Serial Port, Ethernet...

- ❖ Custom Equation Editor with C# language meet any complicated measurement requirements
- ❖ Multiple Data Views and Custom Formatting of Axis, Line, Annotation & Comments.
- ❖ Real-Time Chart View/Recording and User Calibration
- ❖ Export to CSV, TEXT, BMP, JPG, TIF, PNG, GIF file format.

The screenshot displays the SiteView by Microedge Instruments software interface. The main window shows the 'Site-Log LPVB-1 (S/N: 010701000649)' configuration page. The interface includes a menu bar (File, View, Tools, Help), a toolbar with options like 'Unit Category', 'Equation', 'Custom-Line Equation', 'Plot Preferences', 'Special characters', and 'USB D'. The main area is divided into several sections:

- Contact Scan:** Shows the device name 'Site-Log LPVB-1 (S/N: 010701000649)' and 'USB:24 Properties' with 'Baud Rate: 115200 Bits/second' and 'Timeout: 5000 Milliseconds'.
- General:** Includes a 'Real-Time' button, 'Refresh', 'Download', 'Clear', and 'Config' buttons. A checkbox for 'LED light when sampling' is present.
- Description:** 'New Logger', 'Sampling Interval: 1 Minute', 'Start Time: 6/29/2013 11:19:52 PM', and 'End Time: 6/29/2013 11:22:52 PM'.
- Logging Method:** 'Overwrite oldest data w', 'Total Memory: 2095104 Readings', and 'User Selected Memory: 2095104 Readings'.
- Used M:** '7600 R'.
- Equation Editor:** A text area containing C# code for calculating dew point based on temperature and relative humidity.

Overlaid on the main window are several callout boxes highlighting specific features:

- Real-Time View:** A small window showing a real-time graph of temperature data with a large digital display showing '[0] 25.34 °C'.
- Configuration Dialog:** A dialog box for setting logging parameters such as 'Time To Start', 'Time To End', 'Sampling Interval', and 'Unit System'.
- Graph View:** A larger window showing a detailed line graph of temperature data over time.
- Equation Editor:** A window showing the C# code used for data processing.
- Tabular View:** A window displaying a table of logged data points.

Time	#0: CH0 [°C]	#1: CH1 [mV]	#2: CH2 [mV]
6/29/2013 11:19:52 PM	24.27	0.610	0.305
6/29/2013 11:20:52 PM	24.40	0.610	0.305
6/29/2013 11:21:52 PM	24.37	0.610	0.305
6/29/2013 11:22:52 PM	24.25	0.610	0.305

```

double DewPointEquation(double Input)
{
    double logEx = Math.Log(Input);
    double temperature = Channels[0].Measurement;
    double rh = Channels[1].Measurement;
    double dew_point = DewPoint(temperature, rh);
    return dew_point;
}

```

SPECIFICATIONS

Product Identification	
Product Name	iLog Voltage Data Logger
Model	iVDC-10
Inputs	
Connections	Pluggable terminal block voltage input, alarm and excitation control outputs.
Channels	One on-board thermistor temperature (-40°C ~ 70°C, -40°F ~ 158°F). One 10VDC voltage channel
Resolution	0.0018%
Accuracy	Internal thermistor channel: ± 0.2°C(0°C ~ 70°C, 32°F ~ 158°F) External thermistor channels: ± 0.05% @ 25°C
Input Impedence	>1 MOhms
Over-voltage protection	up to -3VDC ~ +40VDC
Alarms	
Channel Alarms	Two editable alarm thresholds per channel.
Alarm Outputs	ALARM1 & A2/EXT terminal strips can be configured as alarm outputs. Alarm-On: MOSFET(N-Channel) switch on. Alarm-Off: MOSFET(N-Channel) switch off. Max Power: 200mA @ 24VDC. With purchase of SiteView software, the Site-Log can report alarm status to host PC via USB, Modem or Ethernet Device Server.
Alarm-On Delay:	Programmable 0 - 10 minutes delay with 1-minute increments.
Alarm Indicator	On-board LED lights in red when in alarm condition.
On-board Memory	
Capacity	4 Mega bytes (2 Mega measurements).
Data Retention	Over 20 years.
Sampling & Logging	
Sampling Interval	20 milliseconds to 12 hours user selectable.
Logging Mode	Stop recording or FIFO when memory is full.
Logging Activation	Programmable instant, start delay or field push-button activation.
Communications	
Interface	USB(USB cable included). AUX(RJ11) for direct TTL level communications. With purchase of Site USB DeviceServer, the Site-Log logger can be connected to Ethernet for remote access.
Baud Rate	Auto-detect baud rate from 2400 to 115200 bps on both USB and AUX ports.
Battery	
Power	Built-in 3.6V Lithium Battery.
Life Cycle	12 years based on 1 minute sampling interval
Software	
Site View (Sold Separately)	Configuration, downloading, plotting, real-time view, custom calibration and custom equation.

Software Requirements	Computer with 1.0 GHz or faster processor 256 MB Memory or higher 1.0 GB of available hard-drive space or higher Windows XP with SP2 or later, Vista, Window 7 At least one USB port or one COM port
Physical	
Material	Aluminum enclosure.
Dimension	88 X 64.2 X 24 mm (3.46 X 2.53 X 0.95 inches)
Weight	200g.
Mounting	Probe/Wall-mount holes for hanging/mounting.
Others	
LED Indicator	Tri-Color LED: (can be disabled for power saving) Normal Sampling: green when sampling Alarm: red when sampling Low Battery: amber when sampling.
Excitation Control	A2/EXT terminal strip can be configured as excitation control output for driving the power of connected devices. Warm-up delay Interval settings: 10 to 240 seconds with 10-second increments.
Operating Environment	-40 ~ +70°C (-40°F ~ 158°F), 0~95%RH non-condensing.
Clock Accuracy	± 1 minute per month.
Approvals	CE, FCC

LOGGING CAPACITY TABLE

Sampling Interval	Logging Capacity	Sampling Interval	Logging Capacity
1 minute	727 days	1 second	12 days
10 seconds	121 days	100 ms	28 hours

ORDERING INFORMATION

Model	Description
iVDC-10	iLog Voltage Data Logger