

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com and in our download section.

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: **+49 - 81 41 - 52 71-0**

FAX: **+49 - 81 41 - 52 71-129**

E-Mail: sales@meilhaus.com

Downloads:

www.meilhaus.com/en/infos/download.htm


Meilhaus Electronic GmbH | Tel. **+49 - 81 41 - 52 71-0**
Am Sonnenlicht 2 | Fax **+49 - 81 41 - 52 71-129**
82239 Alling/Germany | E-Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.
© Meilhaus Electronic.


www.meilhaus.de

Isolated Transmitters: 600T Series

657T, 658T Multi-Channel, Two-Wire Transmitters

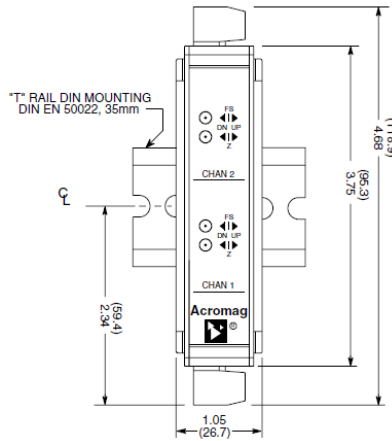

NOTE: ALL DIMENSION ARE IN INCHES (MILLIMETERS)

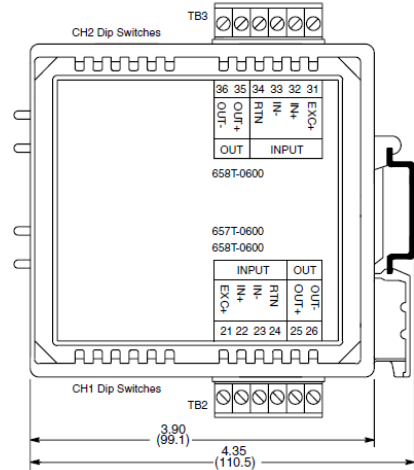

RTD / resistance input ♦ Single/dual channel loop-powered transmitter

Description

Models

657T: Single RTD input channel
658T: Dual RTD input channels

These units accept universal RTD or resistance input signals and output proportional DC current signals. The output can also be linearized to the input sensor signal. Single-channel 657T and dual-channel 658T units are ideal for panel shops and end-users who require a high-density signal conditioner that can accommodate a broad range of temperature measurement applications.

Configuration is fast and easy. First, you select the input type with a simple DIP switch. Then, you set your zero/full-scale output values using a toggle switch on the front panel to increase or decrease the signal until you read the desired output value on your voltmeter. The toggles make it easy to calibrate a normal (proportional) or reverse-acting (inverse) response in seconds. After completing the calibration, just press the mode/set toggle and your configuration settings are safely saved to nonvolatile memory.

Input Ranges

RTD: 100 ohm Pt, 120 ohm Ni, 10 ohm Cu
Resistance: 0 to 500 ohms

Output Range

4 to 20mA DC

Power Requirement


12 to 50V DC (loop-powered)
Two-wire transmitter

Approvals


UL, cUL listed
Class I; Division 2; Groups A, B, C, D

Key Features & Benefits

- Selectable RTD input types offer flexibility to fit many applications.
- DIP switch-configuration and self-ranging technologies speed installation without pots, jumpers, or software.
- Toggle-switch calibration simplifies field adjustments for faster and easier maintenance.
- Configuration lockout safety feature prevents tampering and accidental changes.
- Reverse-acting output capability enables inverse proportional control signals.
- Dual channel model saves space and reduces equipment costs.
- High-resolution Σ - Δ A/D converters deliver superior accuracy for reliable measurements.
- Lead break detection supports upscale or downscale failsafe mode.

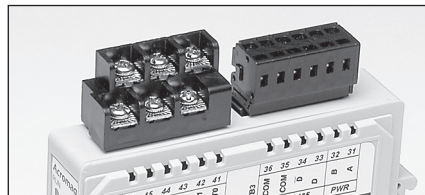

Optional terminal blocks: barrier strip (left) and spring clamp (right). Cage clamp terminal is standard.

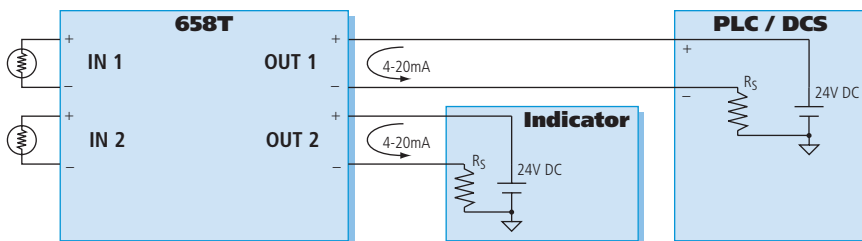

Isolated Transmitters: 600T Series



Performance Specifications

◆ General Input

Analog to Digital Converter (ADC)
16-bit S-D A/D converter

Noise Rejection

Normal Mode: Better than 40dB @ 60Hz
Common Mode: Better than 100dB @ 60Hz

Input Overvoltage Protection

Bipolar Transient Voltage Suppressors (TVS)

Input Impedance

400K ohm at 10mV span;
input current, $\pm 25\text{nA}$, typical ($\pm 30\text{nA}$, max.)

◆ RTD Input

RTD Input Ranges

100 $\Omega\mu\text{s}$, 120 Ω Ni, or 10 Ω Cu; user-configured.

RTD	°C Range (°F Range)	Accuracy
Pt1	-200 to 850°C (-328 to 1562°F)	$\pm 0.25^\circ\text{C}$
Pt2	-200 to 850°C (-328 to 1562°F)	$\pm 0.25^\circ\text{C}$
Ni	-80 to 320°C (-112 to 608°F)	$\pm 0.25^\circ\text{C}$
Cu -	200 to 260°C (-328 to 500°F)	$\pm 1.00^\circ\text{C}$

Alpha: Pt1 ($\alpha = 1.3850$), Pt2 ($\alpha = 1.3911$),
Ni $\alpha = 1.6720$, Cu ($\alpha = 1.4272$)

2, 3, or 4-wire configurations supported. Module provides sensor excitation, linearization, lead-wire compensation, and sensor break detection.

RTD Excitation Current

0.5mA DC typical, all types

RTD Lead-Wire Compensation

25 ohms per lead

RTD Break Detection

Configurable for either upscale or downscale

◆ Resistance Input

Resistance Input Range
0 to 500 ohms

Resistance Accuracy
 ± 0.05 ohms

◆ Output

Output Range

Range: 4 to 20mA DC, 3.8 to 22mA range typical

Output Compliance

$R_{\text{load}} = (V_{\text{supply}} - 12\text{V}) / 0.02\text{A}$

Output Response Control

Proportional/inverse selectable

Ambient Temperature Effect

Better than $\pm 0.006\%$ of input span per $^\circ\text{C}$ or $\pm 100\text{ppm}/^\circ\text{C}$, whichever is greater

Output Response Time (for input step change)

700mS typical to 98% of final output value

◆ Environmental

Ambient Temperature

Operating: -25 to 75°C (-13 to 167°F)

Storage: -40 to 85°C (-40 to 185°F)

Relative Humidity

5 to 95%, noncondensing

Power Requirement

12 to 50V DC @ 25mA for each output channel

Isolation

Not isolated

Radiated Field Immunity (RFI)

Complies with EN61000-4-3 Level 3 and EN50082-1

Electromagnetic Field Immunity (EMI)

Less than $\pm 0.25\%$ of output span effect

Electrical Fast Transient (EFT)

Complies with EN61000-4-4 Level 3 and EN50082-1

Electrostatic Discharge (ESD)

Complies with EN61000-4-2 Level 3 and EN50082-1

Radiated Emissions

Meets or exceeds EN50081-1 for Class B equipment

Approvals

UL & cUL listed

Hazardous Locations: Class I: Div. 2; Groups A, B, C, D

◆ Physical

Enclosure

Case: Self-extinguishing NYLON type 6.6 polyamide thermoplastic UL94 V-2 NEMA Type 1 enclosure

Connectors (Removable Terminal Blocks)

Wire Range: AWG #12-24

Printed Circuit Boards

Military grade FR-4 epoxy glass circuit board

Dimensions

1.05W x 4.68H x 4.35D inches

26.7W x 118.9H x 110.5D millimeters

Shipping Weight

1 pound (0.45 Kg) packed

Ordering Information

◆ Models

[657T-0600](#) (add "-C" for factory calibration)

Single channel RTD 2-wire transmitter

[658T-0600](#) (add "-C" for factory calibration)

Dual channel RTD 2-wire transmitter

Add "-C" suffix for optional factory configuration

◆ Accessories (see Page 21)

[PS5R-VD24](#)

Power supply (24V DC, 2.5A)

[TBK-B01](#)

Optional terminal block kit, barrier strip style, 2 pcs

[TBK-S01](#)

Optional terminal block kit, spring clamp style, 2 pcs

[DIN RAIL 3.0](#)

[DIN RAIL 16.7](#)





DIN rail strip, Type T, 3 inches (75mm) or

16.7 inches (425mm)

[20RM-16-DIN](#)

19" rack-mount kit with DIN rail

Holds sixteen 650T transmitters

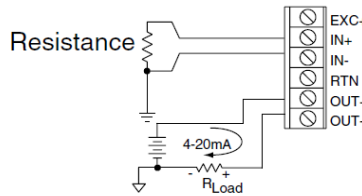

Acromag
THE LEADER IN INDUSTRIAL I/O