



Product Datasheet - Technical Specifications



More information in our Web-Shop at ▶ www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

FAX: +49 - (0)81 41 - 52 71-129

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. +49 - (0)81 41 - 52 71-0
Fax +49 - (0)81 41 - 52 71-129
E-Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

www.meilhaus.com



IT-M3900B

Regenerative Power System



Your Power Testing Solution

IT-M3900B

Regenerative power system



The IT-M3900 series combines four series of DC power supplies, bi-directional power supplies, regenerative power system and regenerative electronic load. It continues the ultra high power density design of M series, with a maximum power of 6kW, current of 510A and voltage up to 1500V in 1U, comfortable system scalability, and a small physical size could save extra space and fully meet the stringent requirements of various requests with the multi-functional, high energy-saving, high safety and high stability product design.

IT-M3900B regenerative power system feature two-in-one, which could use as a bidirectional DC power supply, also act as an independent regenerative load. One-button-switch between source and load mode, a unique and decisive feature for the user groups that works in different applications such as battery, energy storage, electric vehicle, Green energy and some ATE fields.

Application

Industrial power supply modules

Inverters, Emergency power supply modules, Bidirectional DC-DC, Rectifier

Electric Vehicles


BOBC, DC-DC Modules, Automotive Electronic Devices

Small/Medium Power Motors

Drones, Power tools, Electric Motorbikes

5G communication and data center

UPS, UPS inverter unit, HVDC power supply



Your Power Testing Solution

IT-M3900B regenerative power system

Voltage	Model	Current	Power	Current	Power	Size		
10V	IT-M3901B-10-170	source	-120~170A	-1200~1700W	load	2~120A	6~1200W	1U
	IT-M3903B-10-340		-240~340A	-2400~3400W		4~240A	12~2400W	1U
	IT-M3905B-10-510		-360~510A	-3600~5100W		6~360A	24~3600W	1U
	IT-M3910B-10-1020		-720~1020A	-7200~10200W		12~720A	48~7200W	2U
32V	IT-M3902B-32-80	source	±80A	±2kW	load	80A	2kW	1U
	IT-M3904B-32-160		±160A	±4kW		160A	4kW	1U
	IT-M3906B-32-240		±240A	±6kW		240A	6kW	1U
	IT-M3912B-32-480		±480A	±12kW		480A	12kW	2U
80V	IT-M3902B-80-40	source	±40A	±2kW	load	40A	2kW	1U
	IT-M3904B-80-80		±80A	±4kW		80A	4kW	1U
	IT-M3906B-80-120		±120A	±6kW		120A	6kW	1U
	IT-M3912B-80-240		±240A	±12kW		240A	12kW	2U
300V	IT-M3902B-300-20	source	±20A	±2kW	load	20A	2kW	1U
	IT-M3904B-300-40		±40A	±4kW		40A	4kW	1U
	IT-M3906B-300-60		±60A	±6kW		60A	6kW	1U
	IT-M3912B-300-120		±120A	±12kW		120A	12kW	2U
500V	IT-M3902B-500-12	source	±12A	±2kW	load	12A	2kW	1U
	IT-M3904B-500-24		±24A	±4kW		24A	4kW	1U
	IT-M3906B-500-36		±36A	±6kW		36A	6kW	1U
	IT-M3912B-500-72		±72A	±12kW		72A	12kW	2U
800V	IT-M3902B-800-8	source	±8A	±2kW	load	8A	2kW	1U
	IT-M3904B-800-16		±16A	±4kW		16A	4kW	1U
	IT-M3906B-800-24		±24A	±6kW		24A	6kW	1U
	IT-M3912B-800-48		±48A	±12kW		48A	12kW	2U
1500V	IT-M3906B-1500-12	source	±12A	±6kW	load	12A	6kW	1U

* The above specifications are subject to update without notice

Your Power Testing Solution

IT-M3900B regenerative power system

FEATURE

- 2 in 1 unit - a bidirectional power supply and a regenerative load
 - One button switch between source and load on front panel
 - Compact design, 1U@6kW, 2U@12kW
 - Voltage range: 10~1500V
 - Current range: -720A~1020A
 - Power range: $\pm 12\text{kW}$
 - Bidirectional energy flow between the DUT and the grid, current seamless switching
 - Master/slave parallel connection with patented technology - keep good performance while power extension^{*1}
 - Efficient power regeneration - reduce cost of electricity and cooling
 - CC/CV priority
 - Adjustable output impedance


*1 If 111 models>16, 211 models>8, pls. contact ITECH

*2 Not available for 10V models.

One button switch, bidirectional and regenerative

Different from other bidirectional power supplies, IT-M3900B series is a regenerative power system which combines two devices into a 1U unit. It is both a bidirectional DC power supply and also a regenerative DC electronic load. You can switch between Source and Load with one button on the front panel. IT-M3900B not only saves space and equipment purchasing cost for you, but also enables you to connect DUT easily.

- Battery simulation
 - Partial pre-compliant with LV123, LV148, DIN40839, ISO-16750-2, SAEJ1113-11, LV124 and ISO21848 automotive testing standards*2
 - Slope of voltage, current and power is settable
 - Simulation of dynamic driving conditions, up to 10 million points
 - 8 operation modes under Source mode: CC/CV/CW/CR/C- C+CV/CV+CR/CR+CC/CC+CV+CW+CR
 - Multiple protection: OVP / ±OCP / ±OPP / OTP / voltage transient drop protection/anti-islanding/power grid detection/pre-charge
 - Built-in USB/CAN/LAN/digital IO interfaces, Optional GPIB/Analog&RS232

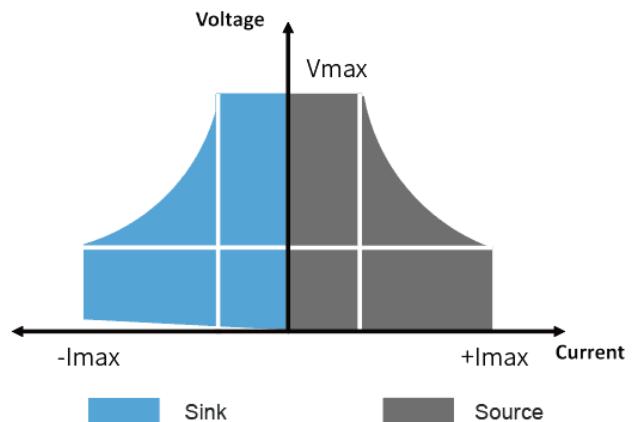



It can switch seamlessly between source and sink mode fast and continuously, which avoids voltage or current overshoot effectively. IT-M3900B can be well applied to battery test, cell packaging equipment test, battery protection board test, etc.

Your Power Testing Solution

IT-M3900B regenerative power system

Wide range output

There are 25 models included in IT-M3900B series. The output voltage ranges from 10V to 1500V and the maximum output current of a single unit can reach 1020A. The wide-range output design provides more voltage and current combinations than conventional fixed-range output DC power supplies, which is more flexible. Just a single unit can cover a wide range of applications which makes it easy to build power systems and largely save room for you at the same time.

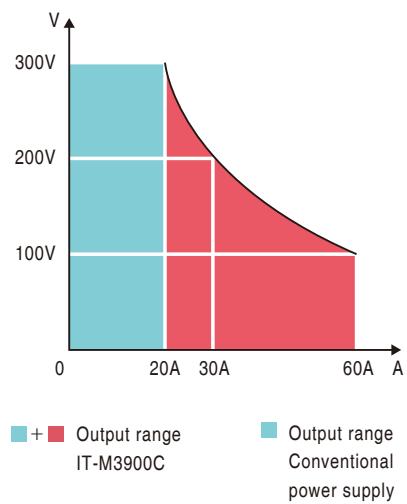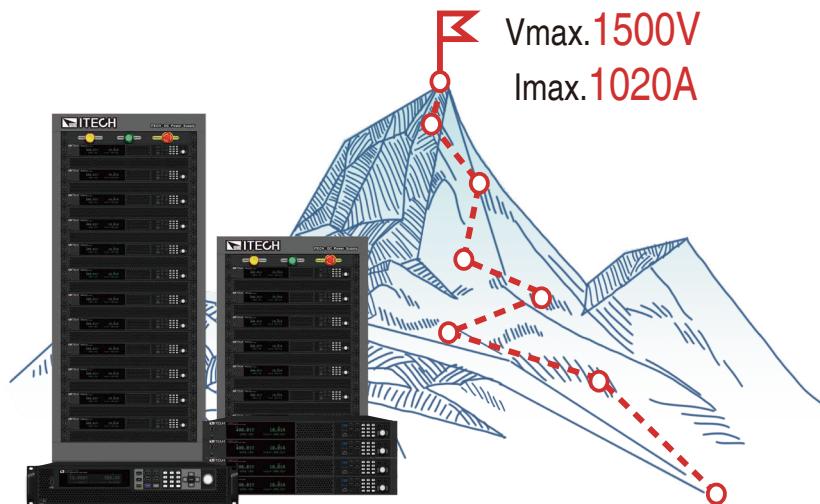

CC & CV priority

CV & CC priority helps customers effectively and flexibly solve their various tough problems in test applications request for high speed and no over-shoot power supplies. Customers can select CV or CC priority to adjust the speed of the loop circuit, to decide output with the high-speed voltage or current with no overshoot. It is applicable for high-power integrated circuit test, charging/ discharging test and the transient simulation/ characteristic test of automotive electronics.


Battery charge/discharge Testing

IT-M3900B series are with unique bidirectional design, variable output impedance, and four working modes of CC/CV/CP/CR under load mode, so it can simulate battery charging and discharging characteristics, set various testing conditions and process testing data, so as to be applicable for charging and discharging testing for various kinds of portable batteries. IT-M3900B series are with unique bidirectional design, variable output impedance, and four working modes of CC/CV/CP/CR under load mode, so it can simulate battery charging and discharging characteristics, set various testing conditions and process testing data, so as to be applicable for charging and discharging testing for various kinds of portable batteries.

With optional ITS5300 battery testing software,

it can do the below testing items:

- Road conditions simulation
- Charging & discharging characteristics testing
- Cycle life testing
- Consistency testing
- DCIR testing
- Temperature testing
- Capacity testing
- Life testing
- Reliability testing
- Overcharge/over discharge endurance testing

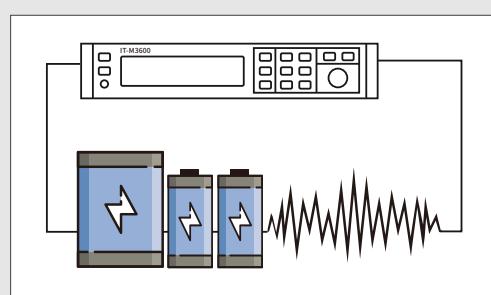

Your Power Testing Solution

IT-M3900B regenerative power system

Power regenerative and eco-friendly

With the power regeneration function, IT-M3900B can feed back up to 95% power instead of consuming it as heat. It not only save your cost of electricity, HVAC and cooling infrastructure, but also help to reduce carbon emission and impact on the environment. In addition, IT-M3900B has the function of automatic grid detection, which can detect phase voltage and frequency in real time and synchronizes with the grid to make energy regeneration automatic and safe.

Production facility : 24Hr/day x 7 work days x 52 weeks

R&D lab : 8Hr/day x 5 work days x 52 weeks

Power	Electricity cost saved (appr. USD/year)	CO ₂ emission reduced (appr. ton/year)
6 kW	6,971	50
12 kW	13,943	99
36 kW	41,828	298
96 kW	111,541	794


Power	Electricity cost saved (appr. USD/year)	CO ₂ emission reduced (appr. ton/year)
6kW	1,747	12
12 kW	3,494	24
36 kW	10,483	71
96 kW	27,955	189

* The data is based on :

1. approximate electricity price 0.14USD/kWh for industry facility in California


2. 1kWh power consumption ≈ 0.997 CO₂ emission

* The extra cost of air conditioning is not included.

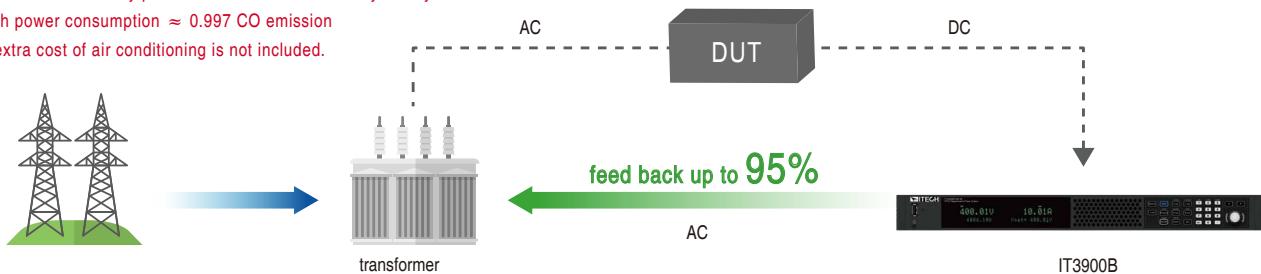

Pre-compliant with multiple standards for EV component testing

Power transients often happen during vehicle start-up and driving. To make sure that the automotive electronic components can withstand it, it's necessary to simulate the worst conditions during the test. IT-M3900B has built in partial voltage curves of pre-compliant standard, including LV123, LV148, DIN40839, ISO-16750-2, SAEJ1113-11, LV124 and ISO21848. Users can easily recall various waveforms directly. You don't need to program by yourself or purchase any additional software.

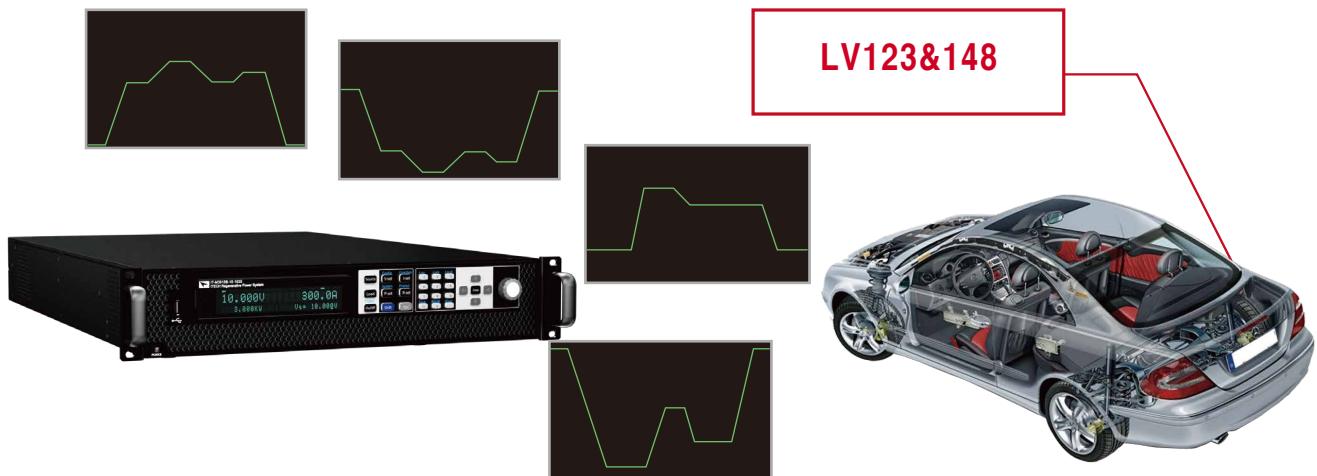


Your Power Testing Solution

IT-M3900B regenerative power system

Battery simulation function


IT-M3900B unique bidirectional design and variable output impedance makes it easy for the users to set voltage/capacity/internal resistance/SOC quickly to define battery matrix quickly from the front panel, to simulate the charge/discharge characteristics of battery and assist with other tests. ITECH provides optional BSS2000 battery simulation software, then users can self-define the battery curve by setting common parameters, also can set battery initial capacity to verify the DUT characteristics under different battery status. Meanwhile, BSS2000 supports importing matlab battery matrix or CSV. file with battery charging and discharging curve, so as to simulate real battery charge and discharge characteristics.

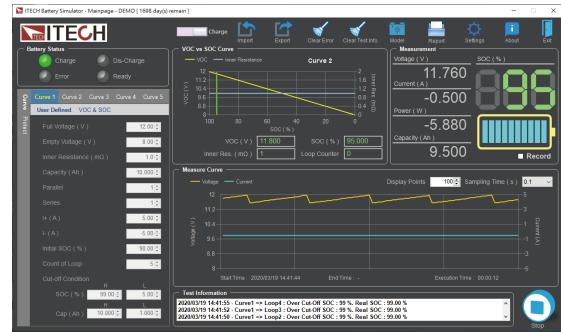


BSS2000 battery simulation software interface

Multiple operation modes


IT-M3900B provide CC/CV/CW/CR modes under source/load mode.

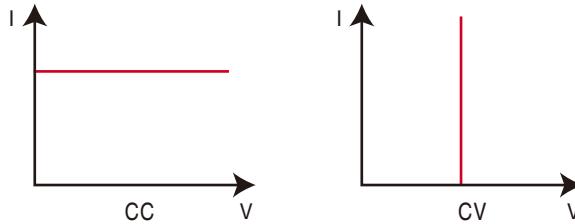


IT-M3900B also provide CC+CR/CV+CR/CV+CC/CC+CV+CW+CR four complex modes under Load mode, adapt to multiple applications.




CC+CR mode can be applied to OBC feature test of voltage limit, feature test of current limit, constant voltage accuracy test, constant current accuracy test, to prevent over current protection.



CV+CC mode can be applied to simulate battery, test charging station or car charger, the maximum loading current is limited when the CV is working.

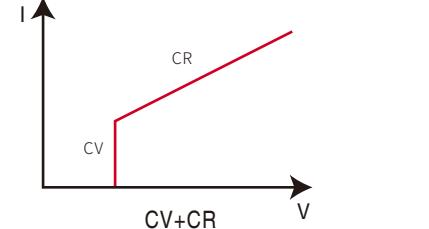

CV+CR mode can be applied to simulate LED light, test LED power , LED current ripple parameters.


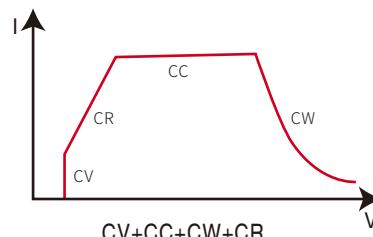


CV+CC+CW+CR mode can be applied to test lithium-ion battery charger, to gain complete V-I charging curve. In addition, when protection circuit of DUT is damaged, it can auto switch to avoid damage.

Your Power Testing Solution

IT-M3900B regenerative power system

Multiple interfaces

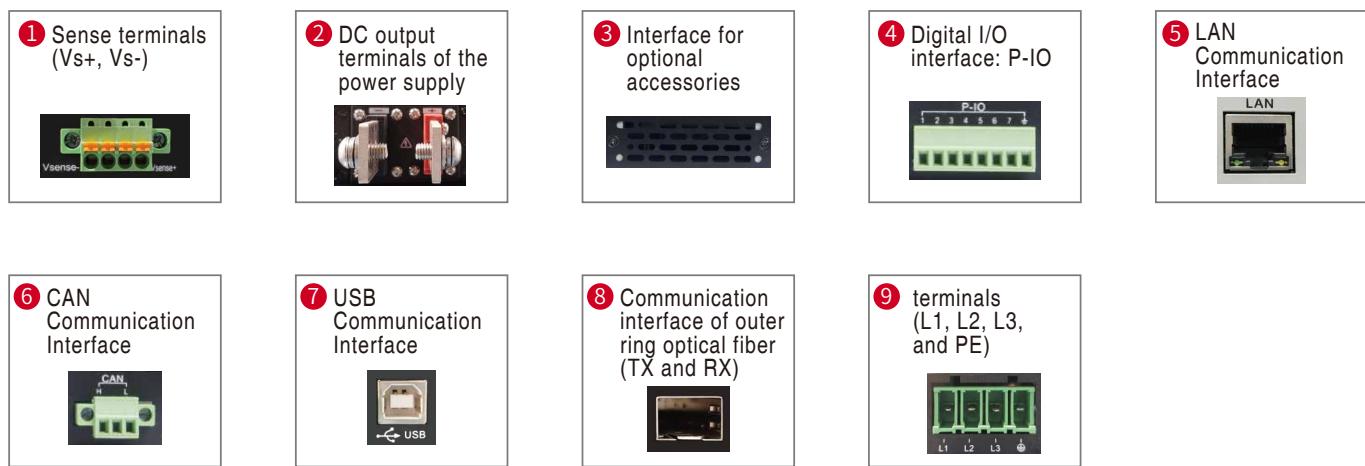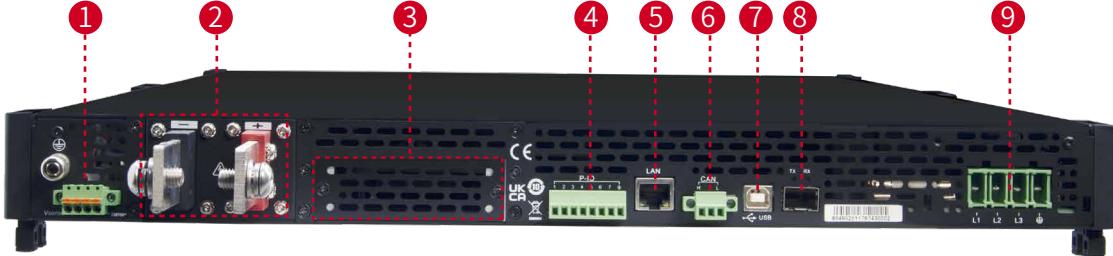

Optional Accessories

Category	Model	Specification	Description
Parallel kit	IT-E4029-15U	IT15U cabinet	800mm×550mm X907.6mm
	IT-E4029-27U	IT27U cabinet	800mm×600mm×1362.75mm
	IT-E4029-37U	IT37U cabinet	800mm×600mm×1764.35mm
	IT-E168	Optical fiber cable kit	Used for parallel connection between the units in a cabinet
	IT-E155A/B/C	Cabinet rack mount Kit	Cabinet rack mount installation
Functional Module	IT-E165A-250 *1	Anti-reverse protection unit 750V/250A	avoid reverse connection
	IT-E165A-400 *1	Anti-reverse protection unit 750V/400A	avoid reverse connection
	IT-E165A-500 *1	Anti-reverse protection unit 900V/400A	avoid reverse connection
	IT-E165B *2	Anti-EMF unit1200V/200A	avoid current back flow
Other accessories	IT-E258	5m power cord for 3U unit, CN standard	AC input power cord
	IT-E258-15U	5m power cord for 15U unit, CN standard	AC input power cord
	IT-E258-27U	5m power cord for 27U unit, CN standard	AC input power cord
	IT-E258-37U	5m power cord for 37U unit, CN standard	AC input power cord
	IT-E176	GPIB communication interface	
	IT-E177	RS232&analog communication card	



IT-E4029-15U (Dimension:mm)

*1 The voltage/current of the DUT must be within the IT-E165A rated range

*2 The voltage/current of the DUT must be within the IT-E165B rated range

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3905B-10-510					
Power supply parameters			Load parameters		
Input Rating (0 °C-50 °C)	Voltage	0~10V	Input Rating (0 °C-50 °C)	Voltage	0~10V
	Current	-360A~510A		Current	6A~360A
	Power	-3600W~5100W		Power	60W~3600W
	Series IR(CV priority) Load resistance (CC priority mode)	0~0.02Ω 0.003Ω~1Ω		Resistance	0.003Ω~1Ω
Input Resolution	Voltage	0.001V	Input Resolution	Min.operation voltage	0.6V at 360A
	Current	0.1A		Input leak current	0.03A
	Power	1W		Voltage	0.001V
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.001Ω		Current	0.1A
Readback Resolution	Voltage	0.001V	Readback Resolution	Power	0.1W
	Current	0.1A		Resistance	0.001Ω
	Power	1W		Voltage	0.001V
Setup Accuracy	Voltage	≤0.03% + 0.03%FS	Setup Accuracy	Current	≤0.1% + 0.1%FS
	Current	≤0.1% + 0.1%FS		Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Resistance ^{*2}	Max. : 1/(1/Rset+(1/Rset)*0.1+0.008) Min. : 1/(1/Rset+(1/Rset)*0.1-0.008)
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max. : 1/(1/Rset+(1/Rset)*0.1+0.008) Min. : 1/(1/Rset+(1/Rset)*0.1-0.008)		Voltage	≤0.03% + 0.03%FS
Readback Accuracy	Voltage	≤0.03% + 0.03%FS	Readback Accuracy	Current	≤0.1% + 0.1%FS
	Current	≤0.1% + 0.1%FS		Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Rising rate	120A/ms
Voltage Ripple		≤65mVpp(Peak value)/≤10mV(RMS)	Dynamic Response Time	Descent rate	120A/ms
Rise Time (no load)/(full load)		Voltage		Dynamic frequency	100Hz
Fall Time (no load)/(full load)		Voltage	Power Regulation Rate	Voltage	≤0.05% + 0.05%FS
Dynamic Response Time ^{*1}		Voltage		Current	≤0.05% + 0.05%FS
Power Regulation Rate	Voltage	≤0.05% + 0.05%FS	Load Regulation Rate	Voltage	≤0.002%*1 + 0.05%FS
	Current	≤0.05% + 0.05%FS		Current	≤0.05% + 0.05%FS
Load Regulation Rate	Voltage	0.0035%*1 + 0.05%FS	Short Circuit Test	Current	366A
	Current	≤0.05% + 0.05%FS		OCP	375A
Input Protection Scope	OCP	-370A or 520A	Input Protection Scope	OVP	11V
	OVP	10.5V		OPP	3672W
	OPP	-3672W or 5202W		Remote Sense Compensation Voltage	≤2V
Remote Sense Compensation Voltage		≤2V			
AC Input *3	Voltage		3φ 110V~520V 1φ 85V~300V 50/60Hz		
	Frequency				
	Max. AC Apparent Power		5.55kVA		
Max. AC Current			12.5Aac		
Max. Efficiency			92%		
Power Factor			0.99		
DC Component			≤0.2A		
Current Harmonic			≤3%		
Working Temperature			0~40°C		
Storage Temperature			-10°C~70°C		
Programming Response Time			0.1ms		
Withstand Voltage (DC to ground)			300Vdc		
Withstand Voltage (AC to ground)			3500Vdc		
Cooling Mode			Air		
Dimension			660mm*437mm*43.5mm		
N.W			15kg		

*1 25%-90% rated current

*2 Resistance accuracy -- current / voltage not less than 10%FS

*3 The rated power will be decreased under low level voltage input

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-32-240					
Power supply parameters			Load parameters		
Input Rating (0 °C-50 °C)	Voltage	0~32V	Input Rating (0 °C-50 °C)	Voltage	0~32V
	Current	-240A~240A		Current	0~240A
	Power	-6000W~6000W		Power	0~6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0~0.2Ω 0.005Ω~400Ω		Resistance	0.005Ω~400Ω
Input Resolution	Voltage	0.001V	Input Resolution	Min.operation voltage	0.5V at 240A
	Current	0.01A		Input leak current	0.01A
	Power	1W		Voltage	0.001V
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.001Ω		Current	0.01A
Readback Resolution	Voltage	0.001V	Readback Resolution	Power	0.1W
	Current	0.01A		Resistance	0.01Ω
	Power	1W		Voltage	0.001V
	Voltage	≤0.03% + 0.03%FS		Current	≤0.1% + 0.1%FS
Setup Accuracy	Current	≤0.1% + 0.1%FS	Setup Accuracy	Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Resistance*2	Max.: 1/(1/Rsel+(1/Rset)*0.05+0.0005) Min.: 1/(1/Rsel-(1/Rset)*0.05-0.0005)
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max.: 1/(1/Rsel+(1/Rset)*0.05+0.0005) Min.: 1/(1/Rsel-(1/Rset)*0.05-0.0005)		Voltage	≤0.03% + 0.03%FS
	Voltage	≤0.03% + 0.03%FS		Current	≤0.1% + 0.1%FS
Readback Accuracy	Current	≤0.1% + 0.1%FS	Readback Accuracy	Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Rising rate	240A/ms
	Voltage Ripple	≤80mVpp(Peak value)/≤30mV(RMS)		Descent rate	240A/ms
	Rise Time (no load)/(full load)	Voltage		Dynamic frequency	500Hz
Dynamic Response Time*1	Voltage	≤15ms(no load)/≤30ms(full load)	Power Regulation Rate	Voltage	≤0.02% + 0.02%FS
	Fall Time (no load)/(full load)	Voltage		Current	≤0.05% + 0.05%FS
	Voltage	≤30ms(no load)/≤15ms(full load)		Voltage	≤0.02% + 0.02%FS
	Voltage	≤1ms		Current	≤0.05% + 0.05%FS
Power Regulation Rate	Voltage	≤0.02% + 0.02%FS	Load Regulation Rate	Short Circuit Test	244.8A
	Current	≤0.05% + 0.05%FS		OCP	250A
	Voltage	≤0.02% + 0.02%FS		Input Protection Scope	OVP 35V
	Current	≤0.05% + 0.05%FS		OPP	6120W
Load Regulation Rate	Voltage	≤0.02% + 0.02%FS	Remote Sense Compensation Voltage	Remote Sense Compensation Voltage	≤2V
	Current	≤0.05% + 0.05%FS			
	OCP	-250A or 250A			
	OVP	33V			
Input Protection Scope	OPP	-6120W or 6120W			
	Voltage	≤2V			
			AC Input *3	3φ 110V~520V	
				1φ 85V~300V	
Max. AC Apparent Power	Voltage			50/60Hz	
	Frequency				
	Max. AC Current			6.5kVA	
	Max. Efficiency			12.5Aac	
Power Factor				92%	
	DC Component			0.99	
	Current Harmonic			≤0.2A	
	Working Temperature			≤3%	
Storage Temperature				0~40 °C	
				-10 °C ~ 70 °C	
	Programming Response Time			0.1ms	
	Withstand Voltage (DC to ground)			300Vdc	
Cooling Mode	Withstand Voltage (AC to ground)			3500Vdc	
	Cooling Mode			Air	
	Dimension			660mm*437mm*43.5mm	
	N.W			15kg	

*1 25%-90% rated current

*2 Resistance accuracy -- current / voltage not less than 10%FS

*3 The rated power will be decreased under low level voltage input

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-80-120					
Power supply parameters			Load parameters		
Input Rating (0 °C-50 °C)	Voltage	0~80V	Input Rating (0 °C-50 °C)	Voltage	0~80V
	Current	-120A~120A		Current	0~120A
	Power	-6000W~6000W		Power	0~6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0~0.3Ω 0.01Ω~800Ω		Resistance	0.01Ω~800Ω
Input Resolution	Voltage	0.001V	Input Resolution	Min.operation voltage	0.8V at 120A
	Current	0.01A		Input leak current	0.01A
	Power	1W		Voltage	0.001V
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.01Ω		Current	0.01A
Readback Resolution	Voltage	0.001V	Readback Resolution	Power	0.1W
	Current	0.01A		Resistance	0.01Ω
	Power	1W		Voltage	0.001V
	Voltage	≤0.03% + 0.03%FS		Current	≤0.1% + 0.1%FS
Setup Accuracy	Current	≤0.1% + 0.1%FS	Setup Accuracy	Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Resistance*2	Max.: 1/(1/Rset+(1/Rset)*0.05+0.0005) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0005)
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max.: 1/(1/Rsel+(1/Rsel)*0.05+0.0005) Min.: 1/(1/Rsel-(1/Rsel)*0.05-0.0005)		Voltage	≤0.03% + 0.03%FS
	Voltage	≤0.03% + 0.03%FS		Current	≤0.1% + 0.1%FS
Readback Accuracy	Current	≤0.1% + 0.1%FS	Readback Accuracy	Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Rising rate	120A/ms
	Voltage Ripple	≤200mVpp(Peak value)/≤80mV(RMS)		Descent rate	120A/ms
	Rise Time (no load)/(full load)	Voltage		Dynamic frequency	500Hz
Dynamic Response Time*1	Voltage	≤15ms(no load)/≤30ms(full load)	Power Regulation Rate	Voltage	≤0.01% + 0.01%FS
	Fall Time (no load)/(full load)	Voltage		Current	≤0.05% + 0.05%FS
	Voltage	≤30ms(no load)/≤15ms(full load)		Voltage	≤0.01% + 0.01%FS
	Voltage	≤1ms		Current	≤0.05% + 0.05%FS
Power Regulation Rate	Voltage	≤0.01% + 0.01%FS	Load Regulation Rate	Short Circuit Test	122.4A
	Current	≤0.05% + 0.05%FS		OCP	125A
	Voltage	≤0.01% + 0.01%FS		OVP	85V
	Current	≤0.05% + 0.05%FS		OPP	6120W
Load Regulation Rate	Current	≤0.05% + 0.05%FS	Input Protection Scope	Remote Sense Compensation Voltage	≤2V
	Voltage	≤0.01% + 0.01%FS		3φ 110V ~ 520V	
	Current	≤0.05% + 0.05%FS		1φ 85V ~ 300V	
	Power	≤0.01% + 0.01%FS		50/60Hz	
Input Protection Scope	OCP	-125A or 125A	Input Protection Scope	6.5kVA	
	OVP	82V		12.5Aac	
	OPP	-6120W or 6120W		92%	
	Voltage	≤2V		0.99	
AC Input *3	Voltage			≤0.2A	
	Frequency			≤3%	
	Max. AC Apparent Power			0~40°C	
	Max. AC Current			-10°C ~ 70°C	
Max. Efficiency	Max. Efficiency			0.1ms	
	Power Factor			300Vdc	
	DC Component			3500Vdc	
	Current Harmonic			Air	
Working Temperature	Working Temperature			660mm*437mm*43.5mm	
	Storage Temperature			660mm*437mm*43.5mm	
	Programming Response Time			15kg	
	Withstand Voltage (DC to ground)				
Withstand Voltage (AC to ground)	Withstand Voltage (AC to ground)				
	Cooling Mode				
	Dimension				
	N.W				

*1 25%-90% rated current

*2 Resistance accuracy -- current / voltage not less than 10%FS

*3 The rated power will be decreased under low level voltage input

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-300-60						
Power supply parameters			Load parameters			
Input Rating (0 °C-50 °C)	Voltage	0~300V	Input Rating (0 °C-50 °C)	Voltage	0~300V	
	Current	-60A~60A		Current	0~60A	
	Power	-6000W~6000W		Power	0~6000W	
	Series IR(CV priority) Load resistance (CC priority mode)	0~1Ω 0.05Ω~3000Ω		Resistance	0.05Ω~3000Ω	
Input Resolution	Voltage	0.01V	Input Resolution	Min.operation voltage	3V at 60A	
	Current	0.001A		Input leak current	0.01A	
	Power	1W		Voltage	0.001V	
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.01Ω		Current	0.01A	
Readback Resolution	Voltage	0.01V	Readback Resolution	Power	0.1W	
	Current	0.001A		Resistance	0.01Ω	
	Power	1W		Voltage	0.001V	
	Voltage	≤0.03% + 0.03%FS		Current	≤0.1% + 0.1%FS	
Setup Accuracy	Current	≤0.1% + 0.1%FS	Setup Accuracy	Power	≤0.5% + 0.5%FS	
	Power	≤0.5% + 0.5%FS		Resistance*2	Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)	
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)		Voltage	≤0.03% + 0.03%FS	
	Voltage	≤0.03% + 0.03%FS		Current	≤0.1% + 0.1%FS	
Readback Accuracy	Current	≤0.1% + 0.1%FS	Readback Accuracy	Power	≤0.5% + 0.5%FS	
	Power	≤0.5% + 0.5%FS		Rising rate	60A/ms	
	Voltage Ripple	≤300mVpp(Peak value)/≤100mV(RMS)		Descent rate	60A/ms	
	Rise Time (no load)/(full load)	Voltage		Dynamic frequency	500Hz	
Dynamic Response Time*1	Voltage	≤15ms(no load)/≤30ms(full load)	Power Regulation Rate	Voltage	≤0.01% + 0.01%FS	
	Fall Time (no load)/(full load)	Voltage		Current	≤0.05% + 0.05%FS	
	Voltage	≤30ms(no load)/≤15ms(full load)		Voltage	≤0.01% + 0.01%FS	
	Voltage	≤1ms		Current	≤0.05% + 0.05%FS	
Power Regulation Rate	Voltage	≤0.01% + 0.01%FS	Load Regulation Rate	Short Circuit Test	62A	
	Current	≤0.05% + 0.05%FS		OCP	63A	
	Voltage	≤0.01% + 0.01%FS		OVP	330V	
	Current	≤0.05% + 0.05%FS		OPP	6120W	
Load Regulation Rate	Voltage	≤0.01% + 0.01%FS	Input Protection Scope	Remote Sense Compensation Voltage	≤3V	
	Current	≤0.05% + 0.05%FS		3φ 110V~520V		
	OCP	-63A or 63A		1φ 85V~300V		
	OVP	303V		50/60Hz		
Input Protection Scope	OPP	-6120W or 6120W		6.5kVA		
	Voltage	≤3V		12.5Aac		
	Frequency			94.5%		
	Max. AC Apparent Power			0.99		
AC Input *3	Voltage			≤0.2A		
	Frequency			≤3%		
	Max. AC Current			0~40°C		
	Max. Efficiency			-10°C ~ 70°C		
Power Factor				0.1ms		
				600Vdc		
				3500Vdc		
				Air		
DC Component				660mm*437mm*43.5mm		
				15kg		
*1 25%-90% rated current						
*2 Resistance accuracy -- current / voltage not less than 10%FS						
*3 The rated power will be decreased under low level voltage input						
* This information is subject to change without notice.						

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-500-36					
Power supply parameters			Load parameters		
Input Rating (0 °C-50 °C)	Voltage	0~500V	Input Rating (0 °C-50 °C)	Voltage	0~500V
	Current	-36A~36A		Current	0~36A
	Power	-6000W~6000W		Power	0~6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0~1Ω 0.1Ω~7500Ω		Resistance	0.1Ω~7500Ω
Input Resolution	Voltage	0.01V	Input Resolution	Min.operation voltage	2.5V at 36A
	Current	0.001A		Input leak current	0.003A
	Power	1W		Voltage	0.01V
	Series IR(CV priority) Load resistance (CC priority mode)	0.01Ω 0.01Ω		Current	0.001A
Readback Resolution	Voltage	0.01V	Readback Resolution	Power	0.1W
	Current	0.001A		Resistance	0.01Ω
	Power	1W		Voltage	0.01V
Setup Accuracy	Voltage	≤0.03% + 0.03%FS	Setup Accuracy	Current	≤0.1% + 0.1%FS
	Current	≤0.1% + 0.1%FS		Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Resistance*2	Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max.: 1/(1/Rsel+(1/Rsel)*0.05+0.0001) Min.: 1/(1/Rsel-(1/Rsel)*0.05-0.0001)		Voltage	≤0.03% + 0.03%FS
Readback Accuracy	Voltage	≤0.03% + 0.03%FS	Readback Accuracy	Current	≤0.1% + 0.1%FS
	Current	≤0.1% + 0.1%FS		Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Rising rate	36A/ms
Voltage Ripple		≤500mVpp(Peak value)/≤200mV(RMS)	Dynamic Response Time	Descent rate	36A/ms
Rise Time (no load)/(full load)		Voltage		Dynamic frequency	500Hz
Fall Time (no load)/(full load)		Voltage	Power Regulation Rate	Voltage	≤0.01% + 0.01%FS
Dynamic Response Time*1		Voltage		Current	≤0.05% + 0.05%FS
Power Regulation Rate	Voltage	≤0.01% + 0.01%FS	Load Regulation Rate	Voltage	≤0.01% + 0.01%FS
	Current	≤0.05% + 0.05%FS		Current	≤0.05% + 0.05%FS
Load Regulation Rate	Voltage	≤0.01% + 0.01%FS	Short Circuit Test	Current	36.72A
	Current	≤0.05% + 0.05%FS		OCP	37A
Input Protection Scope	OCP	-37A or 37A	Input Protection Scope	OVP	530V
	OVP	505V		OPP	6120W
	OPP	-6120W or 6120W		Remote Sense Compensation Voltage	≤3V
Remote Sense Compensation Voltage		≤5V			
AC Input *3	Voltage		3φ 110V~520V		
	Frequency		1φ 85V~300V		
			50/60Hz		
Max. AC Apparent Power			6.5kVA		
Max. AC Current			12.5Aac		
Max. Efficiency			94.5%		
Power Factor			0.99		
DC Component			≤0.2A		
Current Harmonic			≤3%		
Working Temperature			0~40°C		
Storage Temperature			-10°C~70°C		
Programming Response Time			0.1ms		
Withstand Voltage (DC to ground)			800Vdc		
Withstand Voltage (AC to ground)			3500Vdc		
Cooling Mode			Air		
Dimension			660mm*437mm*43.5mm		
N.W			15kg		

*1 25%-90% rated current

*2 Resistance accuracy -- current / voltage not less than 10%FS

*3 The rated power will be decreased under low level voltage input

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-800-24					
Power supply parameters			Load parameters		
Input Rating (0 °C-50 °C)	Voltage	0~800V	Input Rating (0 °C-50 °C)	Voltage	0~800V
	Current	-24A~24A		Current	0~24A
	Power	-6000W~6000W		Power	0~6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0~1Ω 0.15Ω~7500Ω		Resistance	0.15Ω~7500Ω
Input Resolution	Voltage	0.01V	Input Resolution	Min.operation voltage	4V at 24A
	Current	0.001A		Input leak current	0.003A
	Power	1W		Voltage	0.01V
	Series IR(CV priority) Load resistance (CC priority mode)	0.01Ω 0.01Ω		Current	0.001A
Readback Resolution	Voltage	0.01V	Readback Resolution	Power	0.1W
	Current	0.001A		Resistance	0.01Ω
	Power	1W		Voltage	0.01V
Setup Accuracy	Voltage	≤0.03% + 0.03%FS	Setup Accuracy	Current	≤0.1% + 0.1%FS
	Current	≤0.1% + 0.1%FS		Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Resistance*2	Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)		Voltage	≤0.03% + 0.03%FS
Readback Accuracy	Voltage	≤0.03% + 0.03%FS	Readback Accuracy	Current	≤0.1% + 0.1%FS
	Current	≤0.1% + 0.1%FS		Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Rising rate	24A/ms
Voltage Ripple		≤800mVpp(Peak value)/≤300mV(RMS)	Dynamic Response Time	Descent rate	24A/ms
Rise Time (no load)/(full load)		≤15ms(no load)/≤30ms(full load)		Dynamic frequency	500Hz
Fall Time (no load)/(full load)		≤30ms(no load)/≤15ms(full load)	Power Regulation Rate	Voltage	≤0.01% + 0.01%FS
Dynamic Response Time*1		≤1ms		Current	≤0.05% + 0.05%FS
Power Regulation Rate	Voltage	≤0.01% + 0.01%FS	Load Regulation Rate	Voltage	≤0.01% + 0.01%FS
	Current	≤0.05% + 0.05%FS		Current	≤0.05% + 0.05%FS
Load Regulation Rate	Voltage	≤0.01% + 0.01%FS	Short Circuit Test	Current	24.48A
	Current	≤0.05% + 0.05%FS		OCP	25A
Input Protection Scope	OCP	-25A or 25A	Input Protection Scope	OVP	850V
	OVP	808V		OPP	6120W
	OPP	-6120W or 6120W		Remote Sense Compensation Voltage	≤8V
Remote Sense Compensation Voltage		≤8V			
AC Input *3	Voltage		3φ 110V~520V		
	Frequency		1φ 85V~300V		
Max. AC Apparent Power			50/60Hz		
Max. AC Current			6.5kVA		
Max. Efficiency			12.5Aac		
Power Factor			94.5%		
DC Component			0.99		
Current Harmonic			≤0.2A		
Working Temperature			≤3%		
Storage Temperature			0~40°C		
Programming Response Time			-10°C ~ 70°C		
Withstand Voltage (DC to ground)			0.1ms		
Withstand Voltage (AC to ground)			1000Vdc		
Cooling Mode			3500Vdc		
Dimension			Air		
N.W			660mm*437mm*43.5mm		
			15kg		

*1 25%-90% rated current

*2 Resistance accuracy -- current / voltage not less than 10%FS

*3 The rated power will be decreased under low level voltage input

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-1500-12					
Power supply parameters			Load parameters		
Input Rating (0 °C-50 °C)	Voltage	0 ~ 1500V	Input Rating (0 °C-50 °C)	Voltage	0 ~ 1500V
	Current	-12A ~ 12A		Current	0 ~ 12A
	Power	-6000W ~ 6000W		Power	0 ~ 6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0 ~ 1Ω 0.5Ω ~ 7500Ω		Resistance	0.5Ω ~ 7500Ω
Input Resolution	Voltage	0.01V	Input Resolution	Min.operation voltage	7.5V at 12A
	Current	0.001A		Input leak current	0.003A
	Power	1W		Voltage	0.01V
	Series IR(CV priority) Load resistance (CC priority mode)	0.01Ω 0.01Ω		Current	0.001A
Readback Resolution	Voltage	0.01V	Readback Resolution	Power	0.1W
	Current	0.001A		Resistance	0.01Ω
	Power	1W		Voltage	0.01V
	Voltage	≤0.03% + 0.03%FS		Current	≤0.1% + 0.1%FS
Setup Accuracy	Current	≤0.1% + 0.1%FS	Setup Accuracy	Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Resistance*2	Max. : 1/(1/Rset+(1/Rset)*0.05+0.0001) Min. : 1/(1/Rset-(1/Rset)*0.05-0.0001)
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max. : 1/(1/Rsel+(1/Rsel)*0.05+0.0001) Min. : 1/(1/Rsel-(1/Rsel)*0.05-0.0001)		Voltage	≤0.03% + 0.03%FS
	Voltage	≤0.03% + 0.03%FS		Current	≤0.1% + 0.1%FS
Readback Accuracy	Current	≤0.1% + 0.1%FS		Power	≤0.5% + 0.5%FS
	Power	≤0.5% + 0.5%FS		Rising rate	12A/ms
	Voltage Ripple	≤1500mVpp(Peak value)/≤500mV(RMS)	Dynamic Response Time	Descent rate	12A/ms
	Rise Time (no load)/(full load)	Voltage		Dynamic frequency	500Hz
Dynamic Response Time*1	Fall Time (no load)/(full load)	Voltage		Voltage	≤0.01% + 0.01%FS
	Voltage	≤30ms(no load)/≤15ms(full load)		Current	≤0.05% + 0.05%FS
	Voltage	≤1ms		Voltage	≤0.01% + 0.01%FS
	Voltage	≤0.01% + 0.01%FS		Current	≤0.05% + 0.05%FS
Power Regulation Rate	Current	≤0.05% + 0.05%FS	Load Regulation Rate	Short Circuit Test	12.24A
	Voltage	≤0.01% + 0.01%FS		OCP	12.7A
	Current	≤0.05% + 0.05%FS		Input Protection Scope	OVP 1590V
	OCP	-12.5A or 12.5A		OPP	6120W
Input Protection Scope	OVP	1515V		Remote Sense Compensation Voltage	≤15V
	OPP	-6120W or 6120W			
	Remote Sense Compensation Voltage	≤15V			
AC Input *3	Voltage		3φ 110V~520V		
	Frequency		1φ 85V~300V		
			50/60Hz		
Max. AC Apparent Power			6.5kVA		
Max. AC Current			12.5Aac		
Max. Efficiency			94.5%		
Power Factor			0.99		
DC Component			≤0.2A		
Current Harmonic			≤3%		
Working Temperature			0 ~ 40 °C		
Storage Temperature			-10 °C ~ 70 °C		
Programming Response Time			0.1ms		
Withstand Voltage (DC to ground)			1800Vdc		
Withstand Voltage (AC to ground)			3500Vdc		
Cooling Mode			Air		
Dimension			660mm*437mm*43.5mm		
N.W			15kg		

*1 25%-90% rated current

*2 Resistance accuracy -- current / voltage not less than 10%FS

*3 The rated power will be decreased under low level voltage input

* This information is subject to change without notice.