


Product Datasheet - Technical Specifications

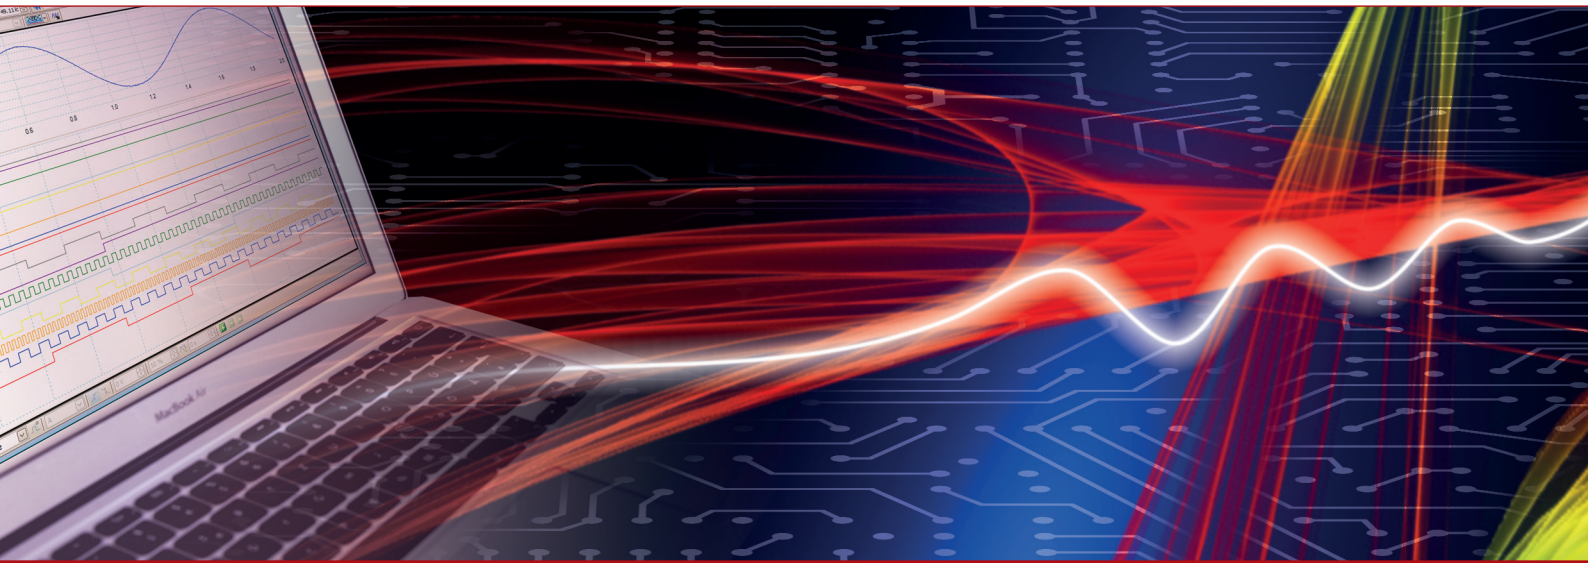

More information in our Web-Shop at ► www.meilhaus.com and in our download section.

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: **+49 - 81 41 - 52 71-0**

FAX: **+49 - 81 41 - 52 71-129**

E-Mail: sales@meilhaus.com

Downloads:

www.meilhaus.com/en/infos/download.htm

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel.	+49 - 81 41 - 52 71-0
Fax	+49 - 81 41 - 52 71-129
E-Mail	sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.
© Meilhaus Electronic.

www.meilhaus.de

Use these converters to connect „classic“ serial devices to a TCP/IP ethernet network. Control serial instruments or printers over a TCP/IP ethernet/LAN, the internet or wireless LAN.

- Converts ethernet to serial COM RS232/RS422/RS485.
- 1, 2, 4, or 8 ports.
- Ethernet/LAN: Auto-detecting 1000BaseT/100BaseTx/10BaseT (GigaLAN, RJ45).
- Option WLAN/Wireless LAN: IEEE802.11 n/b/g.
- Configuration utility automatically finds the NetCOM devices in the network. Supports protocols: TCP/IP, UDP, Telnet, DHCP, ICMP, HTTP, SNMP V1/2c/3, DNS.
- Configuration over driver panels, serial port, Telnet, web browser or SNMP.
- Automatic mode switching between driver and raw mode.
- Models with ART (Automatic Receive Transmit Control).
- Models with POE: Power over Ethernet¹⁾.

¹⁾ Power over Ethernet: Must be supplied from the Ethernet, for example with Power over Ethernet Splitter VS-POE 10.

Technical Specifications

NetCOM-Plus Series



Model	Option ¹⁾	Option ²⁾	Option ³⁾	Conversion from	to serial	ART ⁴⁾	Serial Rate	Power supply			
Netcom-PLUS-111	-	-WLAN	-	Ethernet: Auto-Detecting 1000BaseT/ 100BaseTx/ 10BaseT (GigaLAN, RJ45). Wireless (Option6): IEEE 802.11b/g/n operation in access point or client mode	1x 9-pin D-sub, RS232	Ja	RS232: 200 bps... 921,6/ 1000 kbps, RS422/485: 200 bps... 3,7 Mbps	external, optional accessory			
Netcom-PLUS-113					1x 9-pin D-sub, RS232/ RS422/RS485						
Netcom-PLUS-211					2x 9-pin D-sub, RS232						
Netcom-PLUS-213					2x 9-pin D-sub, RS232/ RS422/RS485						
Netcom-PLUS-411	-POE			-RJ45	Protokols: TCP/IP, UDP, Telnet, PPP, DHCP, ICMP, HTTP, LPD, SNMP V1/2c/3, DNS, openVPN.				4x 9-pin D-sub, RS232		
Netcom-PLUS-413			-						4x 9-pin D-sub, RS232/ RS422/RS485		
NetCOM-PLUS-811									8x 9-pin D-sub, RS232		
NetCOM-PLUS-813									8x 9-pin D-sub, RS232/ RS422/RS485		

1) Power over Ethernet: Must be supplied from the Ethernet, for example with Power over Ethernet Splitter VS-POE 10.

2) 802.11 n/g/b incl. antenna.

3) With RJ45 connectors.

4) Automatic Receive Transmit Control (or by RTS).

5) Models with -POE: No power supply adaptor included.

6) IEEE 802.11b/g, max. 54 MB/s. Encryption WPA-PSK/TKIP, WEP-128. Infrastructure mode (uses access point), adhoc mode (direct connection to a PC/laptop).