

## Product Datasheet - Technical Specifications



More information in our Web-Shop at ► [www.meilhaus.com](http://www.meilhaus.com)

### Your contact

Technical and commercial sales, price information,  
quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

**Meilhaus Electronic GmbH**  
Am Sonnenlicht 2  
82239 Alling/Germany

Tel. +49 - (0)81 41 - 52 71-0 E-  
Mail [sales@meilhaus.com](mailto:sales@meilhaus.com)

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

# USB 2.0 Ranger<sup>®</sup> 2301

## 1-Port USB 2.0 100m CAT 5e/6/7 Extender System

The USB 2.0 Ranger 2301 is a single-port USB 2.0 high speed extension solution, enabling USB 2.0 connections at up to 480 Mbps over 100m/330ft of CAT 5e/6/7 cabling. It features full device and host support as well as Mass Storage Acceleration for improved USB 2.0 device bulk transfer speeds over previous generation extenders and the ExtremeUSB<sup>®</sup> suite of features.



## Features

The Ranger 2301 extends all USB 2.0 peripherals such as flash drives, keyboards, mice, webcams and interactive whiteboards across a dedicated CAT 5e/6/7 connection.


- USB 2.0 throughput up to 480Mbps
- Supplies up to 1 Amp to USB port
- Operates with all USB controllers
- Mass Storage Acceleration
- FCC/CE Class B

Includes the ExtremeUSB<sup>®</sup> suite of features:

- Transparent USB extension
- True plug and play; no software drivers required
- Works with all major operating systems: Windows<sup>®</sup>, macOS<sup>™</sup>, Linux<sup>®</sup>, and Chrome OS<sup>™</sup>

## Applications

- Remote storage
- Security and monitoring
- Professional Audio-Visual
- Keyboard and mouse

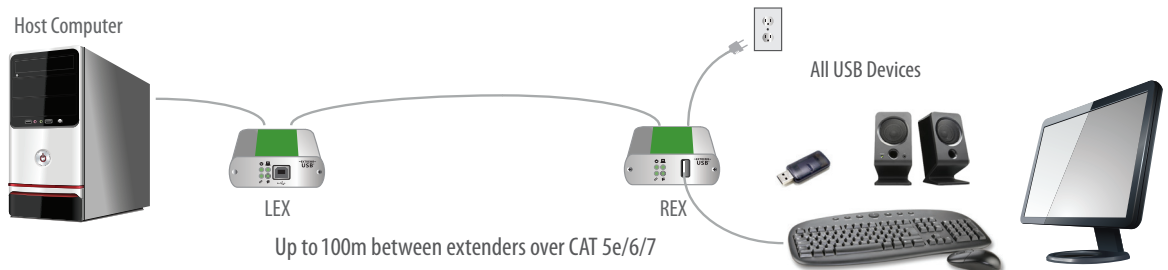

An Analog Devices Brand



Specifications subject to change without notification.

©2022

Icron | An Analog Devices Brand

#90-01443-D01

# USB 2.0 Ranger® 2301 Specifications

## RANGE

Direct Connect: Up to 100m (330 ft) over solid core CAT 5e/6/7

## USB DEVICE SUPPORT

Maximum USB 2.0 Throughput: Up to 480Mbps

Maximum USB 1.1 Throughput: Up to 12Mbps

Traffic Types: All USB 2.0 and 1.1 Traffic Types

Device Types: All USB 2.0 and 1.1 Device Types

## LEX (LOCAL EXTENDER)

USB Connector: 1 x USB Type B Receptacle

Link Connector: 1 x RJ45

Dimensions: 86.0mm x 75.0mm x 26.0mm (3.4" x 3.0" x 1.0")

Enclosure Material: Silver Anodized Aluminum

## REX (REMOTE EXTENDER)

USB Connector: 1 x USB Type A Receptacle

Link Connector: 1 x RJ45

Dimensions: 86.0mm x 75.0mm x 26.0mm (3.4" x 3.0" x 1.0")

Enclosure Material: Silver Anodized Aluminum

Available Current: Up to 1 Amp to USB port

Power Supply: 100-240V AC Input, 5V 3A DC Output

## ENVIRONMENTAL

Operating Temperature: 0°C to 50°C (32°F to 122°F)

Storage Temperature: -20°C to 70°C (-4°F to 158°F)

Operating Humidity: 20% to 80% relative humidity, non-condensing

Storage Humidity: 10% to 90% relative humidity, non-condensing

## COMPLIANCE

Certifications: FCC (Class B), CE (Class B), RoHS2/3 (CE), ICES-003 Issue 7, EN 62368-1

## SUPPORT

Warranty: 2-year



## Ordering Information

The USB 2.0 Ranger® 2301 system includes a LEX, REX, USB Cable, Quick Start Guide, international power adapter with country specific power cord and 2-year warranty.

PART #	NAME	DESCRIPTION
00-00391	USB 2.0 Ranger® 2301 - NA	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, NA Power Cord
00-00392	USB 2.0 Ranger® 2301 - EU	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, EU Power Cord
00-00393	USB 2.0 Ranger® 2301 - UK	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, UK Power Cord
00-00394	USB 2.0 Ranger® 2301 - AU	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, AU Power Cord
00-00395	USB 2.0 Ranger® 2301 - JP	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, JP Power Cord