

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com and in our download section.

Your contact

**Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:**

Tel.: **+49 - 81 41 - 52 71-0**

FAX: **+49 - 81 41 - 52 71-129**

E-Mail: sales@meilhaus.com

Downloads:

www.meilhaus.com/en/infos/download.htm

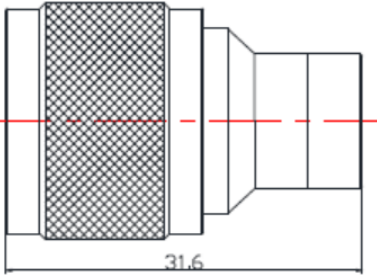
Meilhaus Electronic GmbH | Tel. **+49 - 81 41 - 52 71-0**
Am Sonnenlicht 2 | Fax **+49 - 81 41 - 52 71-129**
82239 Alling/Germany | E-Mail sales@meilhaus.com

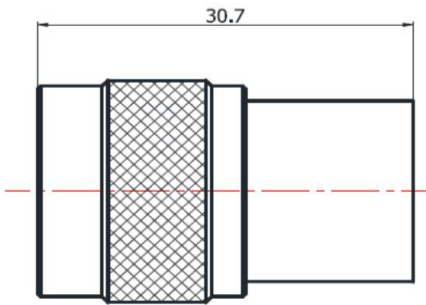
Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.
© Meilhaus Electronic.

www.meilhaus.de

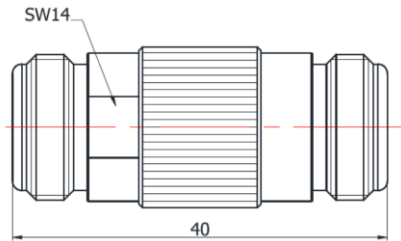
Version Number:

CK106E Economical Network Analysis Calibration Kit

CONNECTOR DATA SHEET	RIGOL-CK106E
N MALE LOAD	CK106E-LOAD
	
*Unit: mm	
Electrical Specifications	
Impedance	50 Ohms
Frequency Range	DC to 1.5 GHz
Insertion Loss (dB)	N/A
Return Loss/VSWR	1.3
Materials Information	
Centre Contact	CuBe gold plated
Outer Contact	Brass nickel plated
Body	Brass nickel plated
Dielectric	PTFE
Environmental Data	
Temperature Range	-40°C to +85°C
Vibration	Compliant with GJB150-16
Temperature Shock	Compliant with GJB150-05
2002/95/EC(RoHS)	Compliant

OPEN DATASHEET	RIGOL-CK106E
N MALE OPEN	CK106E-OPEN
	
*Unit: mm	
Electrical Specifications	
Impedance	50 Ohms
Frequency Range	DC to 1.5 GHz
Insertion Loss (dB)	N/A
Return Loss	0.3
Materials Information	
Center Contact	N/A
Outer Contact	Brass Gold Plated
Body	Brass Nickel Plated
Dielectric	N/A
Environmental Data	
Temperature Range	-40°C to +165°C
2002/95/EC(RoHS)	Compliant

SHORT DATASHEET	RIGOL-CK106E
N MALE SHORT	CK106E-SHORT
*Unit: mm	
Electrical Specifications	
Impedance	50 Ohms
Frequency Range	DC to 1.5 GHz
Insertion Loss (dB)	N/A
Return Loss	0.3
Materials Information	
Center Contact	Brass Gold Plated
Outer Contact	Brass Nickel Plated
Body	Brass Nickel Plated
Dielectric	N/A
Environmental Data	
Temperature Range	-40°C to +165°C
2002/95/EC(RoHS)	Compliant

ADAPTOR DATASHEET	RIGOL-CK106E
N(FEMALE)-N(FEMALE)	CK106E-THRU
 <p>*Unit: mm</p>	
Electrical Specifications	
Impedance	50 Ohms
Frequency Range	DC to 1.5 GHz
Insertion Loss (dB)	0.1 xSq.(f_GHz)
VSWR/Return Loss	1.25
Materials Information	
Center Contact	CuBe Gold Plated
Outer Contact	Brass Nickel Plated
Body	Brass Nickel Plated
Dielectric	PTFE
Environmental Data	
Temperature Range	-40°C to +165°C
2002/95/EC(RoHS)	Compliant