

Product Datasheet - Technical Specifications



More information in our Web-Shop at **> www.meilhaus.com**

Your contact

Technical and commercial sales, price information, quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH Am Sonnenlicht 2

 Am Sonnenlicht 2
 Tel. +49 - (0)81 41 - 52 71-0 E

 82239 Alling/Germany
 Mail sales@meilhaus.com

 Mentioned company and product names may be registered trademarks of the respective

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

www.meilhaus.com



Automatic cable tester

SYNOR 5000-H

	G
Maximum test points number	Up to 2048 points
Maximum switching cards number	16
Tests types performed	Continuity, Isolation, Dielectric, Functional, and Components
Main power supply	115-230 VAC ±15 % 47 to 64 Hz / single-phase
Entry Power	40VA à vide - 300 VA max. par coffret
Temperature range	Storage: -10°C to +60°C Operation: 0°C to +45°C Specifications guaranteed after a 1/2 hour warm-up and relative humidity <50%
Altitude	Up to 2 000 m
Relative Humidity	90 % max. by 31°C
S O Height S Width S Depth S Weight	375 mm 520 mm 560 mm 25 kg
Security class	Class 1 (ground connection)
Overvoltage category	CAT II
Pollution Degree	2



ADVANTAGES

- Tabletop and standalone unit in a metal enclosure (operates with or without a computer)
- Possibility to extend the number of test points
- 7U 19-inch rack
- (i) WINPASS software: compatible with all versions of Windows, multilingual on request
- Connector outputs: selectable
 Calibration box: SY5000-CAL
 - Calibration box. SYS000-CAL
- Switching cards: optional
 - Compatible with: SYNOR 4200 series
 - Ethernet, PLC interfaces
- (j) Options and accessories available

APPLICATIONS & INDUSTRIES

- Railway
- Military
- Production & Laboratory
- Aerospace / Space
- Cable, harness, and connector manufacturers


ĺ

For more technical information on the SYNOR 5000-H, including details on tests, switching cards, accessories, and available options, you can refer to the overview of the SYNOR 5000 series.



Technical data sheet

SYNOR 5000-H

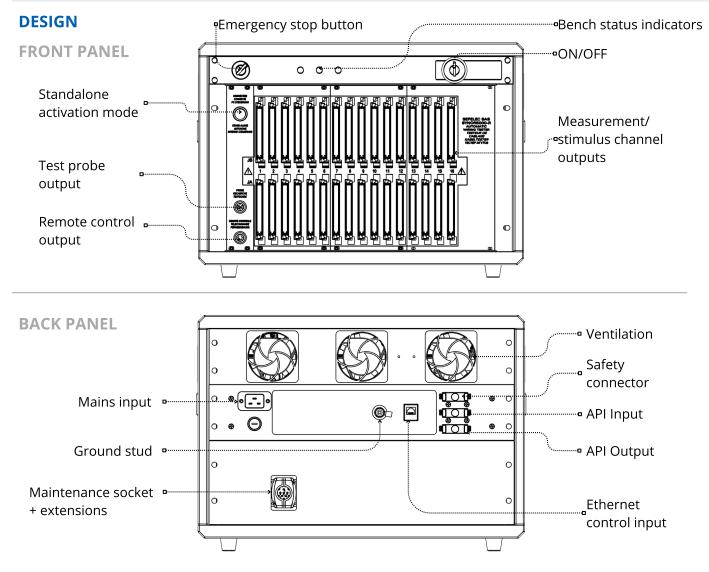

For more technical information on the SYNOR 5000-H, including details on tests, switching cards, accessories, and available options, you can refer to the overview of the SYNOR 5000 series.

Discover our product ranges:

1



Automatic cable tester SYNOR

- From 8 to 140,000 test points
- Continuity in 2 and 4 wires up to 10A
- Isolation up to 5000V DC
- Dielectric strength up to 4000V AC and 5500V DC
- Configuration: in cabinet or compact case, mobile or remote



SCANNER 64-SC

- High density: 8 to 512 channels
- Maximum voltage: 5kVAC 500VA and 6kVDC
- Insulation: up to 200GΩ under 1000 VDC
- Ground continuity: up to 32A AC max.
- Compliant with: IEC 61010-2-034



SEFELEC 5X

- Dielectric strength: 5 kVAC and 6 kVDC with a power of 50 or 500VA
- Insulation measurement: under 1000VDC for measurements up to 2 T Ω
- Ground continuity control: under 32A or 50AAC

