

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: **+49 - (0)81 41 - 52 71-0**

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. **+49 - (0)81 41 - 52 71-0** E-
Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

www.meilhaus.com

EM-Clamp Calibration Fixture

1 Introduction

The TBEMCL1-CAL is an EM-clamp calibration fixture built in accordance with the corresponding specification in the standard IEC/EN 61000-4-6, Annex A. It is used to calibrate the coupling and decoupling factors and the input impedance of EM-clamps. Furthermore, it is used to set immunity test levels according to IEC/EN 61000-4-6.




Picture 1: TBEMCL1-CAL Calibration Fixture

2 Specification

Compliance:	IEC/EN 61000-4-6, Annex A
Nominal frequency range:	150 kHz – 80 MHz
Usable frequency range:	10 kHz – 1 GHz
Nominal impedance:	248 Ω
Impedance range:	$\sim 230\Omega - 260 \Omega$
RF connectors:	N-Female
Center conductor height:	adjustable, $\sim 47 \text{ mm} - 75 \text{ mm}$
Center conductor material:	$\varnothing 4 \text{ mm}$, brass, nickel gold plated
Spacing between brackets:	652 mm
Ground plane dimensions:	1066 x 500 mm
Panel material:	Aluminium 6061
Weight:	6.5 kg

EM-Clamp Calibration Fixture

3 Drawing

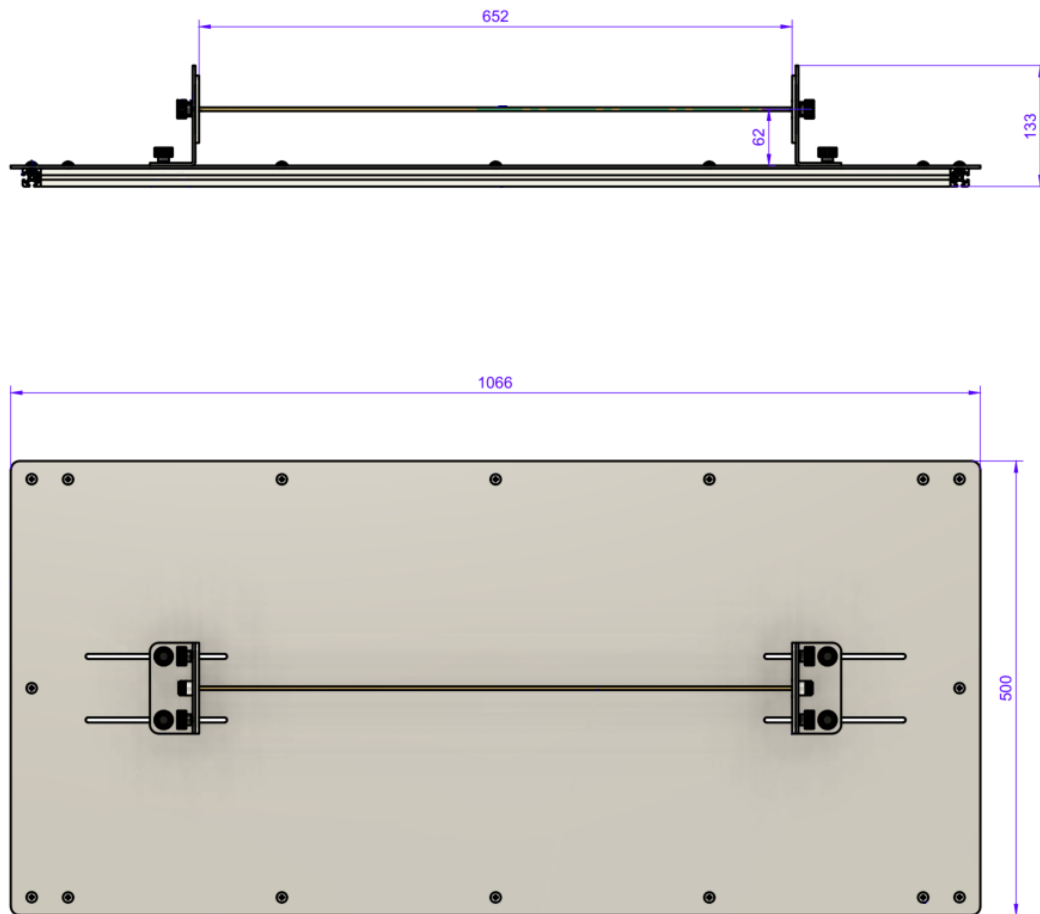

4 Ordering Information

Part Number	Description
TBEMCL1-CAL	EM-Clamp Calibration Fixture

5 History

Version	Date	Author	Changes
V 1.0	12.11.2025	Mayerhofer	Creation