


Product Datasheet - Technical Specifications

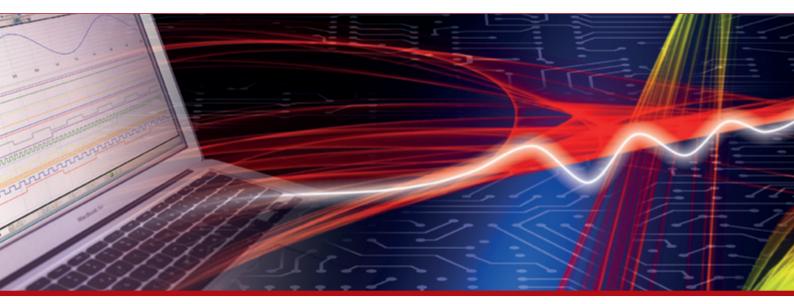

More information in our Web-Shop at ▶ www.meilhaus.com

Your contact

Technical and commercial sales, price information, quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

FAX: +49 - (0)81 41 - 52 71-129

E-Mail: sales@meilhaus.com



Injection Transformer

1 Introduction

The TBJT01 is a wideband injection transformer for control loop stability measurements. It provides galvanic isolation between the swept signal source and the control loop. The injection transformer is internally terminated with a 5 Ohm resistor and protected with a 100 mA fuse. The usable frequency range is 10 Hz to 45 MHz.



Picture 1: TBJT01 injection transformer

2 Specification

Compliance: RoHS Termination resistor: 5Ω

Fuse: 100 mA (Littlefuse 0451.100MRL); secondary (output) side

Turns ratio: 1:1

Characterized freq. range: 1 Hz to 100 MHz
Usable frequency range: 10 Hz – 45 MHz
3 dB frequency range: 15 Hz – 9 MHz typ.

Insertion loss (S21): 15.5 dB typ.

Capacitance: 90 pF @ 1 Khz; primary to secondary winding

DC saturation current: 12 mA

Max. voltage rating: 600V CAT II; primary to secondary winding

Input connector: 50 Ω BNC female,

Output connector: 4 mm safety banana jacks, 20 mm spacing

Operating temp. range: 0°C – 60°C

Enclosure dimensions: 70 mm x 60 mm x 140 mm

Weight: 250 g



Injection Transformer

3 Frequency response


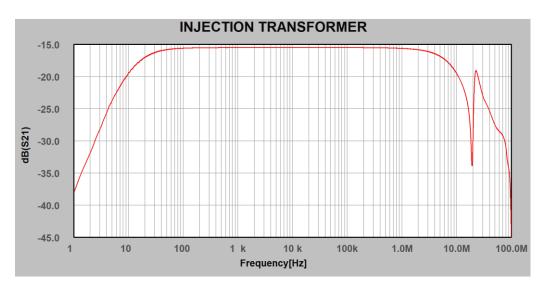



Figure 1: typical insertion loss

4 Application

The control loop is commonly broken at the point between the amplifier output and the input of the feedback network:



The isolation transformer is inserted into the control loop and connected to the Bode-Analyzer:

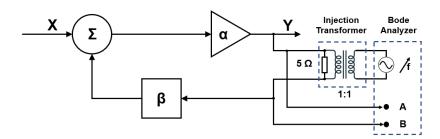





Injection Transformer

5 Ordering Information

Part Number	Description	
TBJT01	10 Hz – 45 MHz injection transformer	

6 History

Version	Date	Author	Changes
V 1.0	6.2.2023	Mayerhofer	Creation