

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: **+49 - (0)81 41 - 52 71-0**

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. **+49 - (0)81 41 - 52 71-0** E-
Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

www.meilhaus.com

TBMHA1 Mains Harmonics Current Coupler



1. Introduction

The TBMHA1 is a current coupler, primarily designed for mains harmonics measurements. It is built around a REO WKO/CL-P25 AC/DC compensated wideband current transformer, with the mains line passing through its core aperture.

The TBMHA1 produces a current proportional to the mains current of the connected load. Consequently, it requires a shunt resistor, which can be the input impedance of a DC-coupled measurement receiver or a BNC 50 Ohm feed-through termination attached to the current coupler output. The current transformer's maximum primary current range is 25A, and its transducer factor is 1 mA/A. A 50 Ω termination results in a transducer factor of 50 mV/A.

The TBMHA1 is equipped with a 16A C19 connector at the mains input side and with country specific mains sockets at the mains output side.



Picture 1: TBMHA1 mains harmonics current coupler

2. Specification

Mains voltage range:	100 V – 120 V / 200 V – 240 V; mains voltage selection switch
Max. mains current:	16 A, depending on country specific mains output socket
Transducer factor:	50 mV/A with 50 Ohm load resistor (DC coupled)
Mains input socket:	C19, 16 A
Mains output socket:	country specific; CEE7/3 16 A (Schuko), NEMA 5-15 15 A, AS/NZS 3112:201 15 A, BS1363, 13A
Current output socket:	BNC-Female
Dimensions:	W x H x L 100 mm x 118 mm x 240 mm
Weight:	1.4 kg


Current transformer characteristics:

Nominal primary current range, I_{pN} :	0 - 25 A _{AC}
Maximum primary current range, I_{maxpN} :	35 A _{AC}
Output current range, I_{aN} :	0 – 25 mA
Current transformation ratio, K:	1000:1
Minimum shunt (load) resistor, R_{min} :	1 Ω
Maximum shunt (load) resistor, R_{max} :	200 Ω
Frequency range:	DC – 150 kHz
Rise time, t_r :	$\leq 1.5 \mu s$
Offset current, I_{off} :	≤ 0.15 mA; nulling pot
Ambient current range:	-25°C - + 70°C


TBMHA1 Mains Harmonics Current Coupler



3. Principle schematic

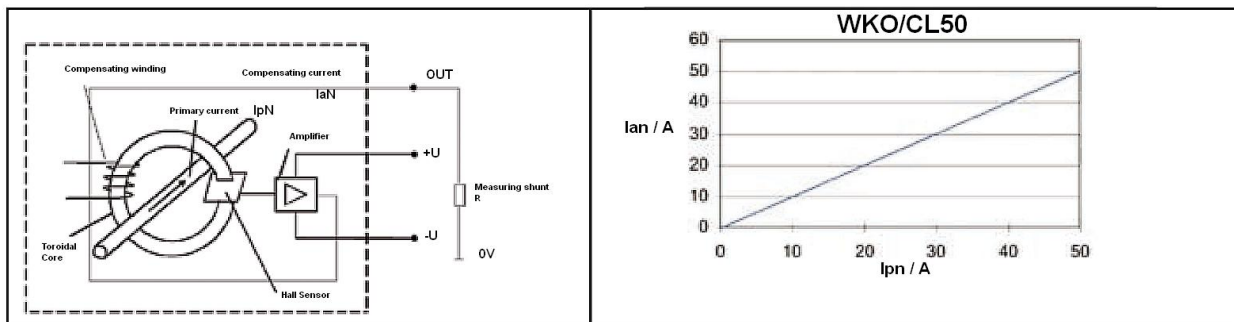


Basic circuit of the current transformer

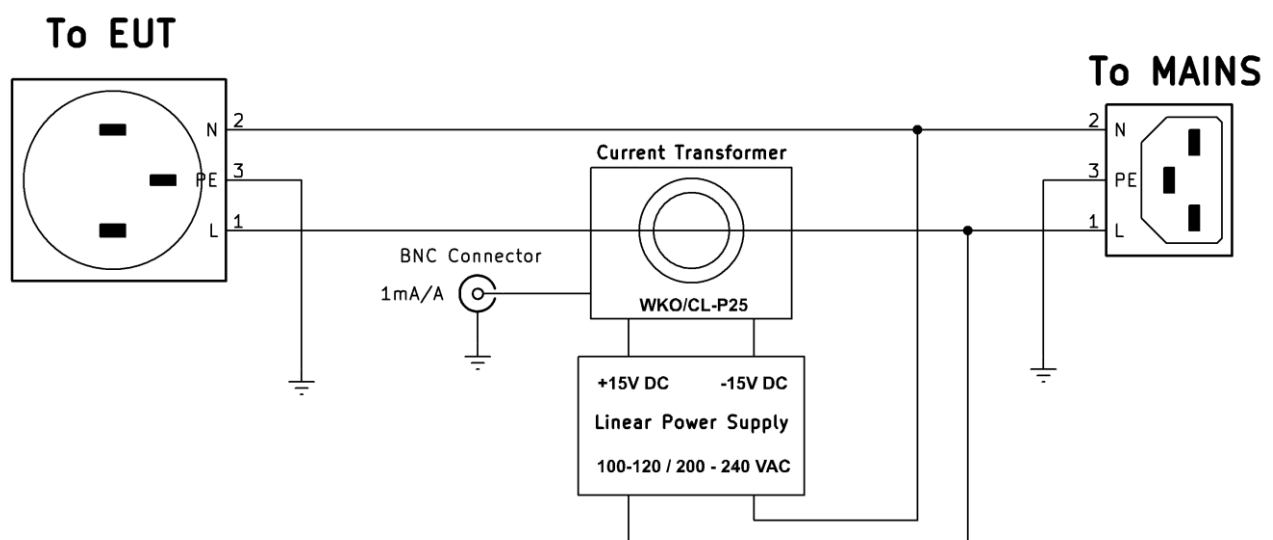

Principle schematic of the mains harmonics current coupler


4. Application

The photo below shows a setup example for a mains harmonics measurement:

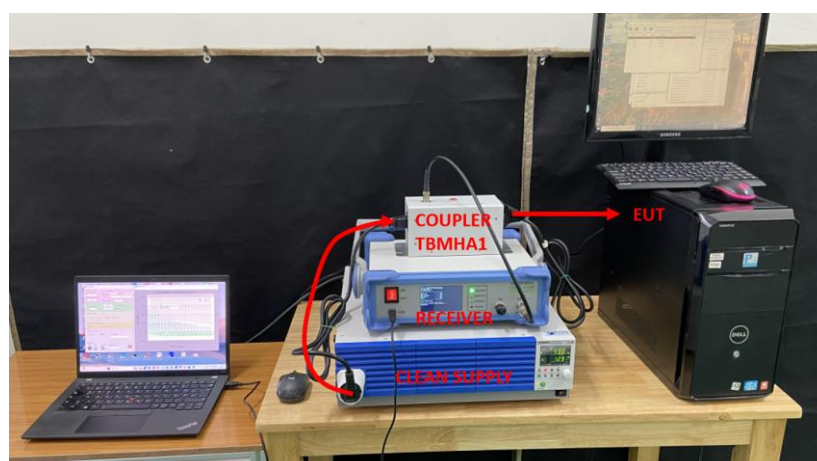

Mains harmonics measurement setup

TBMHA1 Mains Harmonics Current Coupler

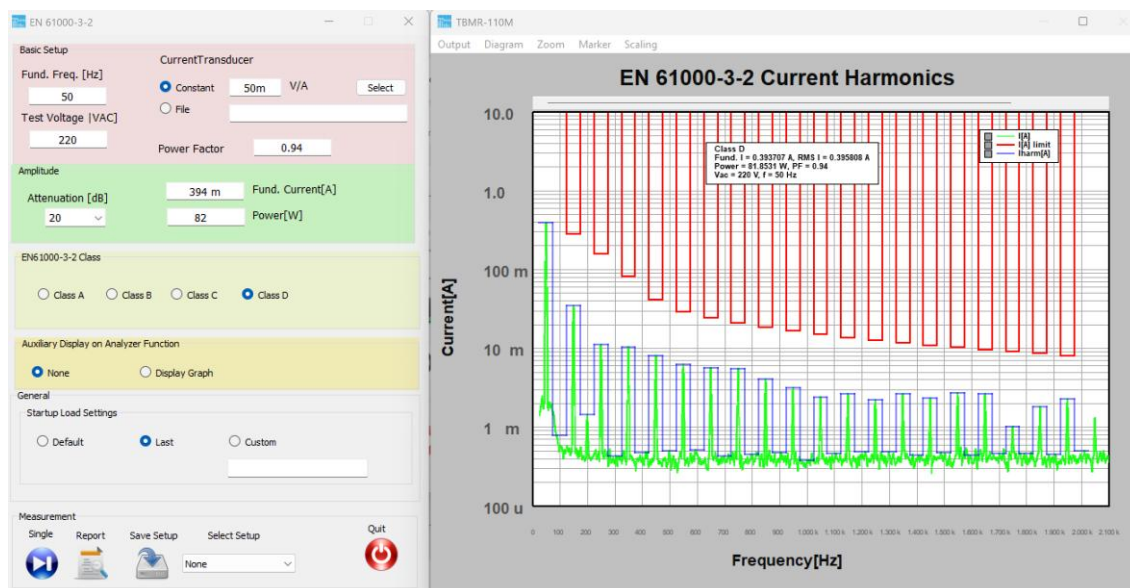

Mains harmonics measurement result example

Refer to the application note *AN_TBMR-110M_EN61000-3-2_Mains Harmonics Analyzer.docx* for more details.

5. Ordering Information

Part Number	Description
TBMHA1 - EU	Mains harmonics current coupler with Schuko socket (CEE7/3, 8 A), 16 A cold appliance cable, 75 cm coaxial cable BNC-male / N-male/RG223
TBMHA1 - US	Mains harmonics current coupler with US socket (NEMA 5-15, grounded, type B, 15A), 15A cold appliance cable, 75 cm coaxial cable BNC-male / N-male/RG223
TBMHA1 - AU	Mains harmonics current coupler with Australian socket (AS/NZS 3112:201, 15A), 15A cold appliance cable, 75 cm coaxial cable BNC-male / N-male/RG223
TBMHA1 - UK	Mains harmonics current coupler with UK socket (BS1363, 13A), 16 A cold appliance cable, 75 cm coaxial cable BNC-male / N-male/RG223

6. History

Version	Date	Author	Changes
V 1.0	2.12.2025	Mayerhofer	Creation