

## Product Datasheet - Technical Specifications



More information in our Web-Shop at ► [www.meilhaus.com](http://www.meilhaus.com)

### Your contact

Technical and commercial sales, price information,  
quotations, demo/test equipment, consulting:

Tel.: **+49 - (0)81 41 - 52 71-0**

FAX: **+49 - (0)81 41 - 52 71-129**

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

**Meilhaus Electronic GmbH**  
Am Sonnenlicht 2  
82239 Alling/Germany

Tel. **+49 - (0)81 41 - 52 71-0**  
Fax **+49 - (0)81 41 - 52 71-129**  
E-Mail [sales@meilhaus.com](mailto:sales@meilhaus.com)

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

## RF PULSE CURRENT MONITORING PROBE

### 1 Introduction

The TBPCP1-20100 is a RF pulse current monitoring probe, expanding the Tekbox product range of affordable test equipment.

The probe has a very flat response from 20 Hz to 100 MHz and is characterized over the frequency range from 1 Hz to 200 MHz. The TBPCP1-20100 is typically used for surge or RF pulse current monitoring applications in the time domain, in contrary to RF current monitoring probes designed for EMC applications, which are typically used for measurements in the frequency domain.



*Picture 1: TBPCP1-20100RF current monitoring probe*

The aperture of the RF current monitoring probe is 25 mm. Its transfer impedance is -20 dB Ohm with a typical 3dB bandwidth from 20 Hz to 100 MHz.

## RF PULSE CURRENT MONITORING PROBE

### 2 Specification

Characterized frequency range: 1 Hz to 200 MHz  
3 dB bandwidth: 20 Hz to 100 MHz (measured in a 50 + 50 Ohm loop)  
Transfer impedance into 50 Ohm load: -20 dB Ohm; 0.1 V/A  
Transfer impedance into high Z: 0.2 V/A  
Probe port impedance: 50 Ohm  
Droop rate: < 10% / ms  
Rise time: < 5 ns  
Max. CW primary RMS AC current with respect to internal resistor dissipation ratings: 300A  
Max. primary single pulse current with respect to internal resistor pulse current ratings:  
900A @ 100ms pulse width; 3000A @ 1ms pulse width  
Max. current time product: 0.04 Ampere seconds  
Max. RMS AC current, linear: 22 A  
Max. core temperature: 80 °C  
Aperture diameter: 25 mm  
Outside diameter: 76 mm  
Height: 31 mm  
Weight: 320 g  
Connector type: N female

### 3 Transfer impedance

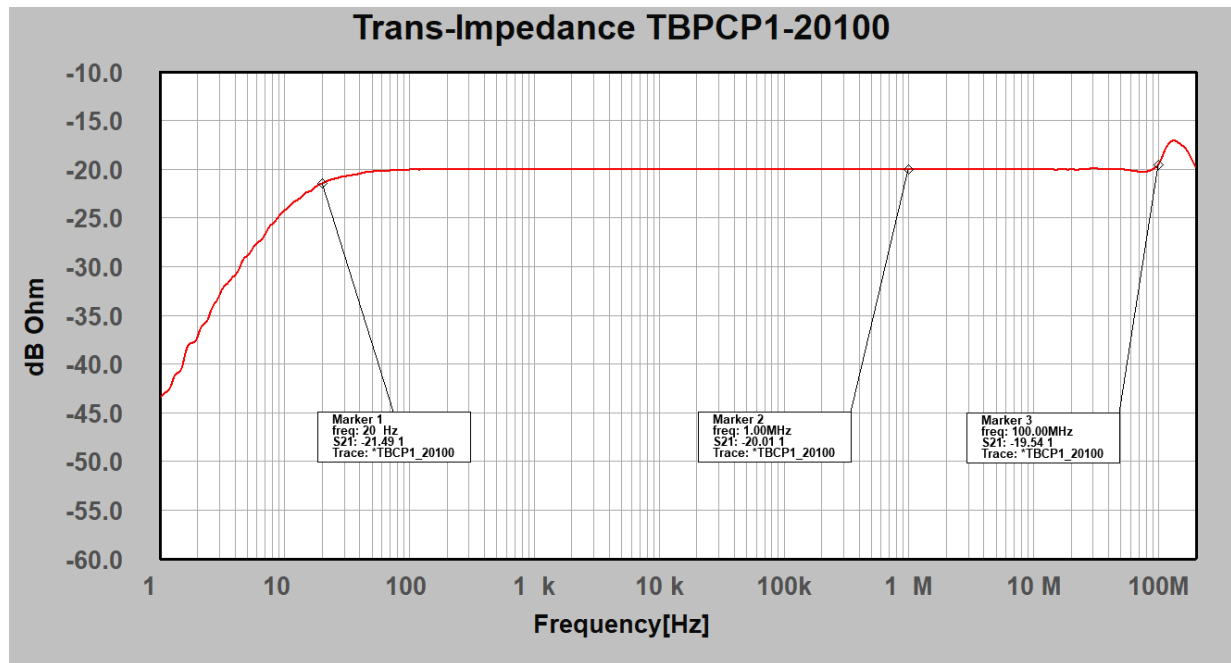


Figure1: typical transfer impedance, 1 Hz – 200 MHz

## RF PULSE CURRENT MONITORING PROBE

### 4 Typical transfer impedance table

The table below shows typical transfer impedance data of a TBPCP1-20100 pulse current probe. Each current probe is delivered with its corresponding measurement protocol. The transimpedance is given for a 50 Ohm load.

Transimpedance [V/A] =  $10^{(dBOhm/20)}$  @ 50 Ohm

Transimpedance [V/A] =  $2 \cdot 10^{(dBOhm/20)}$  @ High Z

Frequency	transfer impedance [dBΩ] 50 Ohm load	transfer impedance [V/A] 50 Ohm load	transfer impedance [V/A] high Z load
1 Hz	-43,49	0,007	0,013
2,5 Hz	-35,00	0,018	0,036
5 Hz	-28,96	0,036	0,071
7.5 Hz	-25,98	0,050	0,101
10 Hz	-24,27	0,061	0,122
12.5 Hz	-23,23	0,069	0,138
15 Hz	-22,41	0,076	0,151
17.5 Hz	-21,89	0,080	0,161
20 Hz	-21,49	0,084	0,168
25 Hz	-21,03	0,089	0,178
50 Hz	-20,29	0,097	0,194
75 Hz	-20,11	0,099	0,198
100 Hz	-20,08	0,099	0,198
1 kHz	-20,06	0,099	0,199
10 kHz	-20,02	0,100	0,200
100 kHz	-20,01	0,100	0,200
1 MHz	-20,01	0,100	0,200
10 MHz	-19,99	0,100	0,200
25 MHz	-19,99	0,100	0,200
50 MHz	-20,01	0,100	0,200
60 MHz	-20,16	0,098	0,196
70 MHz	-20,29	0,097	0,194
80 MHz	-20,30	0,097	0,193
90 MHz	-20,06	0,099	0,199
100 MHz	-19,54	0,105	0,211
110 MHz	-18,39	0,120	0,241
120 MHz	-17,46	0,134	0,268
130 MHz	-17,13	0,139	0,278
140 MHz	-17,21	0,138	0,276
150 MHz	-17,49	0,133	0,267
160 MHz	-17,75	0,130	0,259
170 MHz	-18,17	0,123	0,247
180 MHz	-18,80	0,115	0,230
190 MHz	-19,37	0,108	0,215
200 MHz	-19,87	0,101	0,203

Table1: Transfer impedance: 1 Hz to 200 MHz, typical data

## RF PULSE CURRENT MONITORING PROBE

### 5 Accessory

Tekbox supplies a calibrator suitable for the TBPCP1-20100 current probe:



Picture 1: TBPCP1-CAL RF current probe calibration fixture

### 6 Ordering Information

Part Number	Description
TBPCP1-20100	Pulse Current Probe 20Hz – 100 MHz
TBCP1-CAL	Calibration fixture for TBPCP1-20100 current probe

### 7 History

Version	Date	Author	Changes
V 1.0	4.2.2023	Mayerhofer	Creation