

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com and in our download section.

Your contact

**Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:**

Tel.: **+49 - 81 41 - 52 71-0**

FAX: **+49 - 81 41 - 52 71-129**

E-Mail: sales@meilhaus.com

Downloads:
www.meilhaus.com/en/infos/download.htm

Meilhaus Electronic GmbH | Tel. **+49 - 81 41 - 52 71-0**
Am Sonnenlicht 2 | Fax **+49 - 81 41 - 52 71-129**
82239 Alling/Germany | E-Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Prices in Euro plus VAT. Errors and omissions excepted.
© Meilhaus Electronic.

www.meilhaus.de


Ethernet I/O: BusWorks® XT Series

XT1530 Ethernet Analog Output & Digital I/O Modules




ANALOG OUTPUT EXAMPLES

DC CURRENT OUTPUT





DISCRETE INPUT EXAMPLES

LOGIC (TTL) VOLTAGE ON/OFF

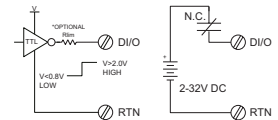

DISCRETE OUTPUT EXAMPLES

LAMP CONTROL

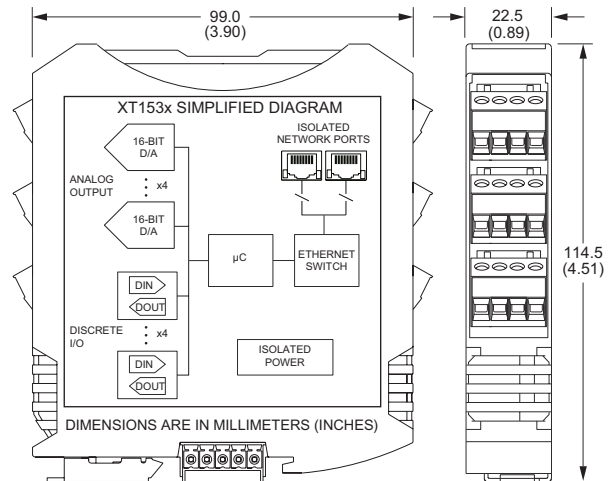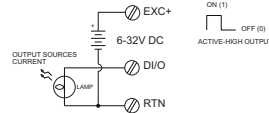

4 analog current outputs, 4 discrete I/O channels ♦ Modbus TCP/IP, Ethernet/IP, Profinet, or i2o communication

Description

The XT1530 interfaces analog output and discrete I/O signals between measurement and control devices over Ethernet. Discrete I/O are individually configurable for input or high-side switched output operation.

Rugged construction, high density design, and easy USB-to-PC/Windows setup combine for a very effective I/O solution. These units are ideal for remote monitoring, distributed control, or SCADA applications.

Analog Output Ranges

0-20mA DC, 4-20mA DC

Discrete Input/Output Ranges

Input: 0-32V DC, TTL thresholds
Output: 0-32V DC, open-source, up to 250mA

Ethernet Communication


Modbus TCP/IP, Ethernet/IP, Profinet, i2o® peer-to-peer, 10/100Base-T(X) PriorityChannel™ device determinism

Power Requirement

12 to 32V DC (2.8W)

Key Features & Benefits

- Multi-function, multi-channel stand alone module is very economical
- Easy setup with Windows software via USB
- Dual Ethernet 10/100 ports with built-in switch enables daisy-chain networking to reduce costs
- i2o technology for peer-to-peer communication without a network controller
- Four analog output channels (16-bit DACs) to drive remote instruments, controllers, recorders
- Four discrete input/output channels support loopback monitoring of output levels
- Built-in 10K ohm pull-down resistors for use with 2/3-wire sensors (contacts, proximity, TTL)
- Configurable normal/reverse input logic
- Various diagnostics validate module operation
- 1500V AC isolation (between I/O, power, and network ports) and surge/transient protection
- Slim 22.5mm housing with pluggable terminals
- Supports bussed/rail and redundant power
- 40°C to +60°C wide temperature operation
- CE and UL/cUL Class 1 Div 2 Zone 2 approvals. ATEX Certified.

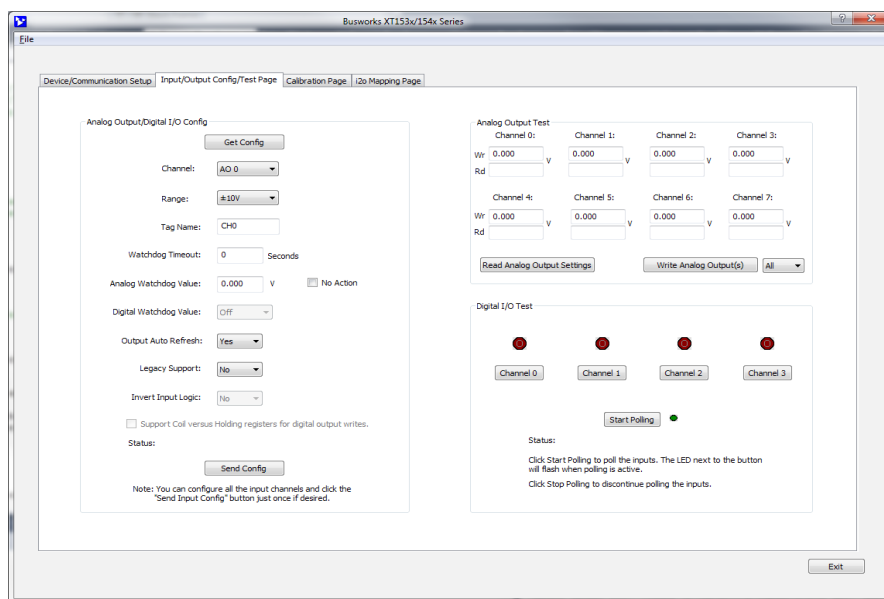

BusWorks XT software (download free from www.acromag.com) allows you to configure I/O modules offline with USB, save the file, and download settings into units later, at your convenience.





Ethernet I/O: BusWorks® XT Series

XT1530 Ethernet Multi-Function Analog Output & Digital I/O Modules

Performance Specifications

IMPORTANT: To prevent damage or errors from grounded PCs and surges, Acromag strongly recommends use of the USB-ISOLATOR when configuring an XT1000 I/O module.

■ USB Interface

USB Connector

Type: USB Mini-B type socket, 5-pin
Data rate: 12Mbps. USB v1.1 and 2.0 compatible
Maximum cable length: 5.0 meters

USB Transient Protection

Transient voltage suppression on power and data lines

Driver

Not required. Uses Windows HID drivers

■ Analog Output

Configuration

4 output channels, each with a 16-bit D/A converter

Output Type

0-20mA DC or 4-20mA DC, configurable by channel

Accuracy

Better than $\pm 0.1\%$ of span

Output Excitation

Separate inputs for 12V (10-15V) and 24V (20-28V) power sources. Diode-coupled to support redundancy.

■ Discrete Input

Input Type

4 active-high, buffered inputs, with a common connection. Inputs are tied in tandem to output drains for optional loopback monitoring of output state.

Input Signal Voltage Range

0 to 32V DC

Input Current

280 μ A, typical at 32V DC

Input Signal Threshold

1.7V DC typical with 100mV of hysteresis

Input Resistance

10K ohms, typical

Input Response Time

10ms, nominal

■ Discrete Output

Output Type

4 open-source, smart, p-channel mosfet switches with a common drain connection. Provides high-side (sourcing) switching between the load and return.

Output Signal Voltage Range

0 to 32V DC. 6-32V excitation source required.

Output "ON" Resistance

0.5 ohms typical, 1.0 ohms maximum

Output "ON" Current Range

0 to 250mA DC, continuous (up to 1A total for all 4 channels combined)

Output Response Time

10ms, nominal

■ Ethernet Communication

Protocols

Modbus TCP/IP, i2o peer-to-peer, Ethernet/IP, or Profinet depending on model number.

Ethernet Communication Controller

Innovasic RapiD™ Platform with PriorityChannel™ for determinism at the device regardless of network load.

Modbus TCP/IP (slave)

Port 502 reserved. Supports up to 10 sockets

i2o Peer-to-Peer (master/slave)

Can map 4-channel input groups to output groups at two destination IP addresses. Timed or change-of-state updates. Supports GPRS/GSM systems.

Ethernet/IP (adapter)

Supports 16 connections. EDS file on website

Profinet (server)

Supports 1 connection. GSDML file on website

Connectors

Two shielded 8-pin RJ-45 sockets, 10BaseT/100BaseTX

Wiring

Auto-crossover for MDI or MDI-X

IP Address

User-configurable. 192.168.1.100 default static IP address.

Data Rate

Auto-negotiated, 10Mbps or 100Mbps

Compliance

IEEE 802.3, 802.3u, 802.3x

■ Environmental

Operating and Storage Temperature

Operating: -40 to 60°C (-40 to 140°F)
Storage: -40 to 85°C (-40 to 185°F)

Relative Humidity

5 to 95% non-condensing

Power Requirement

12 to 32V DC (110mA maximum @ 24V)

Isolation

I/O channels (as a group), network (each port), and power circuits isolated from each other.
Peak: 1500V AC, ANSI/ISA-82.01-1988
Continuous: 250V AC, 354V DC

Electromagnetic Compatibility (EMC) Compliance

Radiated Emissions: BS EN 61000-6-4, CISPR 16
RFI: BS EN 61000-6-2, IEC 61000-4-3
Conducted RFI: BS EN 61000-6-2, IEC 61000-4-6
ESD: BS EN 61000-6-2, IEC 61000-4-2
EFT: BS EN 61000-6-2, IEC 61000-4-4
Surge Immunity: BS EN 61000-6-2, IEC 61000-4-5

MTBF: 445,034 hrs. at 25°C

335,836 hrs. at 40°C

Shock and Vibration Immunity

Vibration: 4g, per IEC 60068-2-64
Shock: 25g, per IEC 60068-2-27

Approvals

CE compliant. UL/cUL listings. ATEX Certified.
Designed for Class I; Division 2; Groups ABCD; Zone 2.
☞ II 3 G Ex nA IIC T4 Gc -40°C ≤ Ta ≤ +80°C

■ Physical

General

General purpose plastic enclosure for mounting on 35mm "T-type" DIN rail

Case Material

Self-extinguishing polyamide, UL94 V-0 rated, color light gray. General purpose NEMA Type 1 enclosure.

Circuit Board

Military grade fire-retardant epoxy glass (IPC-4101/98)

I/O Connectors

Removable plug-in type terminal blocks rated for 12A/250V; AWG #26-12, stranded/solid copper wire.

Dimensions

Width = 22.5mm (0.9 inches), Length = 114.5mm (4.51 inches), Depth = 99.0mm (3.90 inches)

Shipping Weight

0.5 pounds (0.22 Kg) packed

Ordering Information

◆ Models

[XT1531-000](#)

Multi-function 4-ch analog current output, 4-ch digital I/O module, Modbus/TCP and i2o protocol

[XT1532-000](#)

Multi-function 4-ch analog current output, 4-ch digital I/O module, Ethernet/IP protocol

[XT1533-000](#)

Multi-function 4-ch analog current output, 4-ch digital I/O module, Profinet protocol

◆ Software

[XT-SIP](#) (recommend one kit per customer)

Software Interface Package. Includes software (XT-CONFIG), isolator (USB-ISOLATOR), two USB cables (4001-112, 4001-113), Ethernet cable (5035-360).

◆ Accessories

[XT BUS-KIT](#)

DIN rail bus power/excitation connector kit. Includes one DIN rail bus connector (1005-070), one left-side female connector terminal block (1005-220) and one right side male connector terminal block (1005-221).

[USB-ISOLATOR](#)

USB-to-USB isolator, includes USB cable (4001-112)

ISO9001
AS9100

