

## Product Datasheet - Technical Specifications



More information in our Web-Shop at ► [www.meilhaus.com](http://www.meilhaus.com)

### Your contact

Technical and commercial sales, price information,  
quotations, demo/test equipment, consulting:

Tel.: **+49 - (0)81 41 - 52 71-0**

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

**Meilhaus Electronic GmbH**  
Am Sonnenlicht 2  
82239 Alling/Germany

Tel. **+49 - (0)81 41 - 52 71-0** E-  
Mail [sales@meilhaus.com](mailto:sales@meilhaus.com)

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

[www.meilhaus.com](http://www.meilhaus.com)

# R&S®ZN-ZE1xx CALIBRATION UNITS

## Specifications

R&S®ZN-ZE104

R&S®ZN-ZE109

R&S®ZN-ZE118

R&S®ZN-ZE126



Specifications | Version 04.00

**ROHDE & SCHWARZ**

Make ideas real



# CONTENTS

|                                                                                         |           |
|-----------------------------------------------------------------------------------------|-----------|
| <b>Definitions.....</b>                                                                 | <b>3</b>  |
| <b>Specifications.....</b>                                                              | <b>5</b>  |
| Calibration units for automatic calibration .....                                       | 5         |
| Port options for the R&S®ZN-ZE104 .....                                                 | 5         |
| Port options for the R&S®ZN-ZE109 .....                                                 | 6         |
| Port options for the R&S®ZN-ZE118 .....                                                 | 7         |
| Port options for the R&S®ZN-ZE126 .....                                                 | 8         |
| Input power limits .....                                                                | 9         |
| Effective system data .....                                                             | 10        |
| R&S®ZN-ZE104, R&S®ZN-ZE109, R&S®ZN-ZE118 (type N, female and male).....                 | 10        |
| R&S®ZN-ZE104, R&S®ZN-ZE109, R&S®ZN-ZE118, R&S®ZN-ZE126, (3.5 mm, female and male) ..... | 10        |
| General data .....                                                                      | 11        |
| <b>Ordering information .....</b>                                                       | <b>13</b> |
| Accredited calibration .....                                                            | 13        |
| <b>Warranty and service.....</b>                                                        | <b>14</b> |

# Definitions


## General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

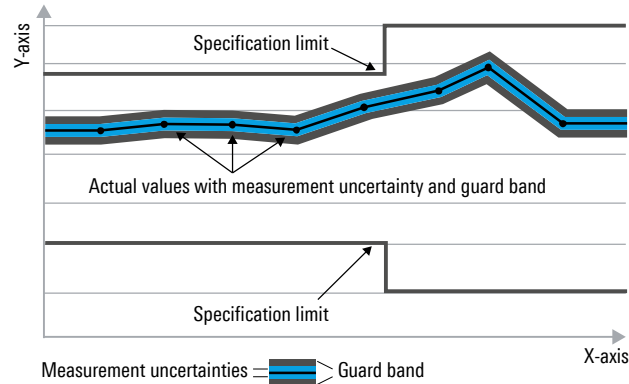

**Specifications without limits**

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

**Typical data (typ.)**

Characterizes product performance by means of representative information for the given parameter. When marked with <, > or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

**Nominal values (nom.)**

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

**Measured values (meas.)**

Characterize expected product performance by means of measurement results gained from individual samples.

**Uncertainties**

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

# Specifications

## Calibration units for automatic calibration

### Port options for the R&S®ZN-ZE104

| Type                                 | Connector                                                        | Number of ports | Frequency range  |
|--------------------------------------|------------------------------------------------------------------|-----------------|------------------|
| R&S®ZNZE1-B170 and<br>R&S®ZNZE1 B270 | type N, female and<br>type N, female                             | 2               | 5 kHz to 4.5 GHz |
| R&S®ZNZE1-B171 and<br>R&S®ZNZE1-B270 | type N, male and<br>type N, female                               |                 |                  |
| R&S®ZNZE1-B170 and<br>R&S®ZNZE1-B271 | type N, female and<br>type N, male                               |                 |                  |
| R&S®ZNZE1-B171 and<br>R&S®ZNZE1-B271 | type N, male and<br>type N, male                                 |                 |                  |
| R&S®ZNZE1-B130 and<br>R&S®ZNZE1-B230 | 3.5 mm <sup>1</sup> , female and<br>3.5 mm <sup>1</sup> , female |                 |                  |
| R&S®ZNZE1-B131 and<br>R&S®ZNZE1-B230 | 3.5 mm <sup>1</sup> , male and<br>3.5 mm <sup>1</sup> , female   |                 |                  |
| R&S®ZNZE1-B130 and<br>R&S®ZNZE1-B231 | 3.5 mm <sup>1</sup> , female and<br>3.5 mm <sup>1</sup> , male   |                 |                  |
| R&S®ZNZE1-B131 and<br>R&S®ZNZE1-B231 | 3.5 mm <sup>1</sup> , male and<br>3.5 mm <sup>1</sup> , male     |                 |                  |

---

<sup>1</sup> Connectors of the R&S®ZNZE1-B130, R&S®ZNZE1-B131, R&S®ZNZE1-B230 and R&S®ZNZE1-B231 port options are not 3.5 mm connectors, but fully support these. They are mechanically compatible and electrically equivalent.

## Port options for the R&S®ZN-ZE109

| Type                                 | Connector                                                        | Number of ports | Frequency range |
|--------------------------------------|------------------------------------------------------------------|-----------------|-----------------|
| R&S®ZNZE1-B170 and<br>R&S®ZNZE1 B270 | type N, female and<br>type N, female                             | 2               | 5 kHz to 9 GHz  |
| R&S®ZNZE1-B171 and<br>R&S®ZNZE1-B270 | type N, male and<br>type N, female                               |                 |                 |
| R&S®ZNZE1-B170 and<br>R&S®ZNZE1-B271 | type N, female and<br>type N, male                               |                 |                 |
| R&S®ZNZE1-B171 and<br>R&S®ZNZE1-B271 | type N, male and<br>type N, male                                 |                 |                 |
| R&S®ZNZE1-B130 and<br>R&S®ZNZE1-B230 | 3.5 mm <sup>1</sup> , female and<br>3.5 mm <sup>1</sup> , female |                 |                 |
| R&S®ZNZE1-B131 and<br>R&S®ZNZE1-B230 | 3.5 mm <sup>1</sup> , male and<br>3.5 mm <sup>1</sup> , female   |                 |                 |
| R&S®ZNZE1-B130 and<br>R&S®ZNZE1-B231 | 3.5 mm <sup>1</sup> , female and<br>3.5 mm <sup>1</sup> , male   |                 |                 |
| R&S®ZNZE1-B131 and<br>R&S®ZNZE1-B231 | 3.5 mm <sup>1</sup> , male and<br>3.5 mm <sup>1</sup> , male     |                 |                 |

**Port options for the R&S®ZN-ZE118**

| Type                                 | Connector                                                        | Number of ports | Frequency range |
|--------------------------------------|------------------------------------------------------------------|-----------------|-----------------|
| R&S®ZNZE1-B170 and<br>R&S®ZNZE1 B270 | type N, female and<br>type N, female                             | 2               | 5 kHz to 18 GHz |
| R&S®ZNZE1-B171 and<br>R&S®ZNZE1-B270 | type N, male and<br>type N, female                               |                 |                 |
| R&S®ZNZE1-B170 and<br>R&S®ZNZE1-B271 | type N, female and<br>type N, male                               |                 |                 |
| R&S®ZNZE1-B171 and<br>R&S®ZNZE1-B271 | type N, male and<br>type N, male                                 |                 |                 |
| R&S®ZNZE1-B130 and<br>R&S®ZNZE1-B230 | 3.5 mm <sup>1</sup> , female and<br>3.5 mm <sup>1</sup> , female |                 |                 |
| R&S®ZNZE1-B131 and<br>R&S®ZNZE1-B230 | 3.5 mm <sup>1</sup> , male and<br>3.5 mm <sup>1</sup> , female   |                 |                 |
| R&S®ZNZE1-B130 and<br>R&S®ZNZE1-B231 | 3.5 mm <sup>1</sup> , female and<br>3.5 mm <sup>1</sup> , male   |                 |                 |
| R&S®ZNZE1-B131 and<br>R&S®ZNZE1-B231 | 3.5 mm <sup>1</sup> , male and<br>3.5 mm <sup>1</sup> , male     |                 |                 |

## Port options for the R&S®ZN-ZE126

| Type                                 | Connector                                                        | Number of ports | Frequency range   |
|--------------------------------------|------------------------------------------------------------------|-----------------|-------------------|
| R&S®ZNZE1-B130 and<br>R&S®ZNZE1-B230 | 3.5 mm <sup>1</sup> , female and<br>3.5 mm <sup>1</sup> , female | 2               | 5 kHz to 26.5 GHz |
| R&S®ZNZE1-B131 and<br>R&S®ZNZE1-B230 | 3.5 mm <sup>1</sup> , male and<br>3.5 mm <sup>1</sup> , female   |                 |                   |
| R&S®ZNZE1-B130 and<br>R&S®ZNZE1-B231 | 3.5 mm <sup>1</sup> , female and<br>3.5 mm <sup>1</sup> , male   |                 |                   |
| R&S®ZNZE1-B131 and<br>R&S®ZNZE1-B231 | 3.5 mm <sup>1</sup> , male and<br>3.5 mm <sup>1</sup> , male     |                 |                   |

## Input power limits

|                           |  |                    |
|---------------------------|--|--------------------|
| Nominal input level range |  | –45 dBm to +10 dBm |
| Damage level              |  | +10 dBm            |
| Damage DC voltage         |  | 0 V                |

## Effective system data

### R&S®ZN-ZE104, R&S®ZN-ZE109, R&S®ZN-ZE118 (type N, female and male)

|                                  | 5 kHz to 4.5 GHz         | 4.5 GHz to 9 GHz         | 9 GHz to 18 GHz          |
|----------------------------------|--------------------------|--------------------------|--------------------------|
| Directivity                      | ≥ 39 dB, 41 dB (typ.)    | ≥ 39 dB, 41 dB (typ.)    | ≥ 37 dB, 39 dB (typ.)    |
| Match                            | ≥ 37 dB, 39 dB (typ.)    | ≥ 37 dB, 39 dB (typ.)    | ≥ 35 dB, 37 dB (typ.)    |
| Reflection/transmission tracking | ≤ 0.1 dB, 0.05 dB (typ.) | ≤ 0.1 dB, 0.05 dB (typ.) | ≤ 0.1 dB, 0.05 dB (typ.) |

### R&S®ZN-ZE104, R&S®ZN-ZE109, R&S®ZN-ZE118, R&S®ZN-ZE126, (3.5 mm, female and male)

|                                  | 5 kHz to 4.5 GHz         | 4.5 GHz to 9 GHz         | 9 GHz to 18 GHz          | 18 GHz to 26.5 GHz        |
|----------------------------------|--------------------------|--------------------------|--------------------------|---------------------------|
| Directivity                      | ≥ 39 dB, 41 dB (typ.)    | ≥ 39 dB, 41 dB (typ.)    | ≥ 37 dB, 39 dB (typ.)    | ≥ 36 dB, 38 dB (typ.)     |
| Match                            | ≥ 37 dB, 39 dB (typ.)    | ≥ 37 dB, 39 dB (typ.)    | ≥ 35 dB, 37 dB (typ.)    | ≥ 33 dB, 35 dB (typ.)     |
| Reflection/transmission tracking | ≤ 0.1 dB, 0.05 dB (typ.) | ≤ 0.1 dB, 0.05 dB (typ.) | ≤ 0.1 dB, 0.05 dB (typ.) | ≤ 0.12 dB, 0.06 dB (typ.) |

## General data

|                       |                               |                                                                                                                                                                    |
|-----------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature loading   | operating temperature range   | +5 °C to +40 °C                                                                                                                                                    |
|                       | permissible temperature range | 0 °C to +50 °C                                                                                                                                                     |
|                       | storage temperature range     | –40 °C to +70 °C,<br>in line with IEC 60068-2-1 and<br>IEC 60068-2-2                                                                                               |
| Damp heat             |                               | +40 °C at 85 % relative humidity                                                                                                                                   |
| Mechanical resistance | vibration test, sinusoidal    | 5 Hz to 55 Hz, displacement:<br>0.15 mm constant amplitude<br>(1.8 g at 55 Hz);<br>55 Hz to 150 Hz,<br>acceleration: 0.5 g constant,<br>in line with IEC 60068-2-6 |
|                       | vibration test, random        | 8 Hz to 500 Hz,<br>acceleration: 1.2 g (RMS),<br>in line with IEC 60068-2-64                                                                                       |
|                       | shock test                    | 40 g shock spectrum,<br>in line with MIL-STD-810E,<br>method no. 516.4, procedure I                                                                                |
| Calibration interval  |                               | 12 months                                                                                                                                                          |

|                    |                                     |                                                                                                                                                                                                                                                  |
|--------------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC                | RF emission                         | in line with CISPR 11/EN 55011 group 1 class A (for a shielded test setup); Instrument complies with the emission requirements stipulated by EN 55011 and EN 61326-1 class A, making the instrument suitable for use in industrial environments. |
|                    | immunity                            | in line with EMC Directive 2014/30/EU, including IEC/EN 61326-1 (immunity test requirement for industrial environment, EN 61326 table 2)                                                                                                         |
| EU legislation     | for details, see user documentation | EU: in line with Data Act – Regulation (EU) 2023/2854                                                                                                                                                                                            |
| Power supply       | via USB                             | 5 V, 350 mA                                                                                                                                                                                                                                      |
| Power consumption  |                                     | 1.75 W                                                                                                                                                                                                                                           |
| Digital connection | calibration unit side               | USB type C plug, version 2.0                                                                                                                                                                                                                     |
|                    | host side                           | USB type A plug                                                                                                                                                                                                                                  |
|                    | cable length                        | 1.85 m (72.8 in)                                                                                                                                                                                                                                 |
| Dimensions         | W × H × D                           | 109 mm × 90 mm × 32 mm<br>(4.29 in × 3.54 in × 1.25 in)                                                                                                                                                                                          |
| Weight             |                                     | 108 g (0.23 lb)                                                                                                                                                                                                                                  |

## Ordering information

| Designation                                 | Type           | Order No.    |
|---------------------------------------------|----------------|--------------|
| Calibration unit, 2-port, 5 kHz to 4.5 GHz  | R&S®ZN-ZE104   | 1350.8040.04 |
| Calibration unit, 2-port, 5 kHz to 9 GHz    | R&S®ZN-ZE109   | 1350.8040.09 |
| Calibration unit, 2-port, 5 kHz to 18 GHz   | R&S®ZN-ZE118   | 1350.8040.18 |
| Calibration unit, 2-port, 5 kHz to 26.5 GHz | R&S®ZN-ZE126   | 1350.8040.26 |
| <b>Port options <sup>2</sup></b>            |                |              |
| Connector port 1, type N, female            | R&S®ZNZE1-B170 | 1350.8079.70 |
| Connector port 1, type N, male              | R&S®ZNZE1-B171 | 1350.8085.71 |
| Connector port 2, type N, female            | R&S®ZNZE1-B270 | 1350.8079.80 |
| Connector port 2, type N, male              | R&S®ZNZE1-B271 | 1350.8085.81 |
| Connector port 1, supports 3.5 mm, female   | R&S®ZNZE1-B130 | 1350.8056.30 |
| Connector port 1, supports 3.5 mm, male     | R&S®ZNZE1-B131 | 1350.8062.31 |
| Connector port 2, supports 3.5 mm, female   | R&S®ZNZE1-B230 | 1350.8056.40 |
| Connector port 2, supports 3.5 mm, male     | R&S®ZNZE1-B231 | 1350.8062.41 |

## Accredited calibration

| Designation                                 | Type           | Order No.    |
|---------------------------------------------|----------------|--------------|
| Calibration unit, 2-port, 5 kHz to 4.5 GHz  | R&S®ACAZNZE104 | 3599.0424.03 |
| Calibration unit, 2-port, 5 kHz to 9 GHz    | R&S®ACAZNZE109 | 3599.0430.03 |
| Calibration unit, 2-port, 5 kHz to 18 GHz   | R&S®ACAZNZE118 | 3599.0447.03 |
| Calibration unit, 2-port, 5 kHz to 26.5 GHz | R&S®ACAZNZE126 | 3599.0453.03 |

<sup>2</sup> Type N connectors are not applicable to R&S®ZN-ZE126.

## Warranty and service

| Warranty                                                       |                               |                       |
|----------------------------------------------------------------|-------------------------------|-----------------------|
| Base unit                                                      |                               | 1 year                |
| All other items                                                |                               | 1 year                |
| Service options                                                |                               |                       |
|                                                                | Service plans                 | On demand             |
| Calibration                                                    | up to five years <sup>3</sup> | pay per calibration   |
| Warranty and repair                                            | up to five years <sup>3</sup> | standard price repair |
| Contact your Rohde & Schwarz sales office for further details. |                               |                       |

---

<sup>3</sup> For extended periods, contact your Rohde & Schwarz sales office.

## Service at Rohde & Schwarz You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

## Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

Certified Environmental Management

**ISO 14001**

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners  
PD 3683.5597.22 | Version 04.00 | October 2025 (ch)  
R&S®ZN-ZE1xx Calibration Units  
Data without tolerance limits is not binding | Subject to change  
© 2022 - 2025 Rohde & Schwarz | 81671 Munich, Germany