

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. +49 - (0)81 41 - 52 71-0 E-
Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

USB 2.0 Ranger® 2304

4-Port USB 2.0 100m CAT 5e/6/7 Extender System

The USB 2.0 Ranger 2304 is the latest in a long line of reliable point-to-point USB 2.0 extender systems from Icron Technologies. It features full device and host support, including newer USB 3.0 compatible devices and controllers, and fast USB 2.0 throughputs.



Features

The Ranger 2304 extends all USB 2.0 peripherals such as flash drives, keyboards, mice, webcams and interactive whiteboards across a dedicated CAT 5e/6/7 connection.


- USB 2.0 throughput up to 480Mbps
- Integrated hub provides ports for four USB devices, use hubs to add more
- Supplies up to 600mA to each USB port concurrently
- Operates with all USB controllers

Includes the ExtremeUSB® suite of features:

- Transparent USB extension
- True plug and play; no software drivers required
- Works with all major operating systems: Windows®, macOS™, Linux® and Chrome OS™

Applications

- Remote storage
- Professional Audio-Visual
- Security and monitoring
- Keyboard and mouse

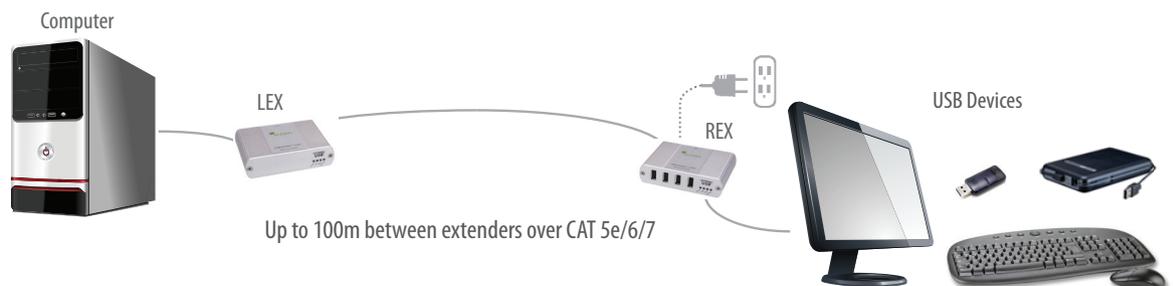

icron
An Analog Devices Brand

EXTREME-USB

Specifications subject to change without notification.

©2022

Icron | An Analog Devices Brand

#90-01097-D01

USB 2.0 Ranger® 2304 Specifications



RANGE

Direct Connect: Up to 100m (330 ft) over solid core CAT 5e/6/7

USB DEVICE SUPPORT

Maximum USB 2.0 Throughput: Up to 480Mbps

Maximum USB 1.1 Throughput: Up to 12Mbps

Traffic Types: All USB 2.0 and 1.1 Traffic Types

Device Types: All USB 2.0 and 1.1 Device Types

LEX (LOCAL EXTENDER)

USB Connector: 1 x USB Type B Receptacle

Link Connector: 1 x RJ45

Dimensions: 100mm x 76mm x 26mm (3.9" x 3.0" x 1.0")

Enclosure Material: Silver Anodized Aluminum

REX (REMOTE EXTENDER)

USB Connectors: 4 x USB Type A Receptacles

Link Connector: 1 x RJ45

Dimensions: 100mm x 76mm x 26mm (3.9" x 3.0" x 1.0")

Enclosure Material: Silver Anodized Aluminum

Available Current: Up to 600mA to each USB port

Power Supply: 100-240V AC Input, 1A 24V DC Output

ENVIRONMENTAL

Operating Temperature: 0°C to 50°C (32°F to 122°F)

Storage Temperature: -20°C to 70°C (-4°F to 158°F)

Operating Humidity: 20% to 80% relative humidity, non-condensing

Storage Humidity: 10% to 90% relative humidity, non-condensing

COMPLIANCE

Certifications: FCC (Class B), CE (Class B), RoHS2/3 (CE), ICES-003 Issue 7, EN 62368-1

SUPPORT

Warranty: 2-year



Ordering Information

The USB 2.0 Ranger® 2304 system includes a LEX, REX, USB Cable, Quick Start Guide, international power adapter with country specific power cord and two-year warranty.

PART #	NAME	DESCRIPTION
00-00347	USB 2.0 Ranger® 2304 - NA	4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, NA Power Cord
00-00348	USB 2.0 Ranger® 2304 - EU	4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, EU Power Cord
00-00349	USB 2.0 Ranger® 2304 - UK	4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, UK Power Cord
00-00350	USB 2.0 Ranger® 2304 - AU	4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, AU Power Cord
00-00373	USB 2.0 Ranger® 2304 - JP	4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, JP Power Cord